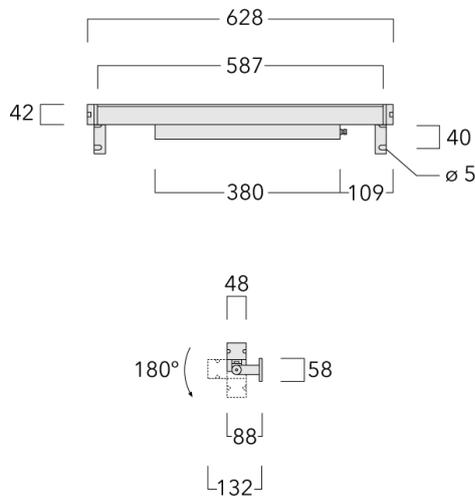


Wall luminaires surface mounted



Description

IP67, Class I. IK09. Marine-grade, all aluminium construction. 5CE superior corrosion protection + primer including PCS hardware. PMMA cover. Silicone rubber gasket. Linear PMMA LED lens. 1.2 m connecting cable, UV stabilized, PVC free. Luminaire is factory sealed and does not need to be opened during installation and can be tilted up to 180°. Integral LED driver with DALI interface. Optional 2200 K version available. To be specified at time of ordering.

Separate LED driver on request.

Wall luminaires surface mounted

Specifications**Material description**

| | |
|----------------------|---|
| Body | Marine-grade, all-aluminium construction |
| Lens | PMMA |
| Colours |  RAL9004 Signal black  RAL9006 White aluminium  RAL9007 Grey aluminium |
| Gasket | Silicone rubber gasket |
| Fasteners | PCS Polymer Coated Stainless Steel Hardware (unpainted) |
| Ingress protection | IP67 |
| Impact resistance | IK09 |
| Corrosion resistance | 5CE+Primer |

Electrical description

| | |
|------------------|---|
| Power supply | 230V / 50 Hz |
| Driver / Ballast | Integral LED driver with DALI Interface |

Additional information

| | |
|----------|--|
| Lifetime | Ta=40° L90B10 > 90000h |
| Warranty | The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on www.we-ef.com for further details. |

Wall luminaires surface mounted

Options

Light distribution



symmetric linear, medium beam [LM]



symmetric linear, narrow beam [LE]



symmetric linear, very narrow beam [LEE]



symmetric linear, wide beam [LB]



symmetric linear, wide beam [LB/IW - Honeycomb]



symmetric linear, medium beam [LM/IW - Honeycomb]



symmetric linear, narrow beam [LE/IW - Honeycomb]

Colour temperature



3000 K



4000 K










2700 K

Nominal Watt

19 W


Wall luminaires surface mounted

Configurations

| Light distribution | Part ID | Light source | Rated lumens | Rated input power | CRI | Weight (kg) |
|--|----------|------------------------------|--------------|-------------------|-----|-------------|
| symmetric linear, medium beam [LM/ IW - Honeycomb]  | 187-0488 | LED-32/20W / 225 mA - 3000 K | 1068.8 | 23.5 W | 80 | 2.45 |
| | 187-0489 | LED-32/20W / 225 mA - 4000 K | 1068.8 | 23.5 W | 80 | 2.45 |
| | 187-0582 | LED-32/20W / 225 mA - 2700 K | 1068.8 | 23.5 W | 80 | 2.45 |
| symmetric linear, medium beam [LM]  | 187-0002 | LED-32/20W / 225 mA - 3000 K | 2140.4 | 23.5 W | 80 | 2.45 |
| | 187-0035 | LED-32/20W / 225 mA - 4000 K | 2140.4 | 23.5 W | 80 | 2.45 |
| | 187-0460 | LED-32/20W / 225 mA - 2700 K | 2140.4 | 23.5 W | 80 | 2.45 |
| symmetric linear, narrow beam [LE/ IW - Honeycomb]  | 187-0490 | LED-32/20W / 225 mA - 3000 K | 1113.7 | 23.5 W | 80 | 2.45 |
| | 187-0491 | LED-32/20W / 225 mA - 4000 K | 1113.7 | 23.5 W | 80 | 2.45 |
| | 187-0583 | LED-32/20W / 225 mA - 2700 K | 1113.7 | 23.5 W | 80 | 2.45 |
| symmetric linear, narrow beam [LE]  | 187-0006 | LED-32/20W / 225 mA - 3000 K | 2101.3 | 23.5 W | 80 | 2.45 |
| | 187-0036 | LED-32/20W / 225 mA - 4000 K | 2101.3 | 23.5 W | 80 | 2.45 |
| | 187-0535 | LED-32/20W / 225 mA - 2700 K | 2101.3 | 23.5 W | 80 | 2.45 |
| symmetric linear, very narrow beam [LEE]  | 187-0010 | LED-32/20W / 225 mA - 3000 K | 2405.9 | 23.5 W | 80 | 2.45 |
| | 187-0037 | LED-32/20W / 225 mA - 4000 K | 2405.9 | 23.5 W | 80 | 2.45 |
| | 187-0536 | LED-32/20W / 225 mA - 2700 K | 2405.9 | 23.5 W | 80 | 2.45 |
| symmetric linear, wide beam [LB/IW - Honeycomb]  | 187-0486 | LED-32/20W / 225 mA - 3000 K | 851.5 | 23.5 W | 80 | 2.45 |
| | 187-0487 | LED-32/20W / 225 mA - 4000 K | 851.5 | 23.5 W | 80 | 2.45 |
| | 187-0581 | LED-32/20W / 225 mA - 2700 K | 851.5 | 23.5 W | 80 | 2.45 |
| symmetric linear, wide beam [LB]  | 187-0024 | LED-32/20W / 225 mA - 3000 K | 1915.7 | 23.5 W | 80 | 2.45 |
| | 187-0038 | LED-32/20W / 225 mA - 4000 K | 1915.7 | 23.5 W | 80 | 2.45 |
| | 187-0534 | LED-32/20W / 225 mA - 2700 K | 1915.7 | 23.5 W | 80 | 2.45 |

VLR120

Wall luminaires surface mounted

| Light distribution | Part ID | Light source | Rated lumens | Rated input power | CRI | Weight (kg) |
|--|---------|--------------|--------------|-------------------|-----|-------------|
|  | | | | | | |