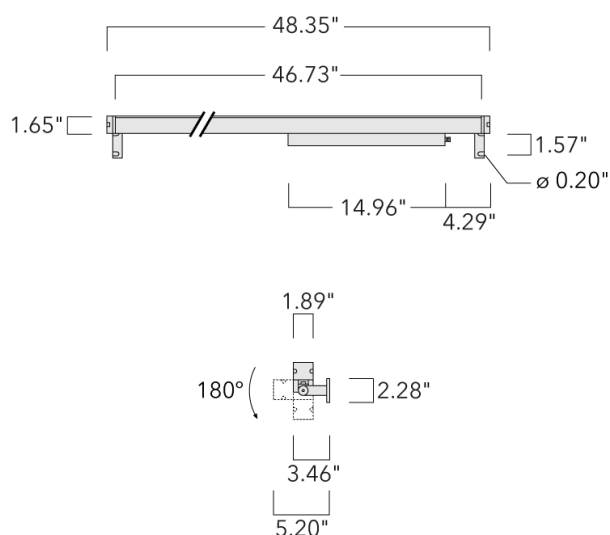


Surface Mounted Wall Luminaires

**Description**

IP67. Class I. IK09. Marine-grade, all aluminum construction. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Linear PMMA LED lens, PMMA cover. 4 ft connecting cable, UV stabilized, PVC free. Integral LED driver; separate LED driver available instead, on request at time of order. 0-10V Dimming comes standard with luminaire. Luminaire is factory-sealed and does not need to be opened during installation and can be tilted up to 180°.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)
+ XXX-XXXX (Accessory 1)

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 07/18/2025

Surface Mounted Wall Luminaires

Specifications

Material description

Body	Marine-grade, all-aluminium construction
Lens	PMMA
Colors	<div><div></div> RAL9004 Black</div> <div><div></div> RAL9007 Grey Metallic</div> <div><div></div> RAL9016 White</div> <div><div></div> RAL8019 Dark Bronze</div>
Gasket	Silicone rubber gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP67
Impact resistance	IK09
Corrosion resistance	5CE

Electrical description

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Driver / Ballast	LED driver with 0-10V Interface

Additional information

Lifetime	Ta=25°/40° L90B10 > 90000h
Listings	ETL Listed. Suitable for wet locations.

VLR140



Surface Mounted Wall Luminaires

Options

Light distribution



symmetric linear, medium beam [LM]



symmetric linear, narrow beam [LN]



symmetric linear, wide beam [LW]



symmetric linear, very narrow beam [LVN]



symmetric linear, wide beam [LW/IW]



symmetric linear, medium beam [LM/IW]



symmetric linear, narrow beam [LN/IW]

Color temperature



3000 K



4000 K



2700 K

Nominal Watt

35 W







0 W

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030
customersupport.usa@we-ef.com - <https://we-ef.com/us>
Subject to technical changes and errors. - Generated on 07/18/2025

Surface Mounted Wall Luminaires

Configurations

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI	Weight (lb)
symmetric linear, medium beam [LM/IW] 	187-0508	LED-64/40W / 225 mA - 3000 K	2137.6	44 W	80	8.82
	187-0509	LED-64/40W / 225 mA - 4000 K	2137.6	44 W	80	8.82
	187-0592	LED-64/40W / 225 mA - 2700 K	2137.6	44 W	80	8.82
symmetric linear, medium beam [LM] 	187-0004	LED-64/40W / 225 mA - 3000 K	4280.8	44 W	80	8.82
	187-0043	LED-64/40W / 225 mA - 4000 K	4280.8	44 W	80	8.82
	187-0542	LED-64/40W / 225 mA - 2700 K	4280.8	44 W	80	8.82
symmetric linear, narrow beam [LN/IW] 	187-0510	LED-64/40W / 225 mA - 3000 K	2227.4	44 W	80	8.82
	187-0511	LED-64/40W / 225 mA - 4000 K	2227.4	44 W	80	8.82
	187-0593	LED-64/40W / 225 mA - 2700 K	2227.4	44 W	80	8.82
symmetric linear, narrow beam [LN] 	187-0008	LED-64/40W / 225 mA - 3000 K	4202.5	44 W	80	8.82
	187-0044	LED-64/40W / 225 mA - 4000 K	4202.5	44 W	80	8.82
	187-0543	LED-64/40W / 225 mA - 2700 K	4202.5	44 W	80	8.82
symmetric linear, very narrow beam [LVN] 	187-0012	LED-64/40W / 225 mA - 3000 K	4811.9	44 W	80	8.82
	187-0045	LED-64/40W / 225 mA - 4000 K	4811.9	44 W	80	8.82
	187-0544	LED-64/40W / 225 mA - 2700 K	4811.9	44 W	80	8.82
symmetric linear, wide beam [LW/IW] 	187-0506	LED-64/40W / 225 mA - 3000 K	1703	44 W	80	8.82
	187-0507	LED-64/40W / 225 mA - 4000 K	1703	44 W	80	8.82
	187-0591	LED-64/40W / 225 mA - 2700 K	1703	44 W	80	8.82
symmetric linear, wide beam [LW] 	187-0026	LED-64/40W / 225 mA - 3000 K	3831.5	44 W	80	8.82
	187-0046	LED-64/40W / 225 mA - 4000 K	3831.5	44 W	80	8.82


WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 07/18/2025

Surface Mounted Wall Luminaires

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI	Weight (lb)
	187-0541	LED-64/40W / 225 mA - 2700 K	3831.5	44 W	80	8.82