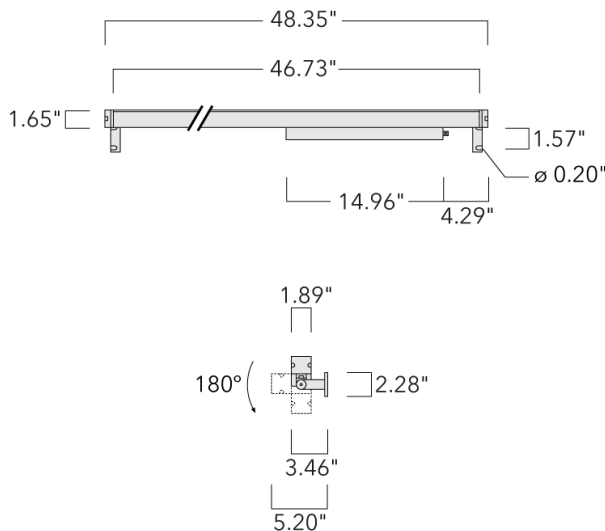


**Surface Mounted Wall Luminaires**



**Description**

IP67. Class I. IK09. Marine-grade, all aluminum construction. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Linear PMMA LED lens, PMMA cover. 4 ft connecting cable, UV stabilized, PVC free. Integral LED driver; separate LED driver available instead, on request at time of order. 0-10V Dimming comes standard with luminaire. Luminaire is factory-sealed and does not need to be opened during installation and can be tilted up to 180°.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)  
+ XXX-XXXX (Accessory 1)

**WE-EF LIGHTING USA, LLC**





410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030  
customersupport.usa@we-ef.com - <https://we-ef.com/us>  
Subject to technical changes and errors. - Generated on 11/23/2024

## Surface Mounted Wall Luminaires

## Specifications

## Material description

---

Body	Marine-grade, all-aluminium construction
Lens	PMMA
Colors	 RAL9004 Black  RAL9007 Grey Metallic  RAL9016 White  RAL8019 Dark Bronze
Gasket	Silicone rubber gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP67
Impact resistance	IK09
Corrosion resistance	5CE

---

## Electrical description

---

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Driver / Ballast	LED driver with 0-10V Interface

---

## Additional information

---

Lifetime	Ta=25°/40° L90B10 > 90000h
Listings	ETL Listed. Suitable for wet locations.

---

## WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030  
customersupport.usa@we-ef.com - <https://we-ef.com/us>  
Subject to technical changes and errors. - Generated on 11/23/2024

# VLR140

## Surface Mounted Wall Luminaires



### Options

#### Light distribution

#### Color temperature

#### Nominal Watt



symmetric linear, medium beam [LM]



3000 K

35 W

0 W



symmetric linear, narrow beam [LN]



4000 K



symmetric linear, wide beam [LW]



2700 K



symmetric linear, very narrow beam [LVN]



symmetric linear, wide beam [LW/IW]



symmetric linear, medium beam [LM/IW]



symmetric linear, narrow beam [LN/IW]

#### WE-EF LIGHTING USA, LLC







410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 11/23/2024

## Surface Mounted Wall Luminaires

## Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (lb)
symmetric linear, medium beam [LM/IW] 	187-0508	LED-64/40W / 225 mA - 3000 K	2137.6	44 W	80	8.82
	187-0509	LED-64/40W / 225 mA - 4000 K	2137.6	44 W	80	8.82
	187-0592	LED-64/40W / 225 mA - 2700 K	2137.6	44 W	80	8.82
symmetric linear, medium beam [LM] 	187-0004	LED-64/40W / 225 mA - 3000 K	4280.8	44 W	80	8.82
	187-0043	LED-64/40W / 225 mA - 4000 K	4280.8	44 W	80	8.82
	187-0542	LED-64/40W / 225 mA - 2700 K	4280.8	44 W	80	8.82
symmetric linear, narrow beam [LN/IW] 	187-0510	LED-64/40W / 225 mA - 3000 K	2227.4	44 W	80	8.82
	187-0511	LED-64/40W / 225 mA - 4000 K	2227.4	44 W	80	8.82
	187-0593	LED-64/40W / 225 mA - 2700 K	2227.4	44 W	80	8.82
symmetric linear, narrow beam [LN] 	187-0008	LED-64/40W / 225 mA - 3000 K	4202.5	44 W	80	8.82
	187-0044	LED-64/40W / 225 mA - 4000 K	4202.5	44 W	80	8.82
	187-0543	LED-64/40W / 225 mA - 2700 K	4202.5	44 W	80	8.82
symmetric linear, very narrow beam [LVN] 	187-0012	LED-64/40W / 225 mA - 3000 K	4811.9	44 W	80	8.82
	187-0045	LED-64/40W / 225 mA - 4000 K	4811.9	44 W	80	8.82
	187-0544	LED-64/40W / 225 mA - 2700 K	4811.9	44 W	80	8.82
symmetric linear, wide beam [LW/IW] 	187-0506	LED-64/40W / 225 mA - 3000 K	1703	44 W	80	8.82
	187-0507	LED-64/40W / 225 mA - 4000 K	1703	44 W	80	8.82
	187-0591	LED-64/40W / 225 mA - 2700 K	1703	44 W	80	8.82
symmetric linear, wide beam [LW] 	187-0026	LED-64/40W / 225 mA - 3000 K	3831.5	44 W	80	8.82
	187-0046	LED-64/40W / 225 mA - 4000 K	3831.5	44 W	80	8.82

## WE-EF LIGHTING USA, LLC


410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 11/23/2024

# VLR140

## Surface Mounted Wall Luminaires

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (lb)
	187-0541	LED-64/40W / 225 mA - 2700 K	3831.5	44 W	80	8.82

**WE-EF LIGHTING USA, LLC**

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030  
customersupport.usa@we-ef.com - <https://we-ef.com/us>  
Subject to technical changes and errors. - Generated on 11/23/2024