

Description

IP66. Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Remote driver & cable (to length) ordered separately. CAD-optimized optics for superior illumination and glare control. OLC® One LED Concept. Factory-installed LED circuit board. Luminaire is factory-sealed and does not need to be opened during installation.

Knuckle permits 350° horizontal and 90° vertical aiming of optics.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)
+ XXX-XXXX (Accessory 1)

Floodlights**Specifications****Material description**

Body	Marine-grade die-cast aluminium alloy
Lens	Clear tempered glass lens
Colors	<div><div></div> RAL9004 Black</div> <div><div></div> RAL9007 Grey Metallic</div> <div><div></div> RAL9016 White</div> <div><div></div> RAL8019 Dark Bronze</div>
Gasket	Silicone rubber gasket
Fasteners	PCS Polymer Coated Stainless Steel hardware
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE

Electrical description

Power supply	120V-277V. 0-10V dimmable, to be specified with order. Ordered Separately
Driver / Ballast	Remote EC electronic converter (sold separately)
Surge protection	Integral 10kV Surge Protector

Additional information

Ambient Temperature	Ta less than 25 deg C
Listings	ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations.

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030
customersupport.usa@we-ef.com - <https://we-ef.com/us>
Subject to technical changes and errors. - Generated on 08/14/2025







FLC121 LED REMOTE




Floodlights

Options







Light distribution

-  symmetric, wide beam [W]
-  symmetric, medium beam [M]
-  symmetric, very narrow beam [VN]
-  symmetric, very narrow beam, 'sharp cut-off' [VNS]
-  linear spread, very narrow beam [VN]
-  linear spread, very narrow beam, 'sharp cut-off'

Color temperature Nominal Watt

-  3000 K 16 W
-  4000 K

Configurations

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI	Weight (lb)
linear spread, very narrow beam [VN] 	145-0123+145-0050	LED-6/12W / 700 mA - 3000 K	1386.3	14.5 W	80	3.75
	145-0124+145-0050	LED-6/12W / 700 mA - 4000 K	1481.9	14.5 W	80	3.75
linear spread, very narrow beam, 'sharp cut-off' 	145-0126+145-0050	LED-6/12W / 700 mA - 3000 K	1526.2	14.5 W	80	3.75
	145-0127+145-0050	LED-6/12W / 700 mA - 4000 K	1631.5	14.5 W	80	3.75
symmetric, medium beam [M] 	145-0120	LED-6/12W / 700 mA - 3000 K	1511.8	14.5 W	80	3.75
	145-0121	LED-6/12W / 700 mA - 4000 K	1616.1	14.5 W	80	3.75
symmetric, very narrow beam [VN] 	145-0123	LED-6/12W / 700 mA - 3000 K	1496.5	14.5 W	80	3.75
	145-0124	LED-6/12W / 700 mA - 4000 K	1599.7	14.5 W	80	3.75
symmetric, very narrow beam, 'sharp cut-off' [VNS] 	145-0126+145-0145	LED-6/12W / 700 mA - 3000 K	1610.7	14.5 W	80	3.75
	145-0127	LED-6/12W / 700 mA - 4000 K	1721.8	14.5 W	80	3.75
symmetric, wide beam [W] 	145-0117	LED-6/12W / 700 mA - 3000 K	1347.1	14.5 W	80	3.75
	145-0118	LED-6/12W / 700 mA - 4000 K	1440	14.5 W	80	3.75

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030


customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 08/14/2025

Optical Accessories

Snoot

Description	Part ID	A	C1
Snoot ET	145-0030	2.36"	4.72"



FLC121 LED REMOTE



Floodlights


Linear spread lens

Description	Part ID	C1
IO-180-FLC121-LED	145-0050	3.19"



Softening Lens

Description	Part ID	C1
IO-360-FLC121-LED	145-0142	3.20



FLC121 LED REMOTE



Floodlights


Honeycomb louvre

Description	Part ID	C1
IW-FLC121-LED	145-0143	3.20



Wallwash lens


Description	Part ID	C1
IO-20-WW-FLC121-LED	145-0145	3.19"



Floodlights

Glare shield

Description	Part ID	A	C1
Glare shield ES	145-9192	4.02	4.69




Mounting Accessories

Threaded Nipple

Description	Part ID	Weight (lb)
3/4 inch Threaded Nipple	145-6903	0.24
1/2 inch Threaded Nipple	145-6902	0.2

Flat surface and Column fitter


Description	Part ID	D1	D2	M1	Weight (lb)
Column fitter FLC100	145-9536	≥ 3.0	2.75	0.23	0.44 lbs



FLC121 LED REMOTE


Floodlights

Description	Part ID	D1	D2	M1	Weight (lb)
Flat surface fitter FLC100	145-9535	3.93	3.34	0.25	0.44



Ground spike EF

Description	Part ID	A	H1	Weight (lb)
Ground spike EF1	310-9102	10.63	10.62	2.64




Tree Strap Mounting System

Description	Part ID	Weight (lb)
FLC100 Tree Strap Mount	146-6200	0.84

Short post EM

Description	Part ID	D1	D2	H1	M1	Weight (lb)
EM1-2/M16	146-6950	6.3	5.12	7.87	0.35	3

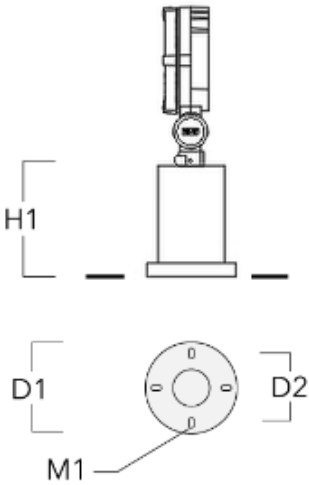

Electrical Accessories

REMOTE Driver

Description	Part ID	Additional information
FLC121 REMOTE Driver (1-2 Luminaires)	146-6900	
FLC121 REMOTE Driver (For 3-4 Luminaires)	146-6901	FLC121 IP67-Rated Driver