




Description

IP66, Class I. IK07. Marine-grade die-cast aluminium alloy. 5CE superior corrosion protection + primer including PCS hardware. Silicone CCG® Controlled Compression Gasket Safety glass lens. PMMA-LED lens array. Remote 240v gear to be ordered separately.

2700 K option available on request.

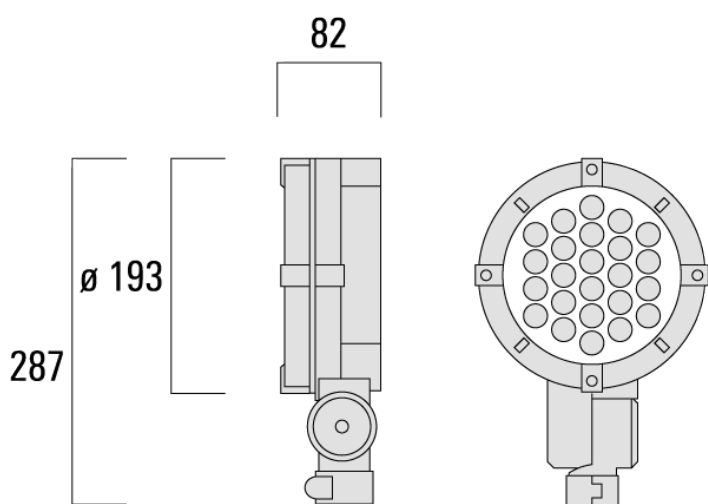

Projectors

Specifications
Material description

Body	Marine-grade die-cast aluminium alloy
Lens	Safety glass lens
Colours	<div><div></div> RAL9004 Signal black</div> <div><div></div> RAL9006 White aluminium</div> <div><div></div> RAL9007 Grey aluminium</div>
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware (unpainted)
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE+Primer

Electrical description

Additional information







Warranty	The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on www.we-ef.com for further details.
----------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Options

Light distribution







Colour temperature

Nominal Watt

	symmetric, wide beam [B]
	symmetric, medium beam [M]
	symmetric, very narrow beam [EE]
	symmetric, very narrow beam, sharp cut-off [EES]
	linear spread, very narrow beam [EE]
	linear spread, very narrow beam, sharp cut-off [EES]

	3000 K	42 W
	4000 K	0 W
	RGBW	

Configurations


Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
linear spread, very narrow beam [EE] 	146-0579+146-0439	LED-24/48W / 700 mA - 3000 K	5545.2	54 W	80	4.40
	146-0580+146-0439	LED-24/48W / 700 mA - 4000 K	5927.6	54 W	80	4.40
linear spread, very narrow beam, sharp cut-off [EES] 	146-0582+146-0439	LED-24/48W / 700 mA - 3000 K	6104.9	54 W	80	4.40
	146-0583+146-0439	LED-24/48W / 700 mA - 4000 K	6526	54 W	80	4.40
symmetric, medium beam [M] 	146-0576	LED-24/48W / 700 mA - 3000 K	6047.2	54 W	80	4.40
	146-0577	LED-24/48W / 700 mA - 4000 K	6464.2	54 W	80	4.40
	146-8576	LED-24/48W - RGBW	2963.9	54 W	20/80	4.40
symmetric, very narrow beam [EE] 	146-0579	LED-24/48W / 700 mA - 3000 K	5986.1	54 W	80	4.40
	146-0580	LED-24/48W / 700 mA - 4000 K	6398.9	54 W	80	4.40
	146-8575	LED-24/48W - RGBW	2921.6	54 W	20/80	4.40
symmetric, very narrow beam, sharp cut-off [EES] 	146-0582	LED-24/48W / 700 mA - 3000 K	6442.7	54 W	80	4.40
	146-0583	LED-24/48W / 700 mA - 4000 K	6887	54 W	80	4.40
symmetric, wide beam [B] 	146-0573	LED-24/48W / 700 mA - 3000 K	5388.5	54 W	80	4.40
	146-0574	LED-24/48W / 700 mA - 4000 K	5760.1	54 W	80	4.40
	146-8574	LED-24/48W - RGBW	2666.8	54 W	20/80	4.40

Projectors

Optical Accessories


Glare shield

Description	Part ID	A	C1
Glare shield ES	146-0229	120	145



Snoot

Description	Part ID	A	C1
Snoot ET	146-0398	120	145



Mounting Accessories

Ground spike EF

Description	Part ID	H1	Weight (kg)
Ground spike EF1	310-9102	270	1.20

