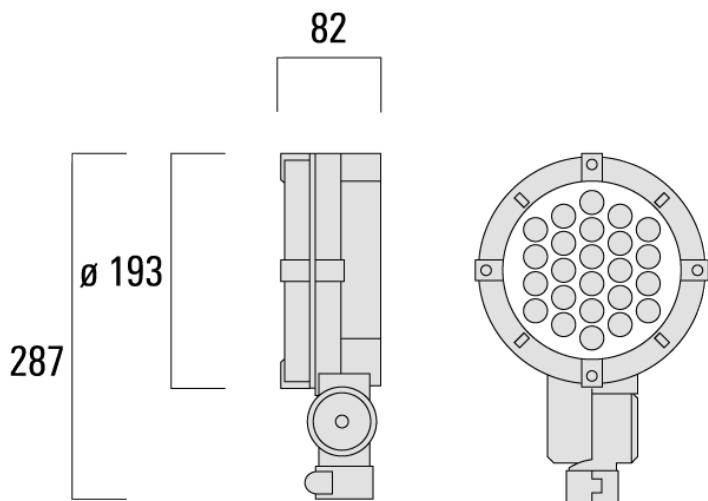


**Description**

IP66, Class I. IK07. Marine-grade die-cast aluminium alloy. 5CE superior corrosion protection + primer including PCS hardware. Silicone CCG® Controlled Compression Gasket Safety glass lens. PMMA-LED lens array. Remote 240v gear to be ordered separately.

2700 K option available on request.



**Projectors****Specifications****Material description**

---

Body	Marine-grade die-cast aluminium alloy
Lens	Safety glass lens
Colours	 RAL9004 Signal black  RAL9006 White aluminium  RAL9007 Grey aluminium
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware (unpainted)
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE+Primer


---

**Electrical description****Additional information**

---

Warranty	The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on <a href="http://www.we-ef.com">www.we-ef.com</a> for further details.
----------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------

---

**Options****Light distribution**

symmetric, wide beam [B]



symmetric, medium beam [M]



symmetric, very narrow beam [EE]



symmetric, very narrow beam, sharp cut-off [EES]



linear spread, very narrow beam [EE]



linear spread, very narrow beam, sharp cut-off [EES]

**Colour temperature**

3000 K

42 W

0 W









4000 K

RGBW

**Nominal Watt**


## Projectors

## Configurations


Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
linear spread, very narrow beam [EE]	146-0579+146-0439	LED-24/48W / 700 mA - 3000 K	5545.2	54 W	80	4.40
	146-0580+146-0439	LED-24/48W / 700 mA - 4000 K	5927.6	54 W	80	4.40
linear spread, very narrow beam, sharp cut-off [EES]	146-0582+146-0439	LED-24/48W / 700 mA - 3000 K	6104.9	54 W	80	4.40
	146-0583+146-0439	LED-24/48W / 700 mA - 4000 K	6526	54 W	80	4.40
symmetric, medium beam [M]	146-0576	LED-24/48W / 700 mA - 3000 K	6047.2	54 W	80	4.40
	146-0577	LED-24/48W / 700 mA - 4000 K	6464.2	54 W	80	4.40
	146-8576	LED-24/48W - RGBW	2963.9	54 W	20/80	4.40
symmetric, very narrow beam [EE]	146-0579	LED-24/48W / 700 mA - 3000 K	5986.1	54 W	80	4.40
	146-0580	LED-24/48W / 700 mA - 4000 K	6398.9	54 W	80	4.40
	146-8575	LED-24/48W - RGBW	2921.6	54 W	20/80	4.40
symmetric, very narrow beam, sharp cut-off [EES]	146-0582	LED-24/48W / 700 mA - 3000 K	6442.7	54 W	80	4.40
	146-0583	LED-24/48W / 700 mA - 4000 K	6887	54 W	80	4.40
symmetric, wide beam [B]	146-0573	LED-24/48W / 700 mA - 3000 K	5388.5	54 W	80	4.40
	146-0574	LED-24/48W / 700 mA - 4000 K	5760.1	54 W	80	4.40
	146-8574	LED-24/48W - RGBW	2666.8	54 W	20/80	4.40

**Projectors****Optical Accessories****Glare shield**

Description	Part ID	A	C1
Glare shield ES	146-0229	120	145

**Snoot**

Description	Part ID	A	C1
Snoot ET	146-0398	120	145



**Mounting Accessories****Ground spike EF**

Description	Part ID	H1	Weight (kg)
Ground spike EF1	310-9102	270	1.20

