**Description**

IP66, Class I. IK10. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection + primer including PCS hardware. Silicone rubber gasket. Safety glass lens. Two cable entries. Factory installed LED circuit board. Integral EC electronic converter.

A pre-installation blockout is available and recommended for mounting in concrete walls. To be ordered separately.

**Wall luminaires recessed****Specifications****Material description**

Body	Marine-grade die-cast aluminium alloy
Lens	Safety glass lens
Colours	 RAL9004 Signal black  RAL9006 White aluminium  RAL9007 Grey aluminium
Gasket	Silicone rubber gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware (unpainted)
Ingress protection	IP66
Impact resistance	IK10
Corrosion resistance	5CE+Primer

**Electrical description**


Power supply	230V / 50 Hz
Driver / Ballast	Integral EC electronic converter

**Additional information**

Lifetime	T <sub>a</sub> =40° L80B10 > 54000h
Warranty	The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on <a href="http://www.we-ef.com">www.we-ef.com</a> for further details.

**Options****Light distribution**

asymmetric, forward-throw [A60]


**Colour temperature****Nominal Watt**

3000 K

0 W

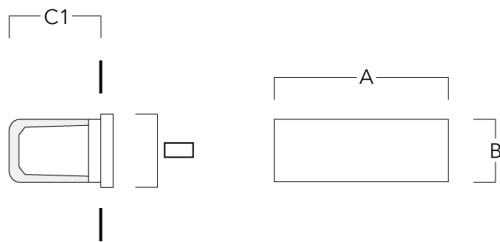
4000 K

**Wall luminaires recessed****Configurations**

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
asymmetric, forward-throw [A60]	133-0404	LED-18/9W / 500 mA - 4000 K	383.6	11 W	80	1.20
	133-0405	LED-18/9W / 500 mA - 3000 K	360.7	11 W	80	1.20

**Wall luminaires recessed****Mounting Accessories****Installation breakout**

Description	Part ID	A	B	C1	C
Installation breakout BST25-I	133-0076	267	132	130	130



Installation breakout BST25-II	133-0078	267	132	140	140
--------------------------------	----------	-----	-----	-----	-----

