




Description

IP66, Class I. Class II on request. IK10. Marine-grade, diecast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone rubber gasket. Safety glass lens. Two cable entries. Factory installed LED circuit board. Integral EC electronic converter.

A pre-installation blockout is available and recommended for mounting in concrete walls. To be ordered separately.

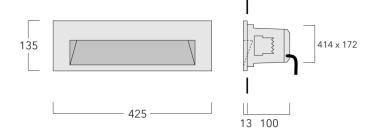



Specifications Material description

Body Marine-grade die-cast aluminium alloy

Lens Safety glass lens

Colours RAL9004 Signal black

RAL9006 White aluminium
RAL9007 Grey aluminium
RAL7016 Anthracite grey

RAL9016 Traffic white

Gasket Silicone rubber gasket

Fasteners PCS Polymer Coated Stainless Steel Hardware

Ingress protection IP66
Impact resistance IK10
Corrosion resistance 5CE

Electrical description

Power supply 220-240V / 50-60 Hz

Driver / Ballast Integral EC electronic converter

Surge protection 1/2 kV

Additional information

Lifetime Ta=25° L80B10 > 54000h

Energy efficiency class C (Light source)



Options Light distribution



asymmetric, forward-throw [A60]

Colour temperature Nominal Watt

3000 K

0 W



Configurations


Light distribution	Part ID	Light source	Rated	Rated input	CRI	Weight (kg)
			lumens	power		
asymmetric, forward-throw [A60]	133-0402	LED-36/8W - 3000 K	355.9	10 W	80	3.00
	133-0403	LED-36/8W - 4000 K	384.8	10 W	75	3.00



Mounting Accessories

Installation blockout

Description	Part ID	Α	В	C1	С
Installation blockout BST27-I	133-0217	447	157	125	130

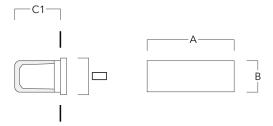

Installation blockout BST27-II 133-0219 447 157 135 140

