




Description

IP66, Class I. IK10. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection + primer including PCS hardware. Silicone rubber gasket. Safety glass lens. Two cable entries. Factory installed LED circuit board. Integral EC electronic converter.

A pre-installation blockout is available and recommended for mounting in concrete walls. To be ordered separately.

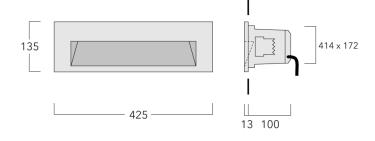



Specifications Material description

Body Marine-grade die-cast aluminium alloy

Lens Safety glass lens

Colours RAL9004 Signal black

RAL9006 White aluminium
RAL9007 Grey aluminium

Gasket Silicone rubber gasket

Fasteners PCS Polymer Coated Stainless Steel Hardware (unpainted)

Ingress protection IP66
Impact resistance IK10

Corrosion resistance 5CE+Primer

Electrical description

Power supply 230V / 50 Hz

Driver / Ballast Integral EC electronic converter

Additional information

Lifetime $Ta=40^{\circ} L80B10 > 54000h$

Warranty The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement

located on www.we-ef.com for further details.




Options Light distribution



asymmetric, forward-throw [A60]

Colour temperature N



Nominal Watt

0 W



Configurations


Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
asymmetric, forward-throw [A60]	133-0402	LED-36/8W - 3000 K	355.9	10 W	80	3.00
	133-0403	LED-36/8W - 4000 K	384.8	10 W	75	3.00



Mounting Accessories

Installation blockout

Description	Part ID	Α	В	C1	С
Installation blockout BST27-I	133-0217	447	157	125	130



Installation blockout BST27-II

133-0219

447 157 135 140

