


#### Description

IP66, Class I. IK10. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection + primer including PCS hardware. Silicone rubber gasket. Safety glass lens. Two cable entries. Factory installed LED circuit board. Integral EC electronic converter.

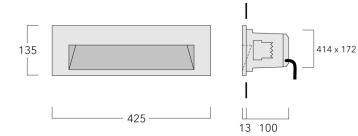

A pre-installation blockout is available and recommended for mounting in concrete walls. To be ordered separately.

### Wall luminaires recessed

Specifications	
<b>Material description</b>	I

Body	Marine-grade die-cast aluminium alloy				
Lens	Safety glass lens				
Colours	RAL9004 Signal black RAL9006 White aluminium RAL9007 Grey aluminium				
Gasket	Silicone rubber gasket				
Fasteners	PCS Polymer Coated Stainless Steel Hardware (unpainted)				
Ingress protection	IP66				
Impact resistance	IK10				
Corrosion resistance	5CE+Primer				

#### **Electrical description**

Power supply	230V / 50 Hz
Driver / Ballast	Integral EC electronic converter

## **Additional information**


Lifetime	Ta=40° L80B10 > 54000h
Warranty	The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on www.we-ef.com for further details.

## 511279 LED



Wall luminaires recessed

## **Options** Light distribution

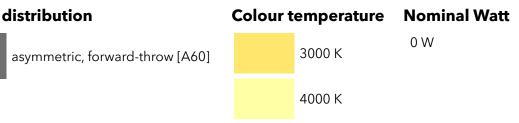

# we-ef

#### Wall luminaires recessed

# Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
asymmetric, forward-throw [A60]	133-0402	LED-36/8W - 3000 K	355.9	10 W	80	3.00
	133-0403	LED-36/8W - 4000 K	384.8	10 W	75	3.00

Wall luminaires recessed

## **Mounting Accessories**

### Installation blockout

