

# STI279 LED


## Wall luminaires recessed



### Description



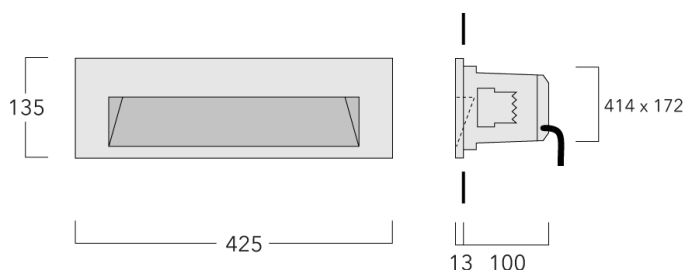


IP66, Class I. Class II on request. IK10. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone rubber gasket. Safety glass lens. Two cable entries. Factory installed LED circuit board. Integral EC electronic converter.

A pre-installation blackout is available and recommended for mounting in concrete walls. To be ordered separately.



**Wall luminaires recessed****Specifications****Material description**

---

Body	Marine-grade die-cast aluminium alloy
Lens	Safety glass lens
Colours	 RAL9004 Signal black  RAL9006 White aluminium  RAL9007 Grey aluminium  RAL7016 Anthracite grey  RAL9016 Traffic white
Gasket	Silicone rubber gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP66
Impact resistance	IK10
Corrosion resistance	5CE

---

**Electrical description**

---

Power supply	220-240V / 50-60 Hz
Driver / Ballast	Integral EC electronic converter
Surge protection	1/2 kV

---

**Additional information**

---

Lifetime	Ta=25° L80B10 > 54000h
Energy efficiency class	C (Light source)

---

# STI279 LED

Wall luminaires recessed

## Options

### Light distribution



asymmetric, forward-throw [A60]

### Colour temperature



3000 K



4000 K


### Nominal Watt

0 W

# STI279 LED


Wall luminaires recessed

## Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
asymmetric, forward-throw [A60] 	133-0402	LED-36/8W - 3000 K	355.9	10 W	80	3.00
	133-0403	LED-36/8W - 4000 K	384.8	10 W	75	3.00

**Mounting Accessories****Installation blackout**

Description	Part ID	A	B	C1	C
Installation blackout BST27-I	133-0217	447	157	125	130

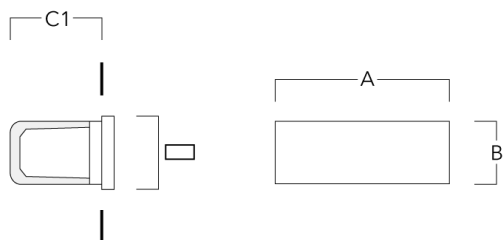

Installation blackout BST27-II	133-0219	447	157	135	140
--------------------------------	----------	-----	-----	-----	-----

