# we-ef


#### Wall luminaires recessed



#### **Description**

IP66, Class I. Class II on request. IK10. Marine-grade, diecast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone rubber gasket. Safety glass lens. Two cable entries. Factory installed LED circuit board. Integral EC electronic converter.

A pre-installation blockout is available and recommended for mounting in concrete walls. To be ordered separately.

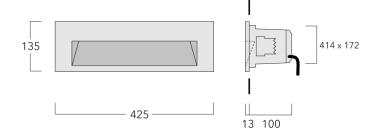



#### Wall luminaires recessed

# **Specifications**

## **Material description**

Body Marine-grade die-cast aluminium alloy

Lens Safety glass lens

Colours RAL9004 Signal black

RAL9006 White aluminium
RAL9007 Grey aluminium
RAL7016 Anthracite grey

RAL9016 Traffic white

Gasket Silicone rubber gasket

Fasteners PCS Polymer Coated Stainless Steel Hardware

Ingress protection IP66
Impact resistance IK10
Corrosion resistance 5CE

#### **Electrical description**

Power supply 220-240V / 50-60 Hz

Driver / Ballast Integral EC electronic converter

Surge protection 1/2 kV

#### Additional information

Lifetime  $Ta=25^{\circ} L80B10 > 54000h$ 

Energy efficiency class C (Light source)



#### Wall luminaires recessed

# Options Light distribution



asymmetric, forward-throw [A60]

# **Colour temperature** Nominal Watt

3000 K

0 K

4000 K

Fagerhult Lighting Ltd



### Wall luminaires recessed

# **Configurations**

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
asymmetric, forward-throw [A60]	133-0402	LED-36/8W - 3000 K	355.9	10 W	80	3.00
	133-0403	LED-36/8W - 4000 K	384.8	10 W	75	3.00




#### Wall luminaires recessed

# **Mounting Accessories**

## **Installation blockout**

Description	Part ID	Α	В	C1	2		
Installation blockout BST27-I	133-0217	447	157	125	130		



Installation blockout BST27-II 133-0219 447 157 135 140

