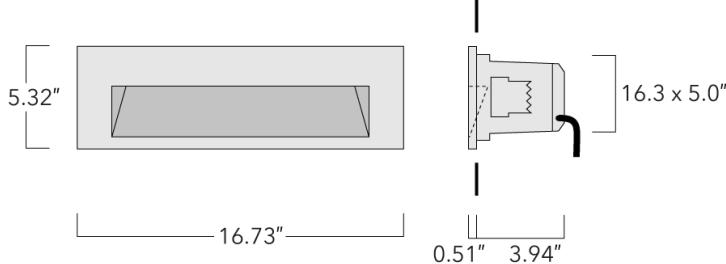


Recessed Wall Luminaires

**Description**

Downward aimed shielded light source.

ADA (American Disabilities Act) Compliant.

IP66. Class I. IK10. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Two cable entries. Integral driver. Factory-installed LED circuit board. 0-10V Dimming standard.

A pre-installation blockout is available and recommended for mounting in concrete walls; to be ordered separately.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)
+ XXX-XXXX (Accessory 1)

Recessed Wall Luminaires

Specifications

Material description

Body Marine-grade die-cast aluminium alloy

Lens Safety glass lens

Colors  RAL9004 Black

 RAL9007 Grey Metallic

 RAL9016 White

 RAL8019 Dark Bronze

Gasket Silicone rubber gasket

Fasteners PCS Polymer Coated Stainless Steel Hardware

Ingress protection IP66

Impact resistance IK10

Corrosion resistance 5CE

Electrical description

Power supply Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.

Driver / Ballast Integral EC electronic converter


Additional information

Lifetime $T_a=25^\circ/40^\circ$ L80B10 > 54000h

Listings ETL Listed. Suitable for wet locations.

Recessed Wall Luminaires**Options****Light distribution**

asymmetric, forward-throw [A60]

Color temperature

3000 K

4000 K


Nominal Watt

0 W

Recessed Wall Luminaires

Configurations

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI	Weight (lb)
asymmetric, forward-throw [A60]	133-0402	LED-36/8W - 3000 K	355.9	10 W	80	6.60
	133-0403	LED-36/8W - 4000 K	384.8	10 W	75	6.60



Recessed Wall Luminaires

Mounting Accessories

Installation breakout

Description	Part ID	A	B	C1	C
Installation breakout BST27-I	133-0217	17.60	6.18	5.20	130

