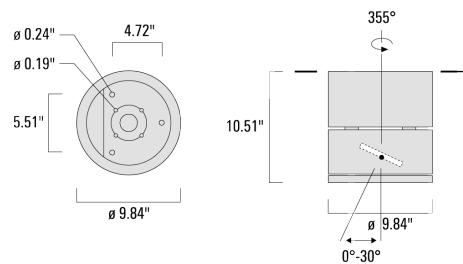


**Ceiling Luminaires****Description**

IP65. Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens, hinged. CAD-optimized optics for superior illumination and glare control. Integral driver in thermally separated compartment. OLC® One LED Concept. Factory-installed LED circuit board. 0-10V Dimming comes standard with luminaire. Frame with safety catch. Gimbal mounted, 0-30° tiltable and 355° rotatable.

Suitable for installation over recessed junction box. A maximum of one internal optical accessory.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)  
+ XXX-XXXX (Accessory 1)

**Ceiling Luminaires****Specifications****Material description**

Body                   Marine-grade die-cast aluminium alloy

Lens                   Safety glass lens, hinged

Colors

 RAL9004 Black
 RAL9007 Grey Metallic
 RAL9016 White
 RAL8019 Dark Bronze

Gasket               Silicone rubber gasket

Fasteners             PCS Polymer Coated Stainless Steel Hardware

Ingress protection   IP65

Impact resistance   IK07

Corrosion resistance 5CE

**Electrical description**

Power supply        Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.

Driver / Ballast     Integral EC electronic converter in thermally-separated compartment

**Additional information**

Lifetime             Ta=25°/40° L90B10 > 90000h

Listings             ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations.

**Ceiling Luminaires****Options****Light distribution**

symmetric, wide beam [W]



symmetric, medium beam [M]




symmetric, very narrow beam [VN]



symmetric, very narrow beam, 'sharp cut-off' [VNS]



wallwash [A20]



linear spread, medium beam [M]

**Color temperature**

3000 K








4000 K

**Nominal Watt**

21 W


**Ceiling Luminaires****Configurations**

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI	Weight (lb)
linear spread, medium beam [M] 	134-1598+185-2632	LED-12/18W / 500 mA - 3000 K	2041.9	21 W	80	18.70
	134-1599+185-2632	LED-12/18W / 500 mA - 4000 K	2184.3	21 W	80	18.70
symmetric, medium beam [M] 	134-1598	LED-12/18W / 500 mA - 3000 K	2241.6	21 W	80	18.70
	134-1599	LED-12/18W / 500 mA - 4000 K	2398	21 W	80	18.70
symmetric, very narrow beam [VN] 	134-1602	LED-12/18W / 500 mA - 3000 K	2137.9	21 W	80	18.70
	134-1603	LED-12/18W / 500 mA - 4000 K	2287	21 W	80	18.70
symmetric, very narrow beam, 'sharp cut-off' [VNS] 	134-1605	LED-12/18W / 500 mA - 3000 K	2388.2	21 W	80	18.70
	134-1606	LED-12/18W / 500 mA - 4000 K	2554.9	21 W	80	18.70
symmetric, wide beam [W] 	134-1596	LED-12/18W / 500 mA - 3000 K	1997.5	21 W	80	18.70
	134-1597	LED-12/18W / 500 mA - 4000 K	2136.8	21 W	80	18.70
wallwash [A20] 	134-1600	LED-12/18W / 500 mA - 3000 K	1798.6	21 W	80	18.70
	134-1601	LED-12/18W / 500 mA - 4000 K	1924	21 W	80	18.70

**Ceiling Luminaires****Optical Accessories****Softening Lens**


---

Description	Part ID	C1
IO-360-DAC/DOC240-GB-LED	134-1442	3.94



**Ceiling Luminaires****Honeycomb louvre**


Description	Part ID	C1
IW-DAC/DOC240-GB LED	134-1449	3.94



C1

**Linear spread lens**

Description	Part ID	C1
IO-180-DAC/DOC240-GB LED	185-2632	3.94



C1