**Description**

IP66. IK10. Marine-grade, all-aluminium construction. 5CE superior corrosion protection + primer including PCS hardware. Polycarbonate lens. Silicone CCG\_R Controlled Compression Gasket. Luminaire is factory-sealed and does not need to be opened during installation.

Integral EC electronic converter in thermally-separated compartment. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control.

**Bollards and pathway luminaires****Specifications****Material description**

Body	Marine-grade, all-aluminium construction
Lens	Polycarbonate lens
Colours	 RAL9004 Signal black  RAL9006 White aluminium  RAL9007 Grey aluminium
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware (unpainted)
Ingress protection	IP66
Impact resistance	IK10
Corrosion resistance	5CE+Primer

**Electrical description**

Power supply	230V / 50 Hz
Driver / Ballast	Integral EC electronic converter
Surge protection	10/10kV (SP10) available on request

**Additional information**

Lifetime	Ta=40° L70B50 > 50000h
Warranty	The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on <a href="http://www.we-ef.com">www.we-ef.com</a> for further details.

**Options****Light distribution**

symmetric distribution [C60]

**Colour temperature**

3000 K

4000 K

2700 K

**Nominal Watt**

2 W

15 W

**Bollards and pathway luminaires****Configurations**

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
symmetric distribution [C60] 	117-0201	LED-FT-17W / 500 mA - 3000 K	1136.2	20 W	80	7.80
	117-0202	LED-FT-17W / 500 mA - 4000 K	1184.3	20 W	80	7.80
	117-0223	LED-FT-12W / 350 mA - 3000 K	758.7	14 W	80	7.80
	117-0224	LED-FT-12W / 350 mA - 4000 K	799.4	14 W	80	7.80
	117-0320	LED-FT-12W / 350 mA - 2700 K	710.6	14 W	80	7.80
	117-0321	LED-FT-17W / 500 mA - 2700 K	1086.2	20 W	80	7.80

**Control****1-10 V analogue dimming interface**

Description	Part ID	C
1-10 V analogue dimming interface	430-0011	90


**Bollards and pathway luminaires****DALI interface**

Description	Part ID	Additional information	C
DALI interface	430-0013	DALI variant. The luminaire is equipped with a DT6 Dali driver (Dali 2.0).  Dali 2.0 -Application controllers and Input devices defined -Single-masters and multi-masters allowed -Event priorities defined -Separate addressing & grouping from control gear	90


Note: Mixing Dali 1 and Dali 2.0 drivers can cause problems because the addressing and the command scope has changed!

**Eco Step Dim® Motion**

Description	Part ID
Eco Step Dim® Motion - Linked-Primary	430-0030

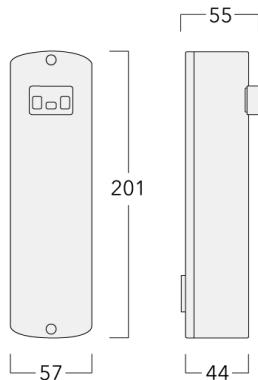


Eco Step Dim® Motion - Linked-Secondary	430-0031
---	----------

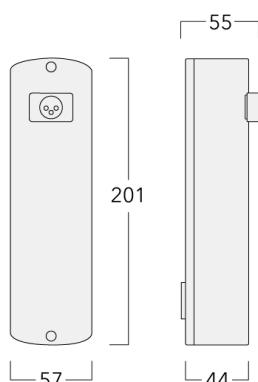


**Bollards and pathway luminaires**

Description	Part ID
Eco Step Dim® Motion - Stand-Alone	430-0037

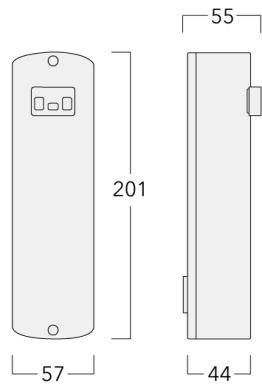

**Mounting Accessories****Planted root**

Description	Part ID	D1	D2	D3	D4	H1	H2	M1	T1	T2	Weight(kg)
Planted root ESV4	300-0461-AP	150	130	60	89	400	350	8	200	50 x 100	3.85

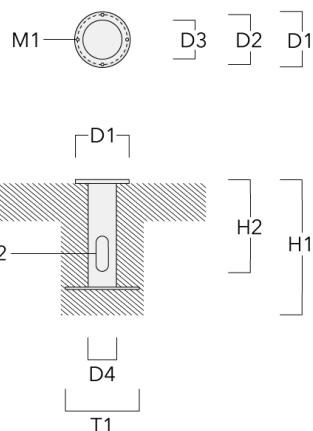

## Optical Accessories

### Light shield

Description	Part ID	H1	Weight (kg)
LS180 ZFY	117-0228	49	0.03

