


# CFY259 LED - 685 mm

## Bollards and pathway luminaires

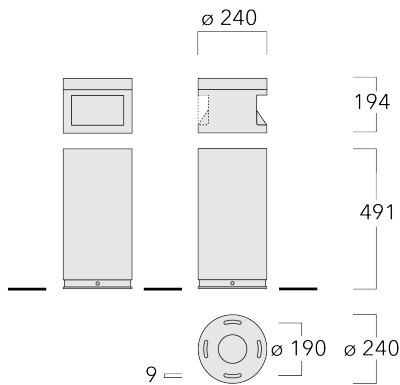

### Description

IP66, Class I. IK10. Marine-grade, all aluminium construction. 5CE superior corrosion protection + primer including PCS hardware. Silicone CCG® Controlled Compression Gasket. Diffused glass lens. Integral EC electronic converter in thermally-separated compartment. CAD-optimised indirect optics for superior illumination and glare control. Factory installed LED circuit board. Pre-wired post complete with cable connecting box and fuse for mains connection. Optional 2200 K version available. To be specified at time of ordering.




# CFY259 LED - 685 mm

## Bollards and pathway luminaires

### Specifications

#### Material description

---

Body	Marine-grade, all-aluminium construction
Lens	Diffused glass
Colours	 RAL9004 Signal black  RAL9006 White aluminium  RAL9007 Grey aluminium
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware (unpainted)
Ingress protection	IP66
Impact resistance	IK10
Corrosion resistance	5CE+Primer

---

#### Electrical description

---

Power supply	230V / 50 Hz
Driver / Ballast	Integral EC electronic converter
Surge protection	10/10kV (SP10) available on request

---

#### Additional information

---

Lifetime	Ta=40° L90B10 > 90000h
Warranty	The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on <a href="http://www.we-ef.com">www.we-ef.com</a> for further details.

---

# CFY259 LED - 685 mm

## Bollards and pathway luminaires

### Options

#### Light distribution



asymmetric, forward-throw, one-sided



asymmetric, forward-throw, two-sided

#### Colour temperature



3000 K



4000 K





2700 K

#### Nominal Watt

0 W

### Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
asymmetric, forward-throw, one-sided 	117-0211	LED-6/12W / 700 mA - 3000 K	368.3	14.5 W	80	15.00
	117-0212	LED-6/12W / 700 mA - 4000 K	393.7	14.5 W	80	15.00
	117-0213	LED-6/18W / 1050 mA - 3000 K	546.1	21 W	80	15.00
	117-0214	LED-6/18W / 1050 mA - 4000 K	571.5	21 W	80	15.00
	117-0328	LED-6/12W / 700 mA - 2700 K	342.9	14.5 W	80	15.00
	117-0329	LED-6/18W / 1050 mA - 2700 K	520.7	21 W	80	15.00
asymmetric, forward-throw, two-sided 	117-0273	LED-2x6/24W / 700 mA - 3000 K	736.6	27 W	80	15.00
	117-0274	LED-2x6/24W / 700 mA - 4000 K	787.4	27 W	80	15.00
	117-0275	LED-2x6/36W / 1050 mA - 3000 K	1092.3	41 W	80	15.00
	117-0276	LED-2x6/36W / 1050 mA - 4000 K	1143.1	41 W	80	15.00
	117-0330	LED-2x6/24W / 700 mA - 2700 K	685.8	27 W	80	15.00
	117-0331	LED-2x6/36W / 1050 mA - 2700 K	1041.5	41 W	80	15.00

# CFY259 LED - 685 mm

## Bollards and pathway luminaires


### Control

#### Eco Step Dim® Motion

---

Description	Part ID
Eco Step Dim® Motion - Linked-Primary	430-0030


---

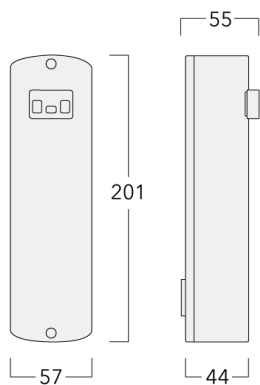

---

Eco Step Dim® Motion - Linked-Secondary	430-0031
---	----------

---

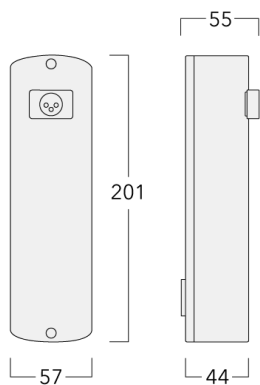

# CFY259 LED - 685 mm

## Bollards and pathway luminaires

---

Description	Part ID
Eco Step Dim® Motion - Stand-Alone	430-0037

---

