


CFY259 LED - 1085 mm

Bollards and pathway luminaires



Description

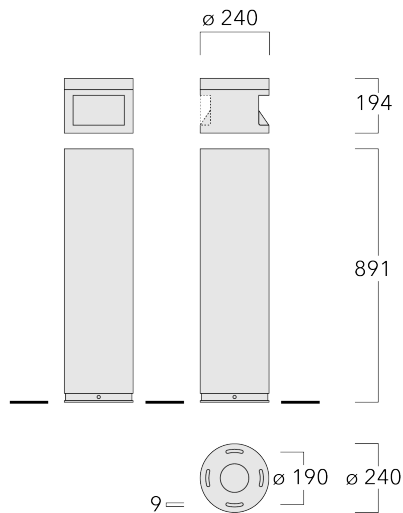


IP66, Class I. IK10. Marine-grade, all aluminium construction. 5CE superior corrosion protection + primer including PCS hardware. Silicone rubber gasket. Diffused glass lens. Integral EC electronic converter in thermally-separated compartment. Factory installed LED circuit board. CAD-optimised indirect optics for superior illumination and glare control. Pre-wired post complete with cable connecting box and fuse for mains connection.

CFY259 LED - 1085 mm

Bollards and pathway luminaires

Specifications

Material description

Body	Marine-grade, all-aluminium construction
Lens	Diffused glass
Colours	 RAL9004 Signal black  RAL9006 White aluminium  RAL9007 Grey aluminium
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware (unpainted)
Ingress protection	IP66
Impact resistance	IK10
Corrosion resistance	5CE+Primer

Electrical description

Power supply	230V / 50 Hz
Driver / Ballast	Integral EC electronic converter
Surge protection	10/10kV (SP10) available on request

Additional information

Lifetime	Ta=40° L90B10 > 90000h
Warranty	The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on www.we-ef.com for further details.

CFY259 LED - 1085 mm

Bollards and pathway luminaires

Options

Light distribution



asymmetric, forward-throw, one-sided



asymmetric, forward-throw, two-sided

Colour temperature



2700 K



4000 K



3000 K



Nominal Watt

0 W

CFY259 LED - 1085 mm

Bollards and pathway luminaires

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
 asymmetric, forward-throw, one-sided	117-0215	LED-6/18W / 1050 mA - 3000 K	546.1	21 W	80	18.00
	117-0216	LED-6/18W / 1050 mA - 4000 K	571.5	21 W	80	18.00
	117-0217	LED-6/12W / 700 mA - 3000 K	368.3	14.5 W	80	18.00
	117-0218	LED-6/12W / 700 mA - 4000 K	393.7	14.5 W	80	18.00
	117-0332	LED-6/12W / 700 mA - 2700 K	342.9	14.5 W	80	18.00
	117-0333	LED-6/18W / 1050 mA - 2700 K	520.7	21 W	80	18.00
 asymmetric, forward-throw, two-sided	117-0267	LED-2x6/24W / 700 mA - 3000 K	736.6	27 W	80	18.00
	117-0268	LED-2x6/24W / 700 mA - 4000 K	787.4	27 W	80	18.00
	117-0269	LED-2x6/36W / 1050 mA - 3000 K	1092.3	41 W	80	18.00
	117-0270	LED-2x6/36W / 1050 mA - 4000 K	1143.1	41 W	80	18.00
	117-0334	LED-2x6/24W / 700 mA - 2700 K	685.8	27 W	80	18.00
	117-0335	LED-2x6/36W / 1050 mA - 2700 K	1041.5	41 W	80	18.00


CFY259 LED - 1085 mm

Bollards and pathway luminaires


Control

Eco Step Dim® Motion

Description	Part ID
Eco Step Dim® Motion - Linked-Primary	430-0030

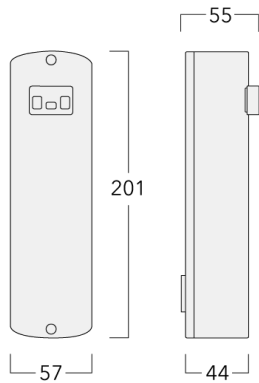


Eco Step Dim® Motion - Linked-Secondary	430-0031
---	----------

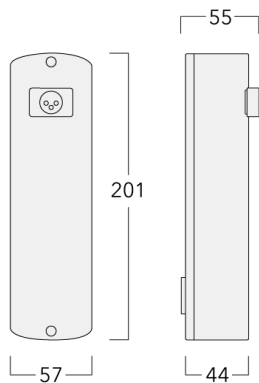

CFY259 LED - 1085 mm

Bollards and pathway luminaires

Description	Part ID
Eco Step Dim® Motion - Stand-Alone	430-0037

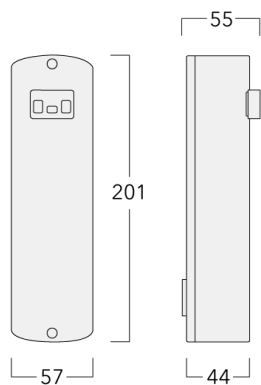

CFY259 LED - 1085 mm
Bollards and pathway luminaires

WE-EF LIGHTING Pty Ltd

6/13 Downard Street, 3195 Braeside, Victoria

Phone: +61 3 8587 0444

Fax: +61 3 8587 0499

info.australia@we-ef.com

<https://we-ef.com/aus>

Subject to technical changes and errors.

Generated on 23/10/2024