


CFY259 LED II

Bollards and Pathway Luminaires

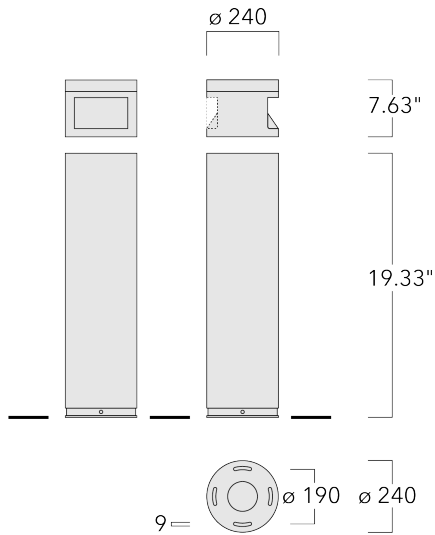

Description

IP66. Class I. IK10. Marine-grade, all aluminum construction. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Diffused safety glass lens. CAD-optimized indirect optics for superior illumination and glare control. Integral driver in thermally separated compartment. Factory-installed LED circuit board. 0-10V Dimming comes standard with luminaire.

Pre-wired post complete with cable connecting box and fuse for mains connection.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)
+ XXX-XXXX (Accessory 1)





WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 10/23/2024

Bollards and Pathway Luminaires**Specifications****Material description**

Body	Marine-grade, all-aluminium construction
Lens	Diffused glass
Colors	 RAL9004 Black  RAL9007 Grey Metallic  RAL9016 White  RAL8019 Dark Bronze
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP66
Impact resistance	IK10
Corrosion resistance	5CE

Electrical description

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Driver / Ballast	Integral EC electronic converter
Surge protection	Integral 10kV Surge Protector

Additional information

Lifetime	Ta=25°/40° L90B10 > 90000h
BUG Rating	Please see individual Spec Sheets for classification of Backlight, Uplight and Glare.
Listings	ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations.

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 10/23/2024

CFY259 LED II

Bollards and Pathway Luminaires



Options

Light distribution



asymmetric, forward-throw, one-sided



asymmetric, forward-throw, two-sided

Blank Head [BLANK]

Color temperature



2700 K



4000 K



3000 K

NA

Nominal Watt

0 W



WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 10/23/2024

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (lb)
Blank Head [BLANK]	117-6204	BLANK Head			NA	
asymmetric, forward-throw, one-sided 	117-0215	LED-6/18W / 1050 mA - 3000 K	546.1	21 W	80	39.68
	117-0216	LED-6/18W / 1050 mA - 4000 K	571.5	21 W	80	39.68
	117-0217	LED-6/12W / 700 mA - 3000 K	368.3	14.5 W	80	39.68
	117-0218	LED-6/12W / 700 mA - 4000 K	393.7	14.5 W	80	39.68
	117-0332	LED-6/12W / 700 mA - 2700 K	342.9	14.5 W	80	39.68
	117-0333	LED-6/18W / 1050 mA - 2700 K	520.7	21 W	80	39.68
asymmetric, forward-throw, two-sided 	117-0267	LED-2x6/24W / 700 mA - 3000 K	736.6	27 W	80	39.68
	117-0268	LED-2x6/24W / 700 mA - 4000 K	787.4	27 W	80	39.68
	117-0269	LED-2x6/36W / 1050 mA - 3000 K	1092.3	41 W	80	39.68
	117-0270	LED-2x6/36W / 1050 mA - 4000 K	1143.1	41 W	80	39.68
	117-0334	LED-2x6/24W / 700 mA - 2700 K	685.8	27 W		39.68
	117-0335	LED-2x6/36W / 1050 mA - 2700 K	1041.5	41 W	80	39.68

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030


customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 10/23/2024

Mounting Accessories

Planted root

Description	Part ID	D1	D2	D3	D4	H1	H2	M1	M2	Weight (lb)
Planted root ESV4	300-0464	8.66	7.48	4.25	4.02	15.75	13.78	.35	.24	9.48

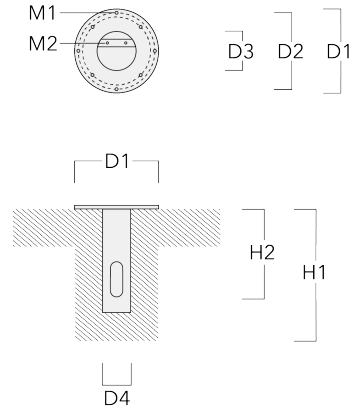

CFY259 LED II
Bollards and Pathway Luminaires

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086
Phone: +1 724 742 0030

customersupport.usa@we-ef.com
<https://we-ef.com/us>

Subject to technical changes and errors.
Generated on 10/23/2024