


LTP444 LED-FT

Light Columns





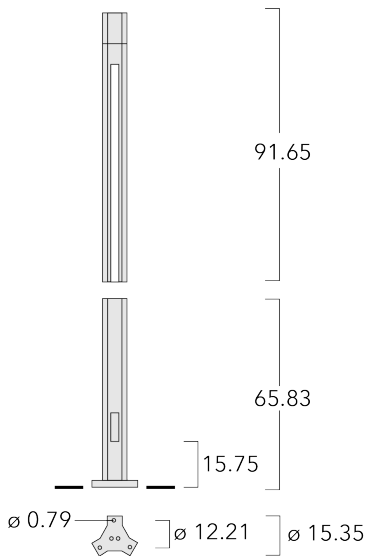

Description

IP44, Class I. IK10. Marine-grade aluminium construction. 5CE superior corrosion protection including PCS hardware. Silicone rubber gaskets. Prismatic polycarbonate lenses, 3 x 120° offset.

Service door with fused cable connecting box.

Specifications**Material description**

Body	Marine-grade, all-aluminium construction
Colors	 RAL9004 Black
	 RAL9007 Grey Metallic
	 RAL9016 White
	 RAL8019 Dark Bronze
Gasket	Silicone rubber gasket
Fasteners	PCS Polymer Coated Stainless Steel hardware
Ingress protection	IP44
Impact resistance	IK10
Corrosion resistance	5CE

Electrical description

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Driver / Ballast	Integral EC electronic converter
Power factor	> 0.9

Additional information

Lifetime	Ta=25°/40° L70B50 > 50000h
BUG Rating	Please see individual Spec Sheets for classification of Backlight, Uplight and Glare.
Listings	ETL listed. Suitable for wet locations.

LTP444 LED-FT

Light Columns



Options

Light distribution



three sided light output

Color temperature



3000 K



4000 K

Nominal Watt

0 W

WE-EF LIGHTING USA, LLC


410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030
customersupport.usa@we-ef.com - <https://we-ef.com/us>
Subject to technical changes and errors. - Generated on 07/24/2025

LTP444 LED-FT

Light Columns



Configurations

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI	Weight (lb)
three sided light output 	116-0205	LED-FT-37W (4000K)	2656.2	42 W	80	72.00
	116-0207	LED-FT-37W (3000K)	2546.5	42 W	80	72.00

Mounting Accessories

Planted root

Description	Part ID	D1	D2	D3	D4	H1	H2	M1	Weight (lb)
Planted root ESD6	300-0456	13.78	12.2	4.29	5.24	22.83	19.69	.629	22.93

