


# LSP444 LED-FT

## Light Columns

**we-ef**

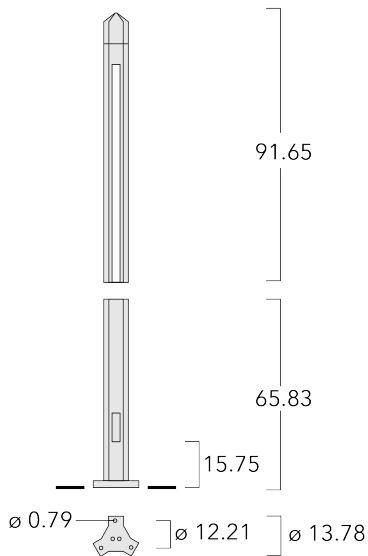

### Description

IP44. Class I. IK10. Marine-grade, all aluminum construction. Anodized aluminum reflector. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gaskets. Prismatic polycarbonate lenses. Service door with fused cable connecting box. Factory-installed LED circuit board.

3-Sided Light Distribution [3 x 120° offset].

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)  
+ XXX-XXXX (Accessory 1)

### WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>





Subject to technical changes and errors. - Generated on 10/23/2024

**Light Columns****Specifications****Material description**

---

Body Marine-grade, all-aluminium construction

Colors

	RAL9004 Black
	RAL9007 Grey Metallic
	RAL9016 White
	RAL8019 Dark Bronze

Gasket Silicone rubber gasket

Ingress protection IP44

Impact resistance IK10

Corrosion resistance 5CE

---

**Electrical description**

---

Power supply Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.

Driver / Ballast Integral EC electronic converter

Power factor > 0.9

Surge protection In-line bracket 10kV Surge Protector

---

**Additional information**

---

Lifetime Ta=25°/40° L70B50 > 50000h

BUG Rating Please see individual Spec Sheets for classification of Backlight, Uplight and Glare.

Listings ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations.

---

# LSP444 LED-FT

## Light Columns

### Options

#### Light distribution



three sided light output

#### Color temperature



3000 K



4000 K

#### Nominal Watt

0 W

#### WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>


Subject to technical changes and errors. - Generated on 10/23/2024

# LSP444 LED-FT

## Light Columns



### Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (lb)
three sided light output	116-0208	LED-FT-37W (3000K)	2546.5	42 W	80	72.00
	116-0209	LED-FT-37W (4000K)	2656.2	42 W	80	72.00

#### WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 10/23/2024

**LSP444 LED-FT**

**Light Columns**

**WE-EF LIGHTING USA, LLC**

410-D Keystone Drive, 15086 Warrendale, PA 15086

Phone: +1 724 742 0030

[customersupport.usa@we-ef.com](mailto:customersupport.usa@we-ef.com)

<https://we-ef.com/us>

Subject to technical changes and errors.

Generated on 10/23/2024