


DOC110 LED [For Remodel]

Ceiling Luminaires

we-ef

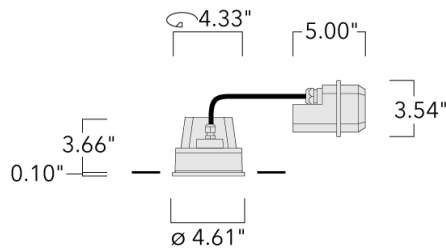

Description

DOC110 LED for remodel projects. For new construction, see DOC110 LED [New Construction] version.

IP66, Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Separate IP66 driver housing. CAD-optimized optics for superior illumination and glare control. OLC® One LED Concept. Factory installed LED circuit board. 0-10V Dimming comes standard with luminaire.

A pre-installation blockout, proud or flush, is available and recommended for mounting in concrete ceilings; to be ordered separately.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX - 9004 (Black)

+ XXX-XXXX (Accessory 1)

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>





Subject to technical changes and errors. - Generated on 11/23/2024

DOC110 LED [For Remodel]

Ceiling Luminaires

Specifications

Material description

Body	Marine-grade, die-cast aluminium alloy
Lens	Safety glass lens
Colors	 RAL9004 Black  RAL9007 Grey Metallic  RAL9016 White  RAL8019 Dark Bronze
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE

Electrical description

Power supply	Integral 120-277V/0-10V dimming driver
Driver / Ballast	Integral EC electronic converter in thermally-separated compartment

Additional information

Lifetime	Ta=25°/40° L90B10 > 90000h
Listings	ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations.

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030
customersupport.usa@we-ef.com - <https://we-ef.com/us>
Subject to technical changes and errors. - Generated on 11/23/2024

DOC110 LED [For Remodel]



Ceiling Luminaires

Options

Light distribution



symmetric, wide beam [W]



symmetric, medium beam [M]



symmetric, very narrow beam [VN]



symmetric, very narrow beam, 'sharp cut-off' [VNS]



wallwash [A20]



linear spread, very narrow beam



linear spread, very narrow beam, 'sharp cut-off'

Color temperature



3000 K



4000 K



2700 K

Nominal Watt

15 W

155 W

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 11/23/2024

Ceiling Luminaires

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (lb)
linear spread, very narrow beam, 'sharp cut-off'	134-1633+134-1637	LED-6/12W / 700 mA - 3000 K	1526.2	14.5 W	80	2.86
	134-1634+134-1637	LED-6/12W / 700 mA - 4000 K	1631.5	14.5 W	80	2.86
linear spread, very narrow beam	134-1631+134-1637	LED-6/12W / 700 mA - 3000 K	1386.3	14.5 W	80	2.86
	134-1632+134-1637	LED-6/12W / 700 mA - 4000 K	1481.9	14.5 W	80	2.86
symmetric, medium beam [M]	134-1627	LED-6/12W / 700 mA - 3000 K	1511.8	14.5 W	80	2.86
	134-1627	LED-6/12W / 700 mA - 3000 K	1511.8	14.5 W	80	2.86
	134-1628	LED-6/12W / 700 mA - 4000 K	1616.1	14.5 W	80	2.86
	134-1908	LED-6/12W / 700 mA - 2700 K	1407.5	14.5 W	80	2.86
symmetric, very narrow beam [VN]	134-1631	LED-6/12W / 700 mA - 3000 K	1496.5	14.5 W	80	2.86
	134-1632	LED-6/12W / 700 mA - 4000 K	1599.7	14.5 W	80	2.86
	134-1909	LED-6/12W / 700 mA - 2700 K	1393.3	14.5 W	80	2.86
symmetric, very narrow beam, 'sharp cut-off' [VNS]	134-1633	LED-6/12W / 700 mA - 3000 K	1610.7	14.5 W	80	2.86
	134-1634	LED-6/12W / 700 mA - 4000 K	1721.8	14.5 W	80	2.86
	134-1910	LED-6/12W / 700 mA - 2700 K	1499.6	14.5 W	80	2.86
symmetric, wide beam [W]	134-1625	LED-6/12W / 700 mA - 3000 K	1347.1	14.5 W	80	2.86
	134-1626	LED-6/12W / 700 mA - 4000 K	1440	14.5 W	80	2.86
	134-1907	LED-6/12W / 700 mA - 2700 K	1254.2	14.5 W	80	2.86
wallwash [A20]	134-1627+134-1683	LED-6/12W / 700 mA - 3000 K	1142.4	14.5 W	80	2.86
	134-1628+134-1683	LED-6/12W / 700 mA - 4000 K	1221.2	14.5 W	80	2.86
	134-1908+134-1683	LED-6/12W / 700 mA - 2700 K	1063.6	14.5 W	80	2.86

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030


customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 11/23/2024

DOC110 LED [For Remodel]



Ceiling Luminaires

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (lb)
						

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030
customersupport.usa@we-ef.com - <https://we-ef.com/us>
Subject to technical changes and errors. - Generated on 11/23/2024


DOC110 LED [For Remodel]

Ceiling Luminaires

Optical Accessories

Linear spread lens

Description	Part ID	C1
IO-180-DOC110-LED	134-1637	3.86



C1

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>


Subject to technical changes and errors. - Generated on 11/23/2024

DOC110 LED [For Remodel]

Ceiling Luminaires

Wallwash lens

Description	Part ID	C1
10-20-DOC110-LED	134-1683	3.85



C1

WE-EF LIGHTING USA, LLC


410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030
customersupport.usa@we-ef.com - <https://we-ef.com/us>
Subject to technical changes and errors. - Generated on 11/23/2024

Ceiling Luminaires

Mounting Accessories

Installation blackout

Description	Part ID	A	B	C1	D1
Installation blackout BDO11-I	134-1639	13.11	9.13	6.77	4.60

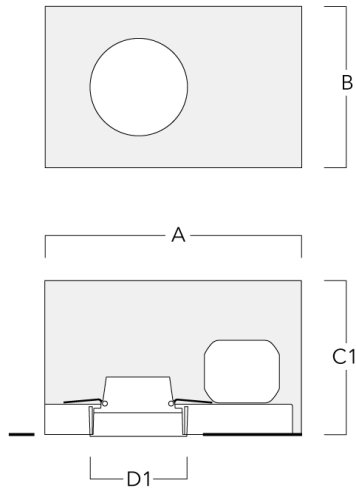

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030
customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 11/23/2024