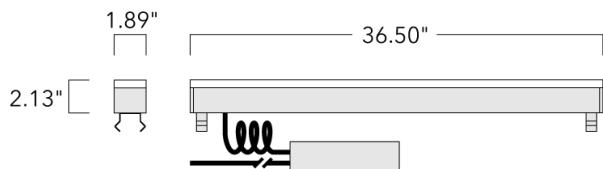


Inground Luminaires

**Description**

IP69K. Class I. IK08. Marine-grade, all aluminum construction. Anodized aluminum extrusion. PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens; max static load, 3.3 tons (6,600 lbs) (according to DIN EN 60598-2-13). Luminaire can be driven over at low speed, without accelerating or turning, by vehicles with air-filled tires, at a weight up to 5.5 tons (11,000 lbs) per wheel. Factory-sealed termination chamber complete with cable gland and 3 ft of flexible PVC-free, gel-impregnated anti-wicking cable. Linear PMMA LED lens. Integral driver in thermally separated compartment. Factory-installed LED circuit board. LED board can be easily removed for upgrading. 0-10V Dimming. Luminaire is factory-sealed and does not need to be opened during installation.

The installation blockout to be ordered separately; blockouts can house between 1-4 luminaires.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.
Example: XXX-XXXX-9004 (Black)
+ XXX-XXXX (Accessory 1)

Inground Luminaires**Specifications****Material description**

| | |
|--------------------|--|
| Body | Marine-grade all aluminium construction. Anodized aluminium extrusion. |
| Lens | Safety glass lens |
| Colors | |
| Gasket | Silicone CCG® Controlled Compression Gasket |
| Fasteners | PCS polymer coated stainless steel |
| Ingress protection | IP69K - HIGHEST PROTECTION RATING AVAILABLE |
| Impact resistance | IK08 |

Electrical description

| | |
|------------------|---|
| Power supply | Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order. |
| Driver / Ballast | Electronic converter with 0-10V interface |
| Power factor | > 0.9 |

Additional information

| | |
|----------|--|
| Lifetime | Ta=25°/40° L90B10 > 90000h |
| Listings | ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations. |

Inground Luminaires

Options

Light distribution

Color temperature

0 W

3000 K

4000 K

2700 K



symmetric linear, wide beam [LW]



symmetric linear, medium beam [LM]



symmetric linear, narrow beam [LN]



symmetric linear, very narrow beam [LVN]




asymmetric linear, wallwash [LA10]



symmetric linear, medium beam [LM/IW]







symmetric linear, wide beam [LW/IW]




symmetric linear, narrow beam [LN/IW]

Inground Luminaires

Configurations

| Light distribution | Part ID | Light source | Delivered lumens | Rated input power | CRI | Weight (lb) |
|--|----------|------------------------------|------------------|-------------------|-----|-------------|
| asymmetric linear, wallwash [LA10] | 186-0263 | LED-48/30W / 225 mA - 3000 K | 3074.8 | 33.5 W | 80 | 13.50 |
|  | 186-0264 | LED-48/30W / 225 mA - 4000 K | 3074.8 | 33.5 W | 80 | 13.50 |
| | 186-0444 | LED-48/30W / 225 mA - 2700 K | 3074.8 | 33.5 W | 80 | 13.50 |
| symmetric linear, medium beam [LM/IW] | 186-0396 | LED-48/30W / 225 mA - 3000 K | 1603.2 | 33.5 W | 80 | 13.50 |
|  | 186-0397 | LED-48/30W / 225 mA - 4000 K | 1603.2 | 33.5 W | 80 | 13.50 |
| | 186-0483 | LED-48/30W / 225 mA - 2700 K | 1603.2 | 33.5 W | 80 | 13.50 |
| symmetric linear, medium beam [LM] | 186-0254 | LED-48/30W / 225 mA - 3000 K | 3210.6 | 33.5 W | 80 | 13.50 |
|  | 186-0255 | LED-48/30W / 225 mA - 4000 K | 3210.6 | 33.5 W | 80 | 13.50 |
| | 186-0442 | LED-48/30W / 225 mA - 2700 K | 3210.6 | 33.5 W | 80 | 13.50 |
| symmetric linear, narrow beam [LN/IW] | 186-0398 | LED-48/30W / 225 mA - 3000 K | 1670.5 | 33.5 W | 80 | 13.50 |
|  | 186-0399 | LED-48/30W / 225 mA - 4000 K | 1670.5 | 33.5 W | 80 | 13.50 |
| | 186-0484 | LED-48/30W / 225 mA - 2700 K | 1670.5 | 33.5 W | 80 | 13.50 |
| symmetric linear, narrow beam [LN] | 186-0257 | LED-48/30W / 225 mA - 3000 K | 3151.9 | 33.5 W | 80 | 13.50 |
|  | 186-0258 | LED-48/30W / 225 mA - 4000 K | 3151.9 | 33.5 W | 80 | 13.50 |
| | 186-0420 | LED-48/30W / 225 mA - 2700 K | 3151.9 | 33.5 W | 80 | 13.50 |
| symmetric linear, very narrow beam [LVN] | 186-0260 | LED-48/30W / 225 mA - 3000 K | 3608.9 | 33.5 W | 80 | 13.50 |
|  | 186-0261 | LED-48/30W / 225 mA - 4000 K | 3608.9 | 33.5 W | 80 | 13.50 |
| | 186-0443 | LED-48/30W / 225 mA - 2700 K | 3608.9 | 33.5 W | 80 | 13.50 |
| symmetric linear, wide beam [LW/IW] | 186-0394 | LED-48/30W / 225 mA - 3000 K | 1277.3 | 33.5 W | 80 | 13.50 |
| | 186-0395 | LED-48/30W / 225 mA - 4000 K | 1277.3 | 33.5 W | 80 | 13.50 |

Inground Luminaires


| Light distribution | Part ID | Light source | Delivered lumens | Rated input power | CRI | Weight (lb) |
|--|----------|------------------------------|------------------|-------------------|-----|-------------|
|  | 186-0482 | LED-48/30W / 225 mA - 2700 K | 1277.3 | 33.5 W | 80 | 13.50 |
| symmetric linear, wide beam [LW] | 186-0251 | LED-48/30W / 225 mA - 3000 K | 2873.6 | 33.5 W | 80 | 13.50 |
| | 186-0252 | LED-48/30W / 225 mA - 4000 K | 2873.6 | 33.5 W | 80 | 13.50 |
| | 186-0441 | LED-48/30W / 225 mA - 2700 K | 2873.6 | 33.5 W | 80 | 13.50 |

Inground Luminaires

Electrical Accessories

Sealable junction box

| Description | Part ID | C1 | M1 | M2 |
|-------------------------------|----------|------|--------------------|---------------------------|
| Sealable junction box SJB 130 | 185-1624 | 5.75 | \varnothing 0.39 | \varnothing 0.47 - 0.75 |

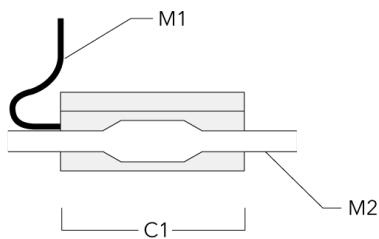


Inground Luminaires

Optical Accessories

Honeycomb louvre

| Description | Part ID | C1 | H1 |
|---------------|----------|-------|------|
| IW for ETV130 | 186-0295 | 35.35 | 1.18 |

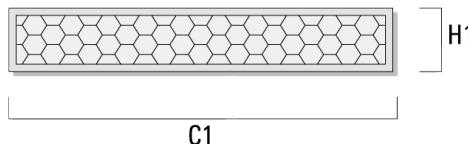


Inground Luminaires


Mounting Accessories

Installation breakout, Type I

| Description | Part ID | A | C1 | D1 | D2 | Weight (lb) |
|------------------------------|----------|--------|------|------|------|-------------|
| BEV130-I-1/927 (1 luminaire) | 186-0310 | 38.38" | 6.30 | 2.13 | 4.72 | 10.36 lbs |

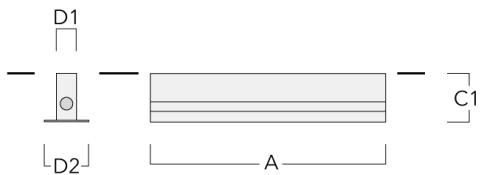


| | | | | | | |
|-------------------------------|----------|-------|------|------|------|-------|
| BEV130-I-2/927 (2 luminaires) | 186-0311 | 74.96 | 6.30 | 2.13 | 4.72 | 19.84 |
|-------------------------------|----------|-------|------|------|------|-------|

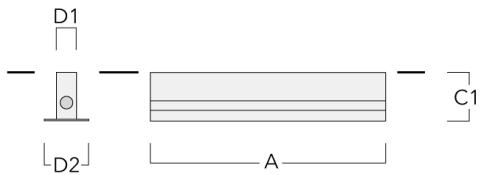

Inground Luminaires

| Description | Part ID | A | C1 | D1 | D2 | Weight (lb) |
|-------------------------------|----------|--------|------|------|------|-------------|
| BEV130-I-3/927 (3 luminaires) | 186-0312 | 111.54 | 6.30 | 2.13 | 4.72 | 29.10 lbs |

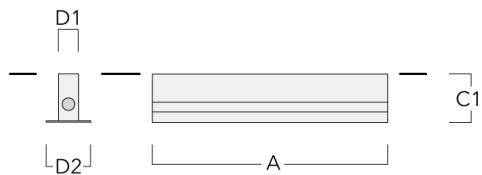

| | | | | | | |
|-------------------------------|----------|--------|------|------|------|-------|
| BEV130-I-4/927 (4 luminaires) | 186-0313 | 148.11 | 6.30 | 2.13 | 4.72 | 38.58 |
|-------------------------------|----------|--------|------|------|------|-------|

