

### Description

IP69K. Class I. IK08. Marine-grade, all aluminum construction. Anodized aluminum extrusion. PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens; max static load, 3.3 tons (6,600 lbs) (according to DIN EN 60598-2-13). Luminaire can be driven over at low speed, without accelerating or turning, by vehicles with air-filled tires, at a weight up to 5.5 tons (11,000 lbs) per wheel. Factory-sealed termination chamber complete with cable gland and 3 ft of flexible PVC-free, gel-impregnated anti-wicking cable. Linear PMMA LED lens. Integral driver in thermally separated compartment. Factory-installed LED circuit board. LED board can be easily removed for upgrading. 0-10V Dimming. Luminaire is factory-sealed and does not need to be opened during installation.

The installation blackout to be ordered separately; blockouts can house between 1-4 luminaires.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)  
+ XXX-XXXX (Accessory 1)

### WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 11/23/2024

# ETV130 LED

## Inground Luminaires

### Specifications

#### Material description

---

Body	Marine-grade all aluminium construction. Anodized aluminium extrusion.
Lens	Safety glass lens
Colors	
Gasket	Silicone CCG <sup>®</sup> Controlled Compression Gasket
Fasteners	PCS polymer coated stainless steel
Ingress protection	IP69K - HIGHEST PROTECTION RATING AVAILABLE
Impact resistance	IK08

---

#### Electrical description

---

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Driver / Ballast	Electronic converter with 0-10V interface
Power factor	> 0.9

---

#### Additional information

---

Lifetime	Ta=25°/40° L90B10 > 90000h
Listings	ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations.

---

#### WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 11/23/2024

# ETV130 LED

## Inground Luminaires



### Options

#### Light distribution

#### Color temperature

#### Nominal Watt



symmetric linear, wide beam [LW]



3000 K

0 W



symmetric linear, medium beam [LM]



4000 K



symmetric linear, narrow beam [LN]



2700 K



symmetric linear, very narrow beam [LVN]



asymmetric linear, wallwash [LA10]



symmetric linear, medium beam [LM/IW]



symmetric linear, wide beam [LW/IW]



symmetric linear, narrow beam [LN/IW]







#### WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 11/23/2024

**Configurations**

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (lb)
asymmetric linear, wallwash [LA10] 	186-0263	LED-48/30W / 225 mA - 3000 K	3074.8	33.5 W	80	13.50
	186-0264	LED-48/30W / 225 mA - 4000 K	3074.8	33.5 W	80	13.50
	186-0444	LED-48/30W / 225 mA - 2700 K	3074.8	33.5 W	80	13.50
symmetric linear, medium beam [LM/IW] 	186-0396	LED-48/30W / 225 mA - 3000 K	1603.2	33.5 W	80	13.50
	186-0397	LED-48/30W / 225 mA - 4000 K	1603.2	33.5 W	80	13.50
	186-0483	LED-48/30W / 225 mA - 2700 K	1603.2	33.5 W	80	13.50
symmetric linear, medium beam [LM] 	186-0254	LED-48/30W / 225 mA - 3000 K	3210.6	33.5 W	80	13.50
	186-0255	LED-48/30W / 225 mA - 4000 K	3210.6	33.5 W	80	13.50
	186-0442	LED-48/30W / 225 mA - 2700 K	3210.6	33.5 W	80	13.50
symmetric linear, narrow beam [LN/IW] 	186-0398	LED-48/30W / 225 mA - 3000 K	1670.5	33.5 W	80	13.50
	186-0399	LED-48/30W / 225 mA - 4000 K	1670.5	33.5 W	80	13.50
	186-0484	LED-48/30W / 225 mA - 2700 K	1670.5	33.5 W	80	13.50
symmetric linear, narrow beam [LN] 	186-0257	LED-48/30W / 225 mA - 3000 K	3151.9	33.5 W	80	13.50
	186-0258	LED-48/30W / 225 mA - 4000 K	3151.9	33.5 W	80	13.50
	186-0420	LED-48/30W / 225 mA - 2700 K	3151.9	33.5 W	80	13.50
symmetric linear, very narrow beam [LVN] 	186-0260	LED-48/30W / 225 mA - 3000 K	3608.9	33.5 W	80	13.50
	186-0261	LED-48/30W / 225 mA - 4000 K	3608.9	33.5 W	80	13.50
	186-0443	LED-48/30W / 225 mA - 2700 K	3608.9	33.5 W	80	13.50
symmetric linear, wide beam [LW/IW] 	186-0394	LED-48/30W / 225 mA - 3000 K	1277.3	33.5 W	80	13.50
	186-0395	LED-48/30W / 225 mA - 4000 K	1277.3	33.5 W	80	13.50

**WE-EF LIGHTING USA, LLC**


410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 11/23/2024

# ETV130 LED

## Inground Luminaires

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (lb)
	186-0482	LED-48/30W / 225 mA - 2700 K	1277.3	33.5 W	80	13.50
symmetric linear, wide beam [LW]	186-0251	LED-48/30W / 225 mA - 3000 K	2873.6	33.5 W	80	13.50
	186-0252	LED-48/30W / 225 mA - 4000 K	2873.6	33.5 W	80	13.50
	186-0441	LED-48/30W / 225 mA - 2700 K	2873.6	33.5 W	80	13.50

### WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 11/23/2024


**Electrical Accessories**

**Sealable junction box**

---

Description	Part ID	C1	M1	M2
Sealable junction box SJB 130	185-1624	5.75	Ø 0.39	Ø 0.47 - 0.75

---

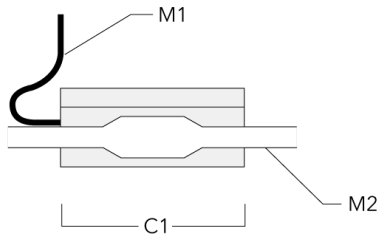

# ETV130 LED



## Inground Luminaires


### Optical Accessories

#### Honeycomb louvre

---

Description	Part ID	C1	H1
IW for ETV130	186-0295	35.35	1.18

---

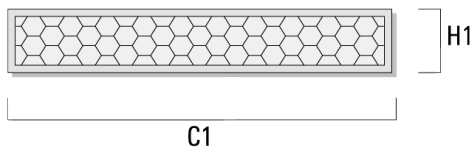

---

#### WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030  
customersupport.usa@we-ef.com - <https://we-ef.com/us>  
Subject to technical changes and errors. - Generated on 11/23/2024


**Mounting Accessories**

**Installation blockout, Type I**

---

Description	Part ID	A	C1	D1	D2	Weight (lb)
BEV130-I-1/927 (1 luminaire)	186-0310	38.38"	6.30	2.13	4.72	10.36 lbs


---

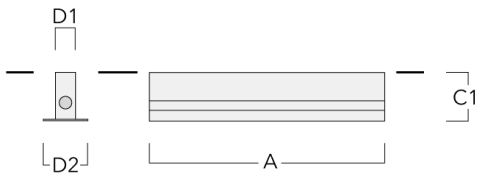

---

BEV130-I-2/927 (2 luminaires)	186-0311	74.96	6.30	2.13	4.72	19.84
-------------------------------	----------	-------	------	------	------	-------

---

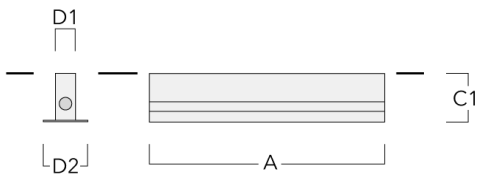





# ETV130 LED

## Inground Luminaires

Description	Part ID	A	C1	D1	D2	Weight (lb)
BEV130-I-3/927 (3 luminaires)	186-0312	111.54	6.30	2.13	4.72	29.10 lbs

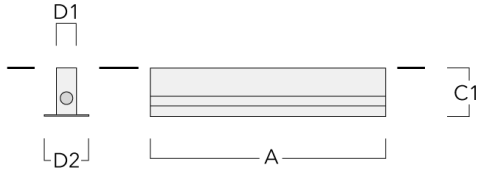

BEV130-I-4/927 (4 luminaires)	186-0313	148.11	6.30	2.13	4.72	38.58
-------------------------------	----------	--------	------	------	------	-------

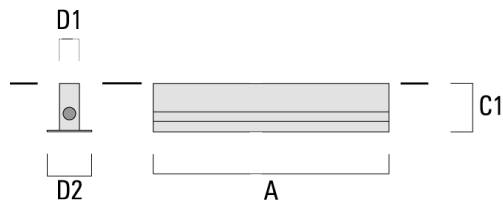

### WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030  
customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 11/23/2024