

### Description

IP69K. Class I. IK08. Marine-grade, all aluminum construction. Anodized aluminum extrusion. PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens; max static load, 3.3 tons (6,600 lbs) (according to DIN EN 60598-2-13). Luminaire can be driven over at low speed, without accelerating or turning, by vehicles with air-filled tires, at a weight up to 5.5 tons (11,000 lbs) per wheel. Factory-sealed termination chamber complete with cable gland and 3 ft of flexible PVC-free, gel-impregnated anti-wicking cable. Linear PMMA LED lens. Integral driver in thermally separated compartment. Factory-installed LED circuit board. LED board can be easily removed for upgrading. 0-10V Dimming. Luminaire is factory-sealed and does not need to be opened during installation.

The installation blackout to be ordered separately; blockouts can house between 1-4 luminaires.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)  
+ XXX-XXXX (Accessory 1)

Specifications  
Material description

|                    |  |
|--------------------|--|
| Body               | Marine-grade all aluminium construction. Anodized aluminium extrusion. |
| Lens               | Safety glass lens  |
| Colors             |  |
| Gasket             | Silicone CCG® Controlled Compression Gasket                            |
| Fasteners          | PCS polymer coated stainless steel                                     |
| Ingress protection | IP69K - HIGHEST PROTECTION RATING AVAILABLE                            |
| Impact resistance  | IK08   |












Electrical description

|                  |   |
|------------------|---|
| Power supply     | Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order. |
| Driver / Ballast | Electronic converter with 0-10V interface   |
| Power factor     | > 0.9   |







Additional information

|          |  |
|----------|--|
| Lifetime | Ta=25°/40° L90B10 > 90000h                                 |
| Listings | ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations. |

Options

| Light distribution  | Color temperature  | Nominal Watt |
|---|--|--------------|
|  symmetric linear, wide beam [LW]         |  3000 K | 0 W          |
|  symmetric linear, medium beam [LM]       |  4000 K |              |
|  symmetric linear, narrow beam [LN]       |  2700 K |              |
|  symmetric linear, very narrow beam [LVN] |  |              |
|  asymmetric linear, wallwash [LA10]       |  |              |
|  symmetric linear, medium beam [LM/IW]    |  |              |
|  symmetric linear, wide beam [LW/IW]     |  |              |
|  symmetric linear, narrow beam [LN/IW]  |  |              |

## Configurations

| Light distribution   | Part ID  | Light source                 | Delivered lumens | Rated input power | CRI | Weight (lb) |
|--|----------|------------------------------|------------------|-------------------|-----|-------------|
| asymmetric linear, wallwash [LA10]<br>         | 186-0263 | LED-48/30W / 225 mA - 3000 K | 3074.8           | 33.5 W            | 80  | 13.50       |
|  | 186-0264 | LED-48/30W / 225 mA - 4000 K | 3074.8           | 33.5 W            | 80  | 13.50       |
|  | 186-0444 | LED-48/30W / 225 mA - 2700 K | 3074.8           | 33.5 W            | 80  | 13.50       |
| symmetric linear, medium beam [LM/IW]<br>      | 186-0396 | LED-48/30W / 225 mA - 3000 K | 1603.2           | 33.5 W            | 80  | 13.50       |
|  | 186-0397 | LED-48/30W / 225 mA - 4000 K | 1603.2           | 33.5 W            | 80  | 13.50       |
|  | 186-0483 | LED-48/30W / 225 mA - 2700 K | 1603.2           | 33.5 W            | 80  | 13.50       |
| symmetric linear, medium beam [LM]<br>        | 186-0254 | LED-48/30W / 225 mA - 3000 K | 3210.6           | 33.5 W            | 80  | 13.50       |
|  | 186-0255 | LED-48/30W / 225 mA - 4000 K | 3210.6           | 33.5 W            | 80  | 13.50       |
|  | 186-0442 | LED-48/30W / 225 mA - 2700 K | 3210.6           | 33.5 W            | 80  | 13.50       |
| symmetric linear, narrow beam [LN/IW]<br>    | 186-0398 | LED-48/30W / 225 mA - 3000 K | 1670.5           | 33.5 W            | 80  | 13.50       |
|  | 186-0399 | LED-48/30W / 225 mA - 4000 K | 1670.5           | 33.5 W            | 80  | 13.50       |
|  | 186-0484 | LED-48/30W / 225 mA - 2700 K | 1670.5           | 33.5 W            | 80  | 13.50       |
| symmetric linear, narrow beam [LN]<br>       | 186-0257 | LED-48/30W / 225 mA - 3000 K | 3151.9           | 33.5 W            | 80  | 13.50       |
|  | 186-0258 | LED-48/30W / 225 mA - 4000 K | 3151.9           | 33.5 W            | 80  | 13.50       |
|  | 186-0420 | LED-48/30W / 225 mA - 2700 K | 3151.9           | 33.5 W            | 80  | 13.50       |
| symmetric linear, very narrow beam [LVN]<br> | 186-0260 | LED-48/30W / 225 mA - 3000 K | 3608.9           | 33.5 W            | 80  | 13.50       |
|  | 186-0261 | LED-48/30W / 225 mA - 4000 K | 3608.9           | 33.5 W            | 80  | 13.50       |
|  | 186-0443 | LED-48/30W / 225 mA - 2700 K | 3608.9           | 33.5 W            | 80  | 13.50       |
| symmetric linear, wide beam [LW/IW]<br>  | 186-0394 | LED-48/30W / 225 mA - 3000 K | 1277.3           | 33.5 W            | 80  | 13.50       |
|  | 186-0395 | LED-48/30W / 225 mA - 4000 K | 1277.3           | 33.5 W            | 80  | 13.50       |



## WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 12/06/2025

Inground Luminaires

| Light distribution   | Part ID  | Light source                 | Delivered lumens | Rated input power | CRI | Weight (lb) |
|--|----------|------------------------------|------------------|-------------------|-----|-------------|
|                                      | 186-0482 | LED-48/30W / 225 mA - 2700 K | 1277.3           | 33.5 W            | 80  | 13.50       |
| symmetric linear, wide beam [LW]<br> | 186-0251 | LED-48/30W / 225 mA - 3000 K | 2873.6           | 33.5 W            | 80  | 13.50       |
|  | 186-0252 | LED-48/30W / 225 mA - 4000 K | 2873.6           | 33.5 W            | 80  | 13.50       |
|  | 186-0441 | LED-48/30W / 225 mA - 2700 K | 2873.6           | 33.5 W            | 80  | 13.50       |

Electrical Accessories

Sealable junction box


| Description                   | Part ID  | C1   | M1     | M2            |
|-------------------------------|----------|------|--------|---------------|
| Sealable junction box SJB 130 | 185-1624 | 5.75 | Ø 0.39 | Ø 0.47 - 0.75 |



Optical Accessories

Honeycomb louvre


| Description   | Part ID  | C1    | H1   |
|---------------|----------|-------|------|
| IW for ETV130 | 186-0295 | 35.35 | 1.18 |

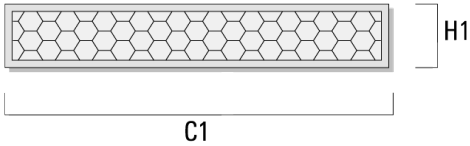


Mounting Accessories

Installation blackout, Type I

| Description                  | Part ID  | A      | C1   | D1   | D2   | Weight (lb) |
|------------------------------|----------|--------|------|------|------|-------------|
| BEV130-I-1/927 (1 luminaire) | 186-0310 | 38.38" | 6.30 | 2.13 | 4.72 | 10.36 lbs   |

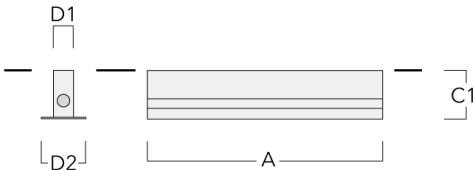


|                               |          |       |      |      |      |       |
|-------------------------------|----------|-------|------|------|------|-------|
| BEV130-I-2/927 (2 luminaires) | 186-0311 | 74.96 | 6.30 | 2.13 | 4.72 | 19.84 |
|-------------------------------|----------|-------|------|------|------|-------|

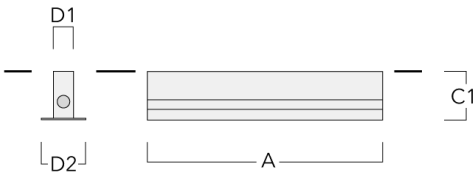



Inground Luminaires

| Description                   | Part ID  | A      | C1   | D1   | D2   | Weight (lb) |
|-------------------------------|----------|--------|------|------|------|-------------|
| BEV130-I-3/927 (3 luminaires) | 186-0312 | 111.54 | 6.30 | 2.13 | 4.72 | 29.10 lbs   |

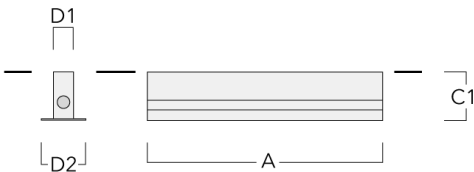

|                               |          |        |      |      |      |       |
|-------------------------------|----------|--------|------|------|------|-------|
| BEV130-I-4/927 (4 luminaires) | 186-0313 | 148.11 | 6.30 | 2.13 | 4.72 | 38.58 |
|-------------------------------|----------|--------|------|------|------|-------|

