

Description

IP69. IK08. Marine-grade, all-aluminium construction. Anodized aluminium extrusion. PCS hardware. Silicone rubber gasket. Complete with cable gland and 0.5 m of flexible PVC-free cable. Safety glass lens. Luminaire can be driven over at low speed, without accelerating or turning, by vehicles with air-filled tyres, at a weight up to 5 tonnes per wheel. Max. static load, 3 tonnes (according to DIN EN 60598-2-13). Luminaire is factory-sealed and does not need to be opened during installation. Optional 2200 K version available. To be specified at time of ordering.

Integral EC electronic converter in thermally-separated compartment. Advanced thermal management protects LEDs while optimising lumens output. Removable LED boards for upgrading. DALI interface.

Sealable junction box included in supply.

Pre-installation blackout is recommended for mounting, available on request.

ETV130 LED

Inground luminaires

we-ef

Specifications

Material description

Body	Marine-grade, all-aluminium construction
Lens	Safety glass lens
Colours	
Gasket	Silicone rubber gasket
Fasteners	PCS hardware
Ingress protection	IP69
Impact resistance	IK08

Electrical description

Power supply	220-240V / 50-60 Hz
Driver / Ballast	Integral electronic converter with DALI interface in thermally-separated compartment
Power factor	> 0.9

Additional information









Lifetime	Ta=25° L90B10 > 90000h
----------	------------------------

ETV130 LED

Inground luminaires

Options

Light distribution

-  symmetric linear, wide beam [LB]
-  symmetric linear, medium beam [LM]
-  symmetric linear, narrow beam [LE]
-  symmetric linear, very narrow beam [LEE]
-  asymmetric linear, wallwash [LA10]
-  symmetric linear, medium beam [LM/IW]
-  symmetric linear, wide beam [LB/IW]
-  symmetric linear, narrow beam [LE/IW]








Colour temperature

-  3000 K
-  4000 K
-  2700 K

Nominal Watt

0 W


Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
asymmetric linear, wallwash [LA10] 	186-0263	LED-48/30W / 225 mA - 3000 K	3074.8	33.5 W	80	6.00
	186-0264	LED-48/30W / 225 mA - 4000 K	3074.8	33.5 W	80	6.00
	186-0444	LED-48/30W / 225 mA - 2700 K	3074.8	33.5 W	80	6.00
symmetric linear, medium beam [LM/IW] 	186-0396	LED-48/30W / 225 mA - 3000 K	1603.2	33.5 W	80	6.00
	186-0397	LED-48/30W / 225 mA - 4000 K	1603.2	33.5 W	80	6.00
	186-0483	LED-48/30W / 225 mA - 2700 K	1603.2	33.5 W	80	6.00
symmetric linear, medium beam [LM] 	186-0254	LED-48/30W / 225 mA - 3000 K	3210.6	33.5 W	80	6.00
	186-0255	LED-48/30W / 225 mA - 4000 K	3210.6	33.5 W	80	6.00
	186-0442	LED-48/30W / 225 mA - 2700 K	3210.6	33.5 W	80	6.00
symmetric linear, narrow beam [LE/IW] 	186-0398	LED-48/30W / 225 mA - 3000 K	1670.5	33.5 W	80	6.00
	186-0399	LED-48/30W / 225 mA - 4000 K	1670.5	33.5 W	80	6.00
	186-0484	LED-48/30W / 225 mA - 2700 K	1670.5	33.5 W	80	6.00
symmetric linear, narrow beam [LE] 	186-0257	LED-48/30W / 225 mA - 3000 K	3151.9	33.5 W	80	6.00
	186-0258	LED-48/30W / 225 mA - 4000 K	3151.9	33.5 W	80	6.00
	186-0420	LED-48/30W / 225 mA - 2700 K	3151.9	33.5 W	80	6.00
symmetric linear, very narrow beam [LEE] 	186-0260	LED-48/30W / 225 mA - 3000 K	3608.9	33.5 W	80	6.00
	186-0261	LED-48/30W / 225 mA - 4000 K	3608.9	33.5 W	80	6.00
	186-0443	LED-48/30W / 225 mA - 2700 K	3608.9	33.5 W	80	6.00
symmetric linear, wide beam [LB/IW] 	186-0394	LED-48/30W / 225 mA - 3000 K	1277.3	33.5 W	80	6.00
	186-0395	LED-48/30W / 225 mA - 4000 K	1277.3	33.5 W	80	6.00
	186-0482	LED-48/30W / 225 mA - 2700 K	1277.3	33.5 W	80	6.00

ETV130 LED

Inground luminaires

we-ef

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
symmetric linear, wide beam [LB] 	186-0251	LED-48/30W / 225 mA - 3000 K	2873.6	33.5 W	80	6.00
	186-0252	LED-48/30W / 225 mA - 4000 K	2873.6	33.5 W	80	6.00
	186-0441	LED-48/30W / 225 mA - 2700 K	2873.6	33.5 W	80	6.00

WE-EF LIGHTING (Thailand) Co., Ltd.

57 Moo 5, Kingkaew Rd., Bangplee, 10540 Samutprakarn - Phone: +66 2 738 96 20 - Fax: +66 2 738 96 29


<https://we-ef.com/asia>

Subject to technical changes and errors. - Generated on 23/11/2024

Mounting Accessories

Installation blackout, Type II

Description	Part ID	A	C1	D1	D2	Weight (kg)
BEV130-II-1/927 (1 luminaire)	186-0285	975	130	55	120	3.50

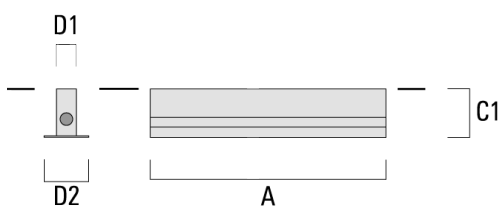


BEV130-II-2/927 (2 luminaires)	186-0286	1904	130	55	120	6.70
--------------------------------	----------	------	-----	----	-----	------




Inground luminaires

Description	Part ID	A	C1	D1	D2	Weight (kg)
BEV130-II-3/927 (3 luminaires)	186-0287	2833	130	55	120	9.70

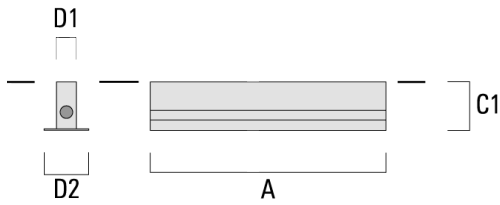

BEV130-II-4/927 (4 luminaires)	186-0288	3762	130	55	120	12.90
--------------------------------	----------	------	-----	----	-----	-------

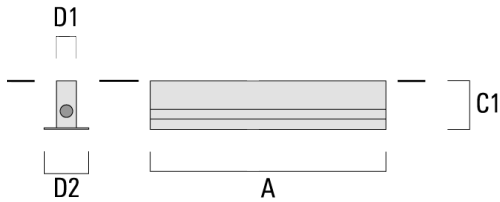


Installation blackout, Type I

Description	Part ID	A	C1	D1	D2	Weight (kg)
BEV130-I-1/927 (1 luminaire)	186-0310	975	160	55	120	4.70




BEV130-I-2/927 (2 luminaires)	186-0311	1904	160	55	120	9
-------------------------------	----------	------	-----	----	-----	---

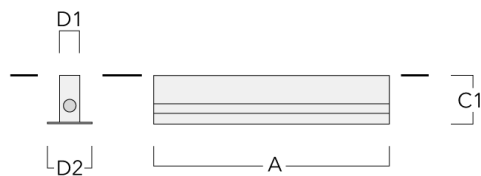


Inground luminaires

Description	Part ID	A	C1	D1	D2	Weight (kg)
BEV130-I-3/927 (3 luminaires)	186-0312	2833	160	55	120	13.20

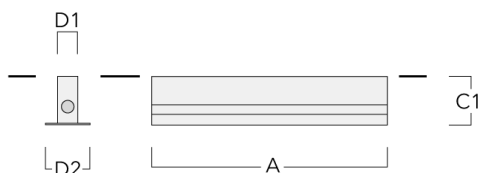

BEV130-I-4/927 (4 luminaires)	186-0313	3762	160	55	120	17.50
-------------------------------	----------	------	-----	----	-----	-------

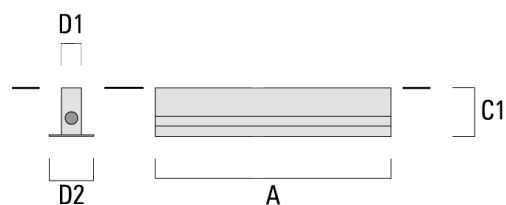

Optical Accessories

Honeycomb louvre

Description	Part ID	C1	H1
Honeycomb louvre IW	186-0295	898	30

