


# ETV140 LED


## Inground Luminaires

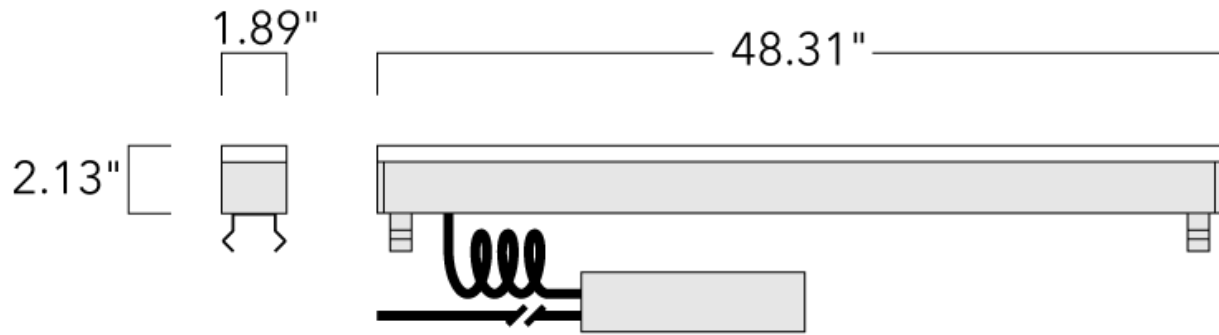

### WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030  
customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 11/23/2024

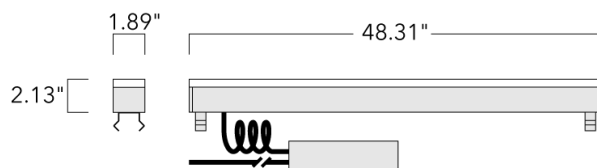

### Description

IP69K. Class I. IK08. Marine-grade, all aluminum construction. Anodized aluminum extrusion. PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens; max static load, 3.3 tons (6,600 lbs) (according to DIN EN 60598-2-13). Luminaire can be driven over at low speed, without accelerating or turning, by vehicles with air-filled tires, at a weight up to 5.5 tons (11,000 lbs) per wheel. Factory-sealed termination chamber complete with cable gland and 3 ft of flexible PVC-free, gel-impregnated anti-wicking cable. Linear PMMA LED lens. Integral driver in thermally separated compartment. Factory-installed LED circuit board. LED board can be easily removed for upgrading. 0-10V Dimming. Luminaire is factory-sealed and does not need to be opened during installation.

The installation blackout to be ordered separately; blockouts can house between 1-4 luminaires.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)  
+ XXX-XXXX (Accessory 1)

### WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 11/23/2024

# ETV140 LED

## Inground Luminaires

### Specifications

#### Material description

---

Body	Marine-grade all aluminium construction. Anodized aluminium extrusion.
Lens	Safety glass lens
Colors	
Gasket	Silicone rubber gasket
Fasteners	PCS polymer coated stainless steel
Ingress protection	IP69K - HIGHEST PROTECTION RATING AVAILABLE
Impact resistance	IK08

---

#### Electrical description

---

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Driver / Ballast	Electronic converter with 0-10V interface
Power factor	> 0.9

---

#### Additional information

---

Lifetime	Ta=25°/40° L90B10 > 90000h
Listings	ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations.

---

#### WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 11/23/2024

# ETV140 LED

## Inground Luminaires



### Options

#### Light distribution

#### Color temperature

#### Nominal Watt



symmetric linear, wide beam [LW]



3000 K

0 W



symmetric linear, medium beam [LM]



4000 K



symmetric linear, narrow beam [LN]



2700 K



symmetric linear, very narrow beam [LVN]



asymmetric linear, wallwash [LA10]



symmetric linear, wide beam [LW/IW]



symmetric linear, medium beam [LM/IW]









symmetric linear, narrow beam [LN/IW]

#### WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030  
customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 11/23/2024

## Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (lb)
asymmetric linear, wallwash [LA10] 	186-0278	LED-64/40W / 225 mA - 3000 K	4099.7	44 W	80	17.00
	186-0279	LED-64/40W / 225 mA - 4000 K	4099.7	44 W	80	17.00
	186-0449	LED-64/40W / 225 mA - 2700 K	4099.7	44 W	80	17.00
symmetric linear, medium beam [LM/ IW] 	186-0406	LED-64/40W / 225 mA - 3000 K	2137.6	44 W	80	17.00
	186-0407	LED-64/40W / 225 mA - 4000 K	2137.6	44 W	80	17.00
	186-0488	LED-64/40W / 225 mA - 2700 K	2137.6	44 W	80	17.00
symmetric linear, medium beam [LM] 	186-0269	LED-64/40W / 225 mA - 3000 K	4280.8	44 W	80	17.00
	186-0270	LED-64/40W / 225 mA - 4000 K	4280.8	44 W	80	17.00
	186-0446	LED-64/40W / 225 mA - 2700 K	4280.8	44 W	80	17.00
symmetric linear, narrow beam [LN/ IW] 	186-0408	LED-64/40W / 225 mA - 3000 K	2227.4	44 W	80	17.00
	186-0409	LED-64/40W / 225 mA - 4000 K	2227.4	44 W	80	17.00
	186-0489	LED-64/40W / 225 mA - 2700 K	2227.4	44 W	80	17.00
symmetric linear, narrow beam [LN] 	186-0272	LED-64/40W / 225 mA - 3000 K	4202.5	44 W	80	17.00
	186-0273	LED-64/40W / 225 mA - 4000 K	4202.5	44 W	80	17.00
symmetric linear, very narrow beam [LVN] 	186-0275	LED-64/40W / 225 mA - 3000 K	4811.9	44 W	80	17.00
	186-0276	LED-64/40W / 225 mA - 4000 K	4811.9	44 W	80	17.00
	186-0448	LED-64/40W / 225 mA - 2700 K	4811.9	44 W	80	17.00
symmetric linear, wide beam [LW/IW] 	186-0404	LED-64/40W / 225 mA - 3000 K	1703	44 W	80	17.00
	186-0405	LED-64/40W / 225 mA - 4000 K	1703	44 W	80	17.00

## WE-EF LIGHTING USA, LLC


410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 11/23/2024

# ETV140 LED

## Inground Luminaires

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (lb)
	186-0487	LED-64/40W / 225 mA - 2700 K	1703	44 W	80	17.00
symmetric linear, wide beam [LW]	186-0266	LED-64/40W / 225 mA - 3000 K	3831.5	44 W	80	17.00
	186-0267	LED-64/40W / 225 mA - 4000 K	3831.5	44 W	80	17.00
	186-0445	LED-64/40W / 225 mA - 2700 K	3831.5	44 W	80	17.00

**WE-EF LIGHTING USA, LLC**

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030  
customersupport.usa@we-ef.com - <https://we-ef.com/us>  
Subject to technical changes and errors. - Generated on 11/23/2024


**Electrical Accessories**

**Sealable junction box**

---

Description	Part ID	C1	M1	M2
Sealable junction box SJB 130	185-1624	5.75	Ø 0.39	Ø 0.47 - 0.75

---

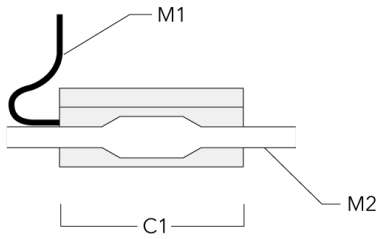

# ETV140 LED

## Inground Luminaires


### Optical Accessories

#### Honeycomb louvre

---

Description	Part ID	C1	H1
IW for ETV140	186-0296	47.16	1.18

---

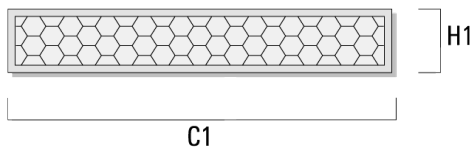

---

#### WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030  
customersupport.usa@we-ef.com - <https://we-ef.com/us>


Subject to technical changes and errors. - Generated on 11/23/2024




**Mounting Accessories**

**Installation blockout, Type I**

Description	Part ID	Additional information	A	C1	D1	D2	Weight (lb)
BEV140-I-1/1227 (1 luminaire)	186-0314	Blockout Accessory Depth (C1) to 6.3".	50.2	6.30	2.13	4.72	13.45 lbs

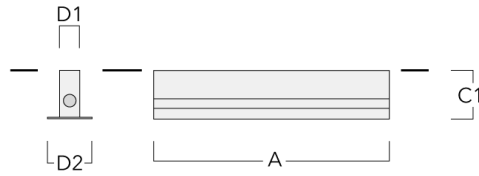


BEV140-I-2/1227 (2 luminaires)	186-0315	Blockout Accessory Depth (C1) to 6.3".	98.58	6.30	2.13	4.72	25.79 lbs
--------------------------------	----------	--	-------	------	------	------	-----------

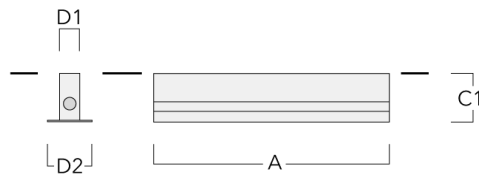


# ETV140 LED

## Inground Luminaires

Description	Part ID	Additional information	A	C1	D1	D2	Weight (lb)
BEV140-I-3/1227 (3 luminaires)	186-0316	Blockout Accessory Depth (C1) to 6.3".	146.97	6.30	2.13	4.72	38.36 lbs

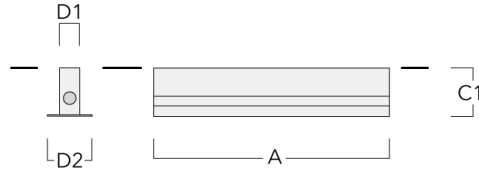

BEV140-I-4/1227 (4 luminaires)	186-0317	Blockout Accessory Depth (C1) to 6.3".	195.35	6.30	2.13	4.72	50.68
--------------------------------	----------	--	--------	------	------	------	-------

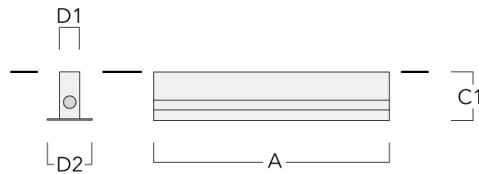

### WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030  
customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 11/23/2024