

SLS410 LED

Wall luminaires surface mounted




Description

IP66. Class I. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection + primer including PCS hardware. Safety glass lens. Silicone rubber gasket. Luminaire is factory-sealed and does not need to be opened during installation.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. Two cable entries.

Luminaire can be mounted for up or down lighting. Optional 2200 K version up to max. 1050mA available. To be specified at time of ordering.

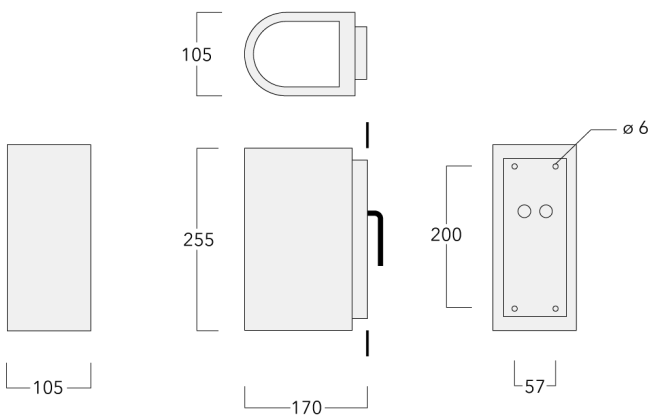




SLS410 LED

Wall luminaires surface mounted

Specifications

Material description

Body	Marine-grade, die-cast aluminium alloy
Lens	Safety glass lens
Colours	 RAL9004 Signal black  RAL9006 White aluminium  RAL9007 Grey aluminium
Gasket	Silicone rubber gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware (unpainted)
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE+Primer

Electrical description

Power supply	230V / 50 Hz
Driver / Ballast	Integral EC electronic converter

Additional information

Lifetime	Ta=40° L90B10 > 90000h
Warranty	The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on www.we-ef.com for further details.

SLS410 LED

Wall luminaires surface mounted

we-ef

Options

Light distribution



symmetric, medium beam [M]



symmetric, medium beam up and down [M/M]



asymmetric, forward throw [A60]



symmetric, narrow beam up and medium beam down [E/M]



symmetric, narrow beam [E]



symmetric, medium beam up and forward throw down [M/A60]



symmetric, narrow beam up and forward throw down [E/A60]



symmetric, narrow beam up and down [E/E]

Colour temperature

Nominal Watt



3000 K







4000 K



2700 K

0 W

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
asymmetric, forward throw [A60] 	131-9472	LED-3/6W / 700 mA - 3000 K	260.6	7.5 W	80	3.30
	131-9476	LED-3/6W / 700 mA - 4000 K	278.5	7.5 W	80	3.30
	131-9492	LED-3/6W / 700 mA - 2700 K	242.6	7.5 W	80	3.30
	131-9774	LED-3/9W / 1050mA - 3000 K	386.4	11 W	80	3.30
	131-9777	LED-3/9W / 1050mA - 4000 K	404.3	11 W	80	3.30
	131-9780	LED-3/13W / 1400 mA - 3000 K	494.2	15.8 W	80	3.30
	131-9783	LED-3/13W / 1400 mA - 4000 K	516.7	15.8 W	80	3.30
	131-9908	LED-3/9W / 1050 mA - 2700 K	368.4	11 W	80	3.30
	131-9911	LED-3/13W / 1400 mA - 2700 K	467.2	15.8 W	80	3.30
symmetric, medium beam [M] 	131-9473	LED-3/6W / 700 mA - 3000 K	586.5	7.5 W	80	3.30
	131-9477	LED-3/6W / 700 mA - 4000 K	626.9	7.5 W	80	3.30
	131-9493	LED-3/6W / 700 mA - 2700 K	546	7.5 W	80	3.30
	131-9775	LED-3/9W / 1050mA - 3000 K	869.6	11 W	80	3.30
	131-9778	LED-3/9W / 1050mA - 4000 K	910	11 W	80	3.30
	131-9781	LED-3/13W / 1400 mA - 3000 K	1112.2	15.8 W	80	3.30
	131-9784	LED-3/13W / 1400 mA - 4000 K	1162.8	15.8 W	80	3.30
	131-9909	LED-3/9W / 1050 mA - 2700 K	829.1	11 W	80	3.30
	131-9912	LED-3/13W / 1400 mA - 2700 K	1051.6	15.8 W	80	3.30
symmetric, medium beam up and down [M/M] 	131-9483	LED-2x3/12W / 700 mA - 3000K	1173.1	15 W	80	3.30
	131-9489	LED-2x3/12W / 700 mA - 4000K	1254	15 W	80	3.30
	131-9497	LED-2x3/12W / 700 mA - 2700 K	1092.2	15 W	80	3.30
	131-9864	LED-2x3/18W / 1050mA - 3000 K	1739.5	22 W	80	3.30
	131-9869	LED-2x3/18W / 1050mA - 4000 K	1820.4	22 W	80	3.30
	131-9874	LED-2x3/26W / 1400mA - 3000 K	2224.9	31 W	80	3.30
	131-9879	LED-2x3/26W / 1400mA - 4000 K	2326	31 W	80	3.30
	131-9916	LED-2x3/18W / 1050 mA - 2700 K	1658.5	22 W	80	3.30
	131-9921	LED-2x3/26W / 1400 mA - 2700 K	2103.5	31 W	80	3.30
symmetric, medium beam up and forward throw down [M/A60] 	131-9481	LED-2x3/12W / 700 mA - 3000K	847.2	15 W	80	3.30
	131-9487	LED-2x3/12W / 700 mA - 4000K	905.7	15 W	80	3.30
	131-9495	LED-2x3/12W / 700 mA - 2700 K	788.8	15 W	80	3.30
	131-9862	LED-2x3/18W / 1050mA - 3000 K	1256.2	22 W	80	3.30
	131-9867	LED-2x3/18W / 1050mA - 4000 K	1314.7	22 W	80	3.30
	131-9872	LED-2x3/26W / 1400mA - 3000 K	1606.8	31 W	80	3.30
	131-9877	LED-2x3/26W / 1400mA - 4000 K	1679.9	31 W	80	3.30
	131-9914	LED-2x3/18W / 1050 mA - 2700 K	1197.8	22 W	80	3.30

Wall luminaires surface mounted

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
symmetric, narrow beam [E] 	131-9919	LED-2x3/26W / 1400 mA - 2700 K	1519.2	31 W	80	3.30
	131-9474	LED-3/6W / 700 mA - 3000 K	656.9	7.5 W	80	3.30
	131-9478	LED-3/6W / 700 mA - 4000 K	702.2	7.5 W	80	3.30
	131-9494	LED-3/6W / 700 mA - 2700 K	611.6	7.5 W	80	3.30
	131-9776	LED-3/9W / 1050mA - 3000 K	974	11 W	80	3.30
	131-9779	LED-3/9W / 1050mA - 4000 K	1019.3	11 W	80	3.30
	131-9782	LED-3/13W / 1400 mA - 3000 K	1245.8	15.8 W	80	3.30
	131-9785	LED-3/13W / 1400 mA - 4000 K	1302.5	15.8 W	80	3.30
	131-9910	LED-3/9W / 1050 mA - 2700 K	928.7	11 W	80	3.30
	131-9913	LED-3/13W / 1400 mA - 2700 K	1177.9	15.8 W	80	3.30
symmetric, narrow beam up and down [E/E] 	131-9485	LED-2x3/12W / 700 mA - 3000K	1314.2	15 W	80	3.30
	131-9491	LED-2x3/12W / 700 mA - 4000K	1404.8	15 W	80	3.30
	131-9499	LED-2x3/12W / 700 mA - 2700 K	1223.6	15 W	80	3.30
	131-9866	LED-2x3/18W / 1050mA - 3000 K	1948.6	22 W	80	3.30
	131-9871	LED-2x3/18W / 1050mA - 4000 K	2039.3	22 W	80	3.30
	131-9876	LED-2x3/26W / 1400mA - 3000 K	2492.4	31 W	80	3.30
	131-9881	LED-2x3/26W / 1400mA - 4000 K	2605.7	31 W	80	3.30
	131-9918	LED-2x3/18W / 1050 mA - 2700 K	1858	22 W	80	3.30
	131-9923	LED-2x3/26W / 1400 mA - 2700 K	2356.5	31 W	80	3.30
	symmetric, narrow beam up and forward throw down [E/A60] 	131-9482	LED-2x3/12W / 700 mA - 3000K	917.8	15 W	80
131-9488		LED-2x3/12W / 700 mA - 4000K	981.1	15 W	80	3.30
131-9496		LED-2x3/12W / 700 mA - 2700 K	854.5	15 W	80	3.30
131-9863		LED-2x3/18W / 1050mA - 3000 K	1360.8	22 W	80	3.30
131-9868		LED-2x3/18W / 1050mA - 4000 K	1424.1	22 W	80	3.30
131-9873		LED-2x3/26W / 1400mA - 3000 K	1740.6	31 W	80	3.30
131-9878		LED-2x3/26W / 1400mA - 4000 K	1819.7	31 W	80	3.30
131-9915		LED-2x3/18W / 1050 mA - 2700 K	1297.5	22 W	80	3.30
131-9920		LED-2x3/26W / 1400 mA - 2700 K	1645.7	31 W	80	3.30
symmetric, narrow beam up and medium beam down [E/M] 		131-9484	LED-2x3/12W / 700 mA - 3000K	1243.7	15 W	80
	131-9490	LED-2x3/12W / 700 mA - 4000K	1329.4	15 W	80	3.30
	131-9498	LED-2x3/12W / 700 mA - 2700 K	1157.9	15 W	80	3.30
	131-9865	LED-2x3/18W / 1050mA - 3000 K	1844	22 W	80	3.30
	131-9870	LED-2x3/18W / 1050mA - 4000 K	1929.8	22 W	80	3.30
	131-9875	LED-2x3/26W / 1400mA - 3000 K	2358.7	31 W	80	3.30
	131-9880	LED-2x3/26W / 1400mA - 4000 K	2465.9	31 W	80	3.30
	131-9917	LED-2x3/18W / 1050 mA - 2700 K	1758.3	22 W	80	3.30

SLS410 LED

Wall luminaires surface mounted

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
	131-9922	LED-2x3/26W / 1400 mA - 2700 K	2230	31 W	80	3.30

WE-EF LIGHTING Pty Ltd

6/13 Downard Street, 3195 Braeside, Victoria - Phone: +61 3 8587 0444 - Fax: +61 3 8587 0499

info.australia@we-ef.com - <https://we-ef.com/aus>

Subject to technical changes and errors. - Generated on 23/11/2024

SLS410 LED

Wall luminaires surface mounted



Control

1-10 V analogue dimming interface

Description	Part ID	C
1-10 V analogue dimming interface	430-0011	90

WE-EF LIGHTING Pty Ltd

6/13 Downard Street, 3195 Braeside, Victoria - Phone: +61 3 8587 0444 - Fax: +61 3 8587 0499

info.australia@we-ef.com - <https://we-ef.com/aus>

Subject to technical changes and errors. - Generated on 23/11/2024

Mounting Accessories

Column fitter

Description	Part ID	C1	D1	H1	H2	M1	Weight (kg)
CF-410/420	131-9140	83	≥ 140	220	100	6	0.60

