

SLS410 LED

Surface Mounted Wall Luminaires

we-ef



Description


Surface-mounted wall luminaire.

IP66. Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Two cable entries. CAD-optimized optics for superior illumination and glare control. Integral driver. OLC® One LED Concept. Factory-installed LED circuit board. 0-10V Dimming comes standard with luminaire.

Suitable for Up, Down, or Up/Down light distribution. Supplied with wall plate to fit over 4" recessed junction box.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.



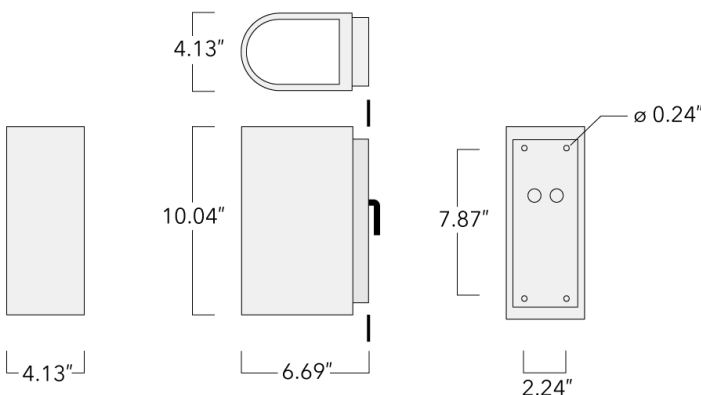

Example: XXX-XXXX-9004 (Black)
+ XXX-XXXX (Accessory 1)



WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030
customersupport.usa@we-ef.com - <https://we-ef.com/us>
Subject to technical changes and errors. - Generated on 11/23/2024

Surface Mounted Wall Luminaires**Specifications****Material description**

Body	Marine-grade, die-cast aluminium alloy
Lens	Safety glass lens
Colors	 RAL9004 Black  RAL9007 Grey Metallic  RAL9016 White  RAL8019 Dark Bronze
Gasket	Silicone rubber gasket
Fasteners	PCS hardware
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE

Electrical description

Power supply	Integral [ECG] electronic 0-10 V dimmable driver in 120-277 universal voltage.
Driver / Ballast	Integral EC electronic converter

Additional information

Lifetime	Ta=25°/40° L90B10 > 90000h
BUG Rating	Please see individual Spec Sheets for classification of Backlight, Uplight and Glare.
Listings	ETL listed. Suitable for wet locations.

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030
customersupport.usa@we-ef.com - <https://we-ef.com/us>
Subject to technical changes and errors. - Generated on 11/23/2024

SLS410 LED

Surface Mounted Wall Luminaires

we-ef

Options

Light distribution



symmetric, medium beam [M]



symmetric, medium beam up and down [M/M]



asymmetric, forward throw [A60]



symmetric, narrow beam up and medium beam down [N/M]



symmetric, narrow beam [N]



symmetric, narrow beam up and forward-throw down [N/A60]



symmetric, narrow beam up and down [N/N]



symmetric, medium beam up and forward throw down [M/A60]

Color temperature

Nominal Watt



3000 K



4000 K



2700 K

0 W





WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030
customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 11/23/2024

Surface Mounted Wall Luminaires

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (lb)
asymmetric, forward throw [A60] 	131-0226	LED-3/9W / 1050mA - 3000 K	386.4	11 W	80	7.70
	131-0227	LED-3/9W / 1050mA - 4000 K	404.3	11 W	80	7.70
	131-0232	LED-3/13W / 1400 mA - 3000 K	494.2	15.8 W	80	7.70
	131-0233	LED-3/13W / 1400 mA - 4000 K	516.7	15.8 W	80	7.70
	131-9472	LED-3/6W / 700 mA - 3000 K	260.6	7.5 W	80	7.20
	131-9476	LED-3/6W / 700 mA - 4000 K	278.5	7.5 W	80	7.20
	131-9492	LED-3/6W / 700 mA - 2700 K	242.6	7.5 W	80	6.80
	131-9908	LED-3/9W / 1050 mA - 2700 K	368.4	11 W	80	6.80
	131-9911	LED-3/13W / 1400 mA - 2700 K	467.2	15.8 W	80	7.30
symmetric, medium beam [M] 	131-0222	LED-3/9W / 1050mA - 3000 K	869.6	11 W	80	7.70
	131-0223	LED-3/9W / 1050mA - 4000 K	910	11 W	80	7.70
	131-0228	LED-3/13W / 1400 mA - 3000 K	1112.2	15.8 W	80	7.70
	131-0229	LED-3/13W / 1400 mA - 4000 K	1162.8	15.8 W	80	7.70
	131-9473	LED-3/6W / 700 mA - 3000 K	586.5	7.5 W	80	7.20
	131-9477	LED-3/6W / 700 mA - 4000 K	626.9	7.5 W	80	7.30
	131-9493	LED-3/6W / 700 mA - 2700 K	546	7.5 W	80	6.80
	131-9909	LED-3/9W / 1050 mA - 2700 K	829.1	11 W	80	6.80
	131-9912	LED-3/13W / 1400 mA - 2700 K	1051.6	15.8 W	80	7.30
symmetric, medium beam up and down [M/M] 	131-9483	LED-2x3/12W / 700 mA - 3000K	1173.1	15 W	80	7.30
	131-9489	LED-2x3/12W / 700 mA - 4000K	1254	15 W	80	7.30
	131-9497	LED-2x3/12W / 700 mA - 2700 K	1092.2	15 W	80	6.80
	131-9864	LED-2x3/18W / 1050mA - 3000 K	1739.5	22 W	80	7.34
	131-9869	LED-2x3/18W / 1050mA - 4000 K	1820.4	22 W	80	7.20
	131-9874	LED-2x3/26W / 1400mA - 3000 K	2224.9	31 W	80	7.20
	131-9879	LED-2x3/26W / 1400mA - 4000 K	2326	31 W	80	7.20
	131-9916	LED-2x3/18W / 1050 mA - 2700 K	1658.5	22 W	80	7.30
	131-9921	LED-2x3/26W / 1400 mA - 2700 K	2103.5	31 W	80	7.30
symmetric, medium beam up and forward throw down [M/A60] 	131-9495	LED-2x3/12W / 700 mA - 2700 K	788.8	15 W	80	6.80
	131-9862	LED-2x3/18W / 1050mA - 3000 K	1256.2	22 W	80	7.34
	131-9867	LED-2x3/18W / 1050mA - 4000 K	1314.7	22 W	80	7.20
	131-9872	LED-2x3/26W / 1400mA - 3000 K	1606.8	31 W	80	7.20
	131-9877	LED-2x3/26W / 1400mA - 4000 K	1679.9	31 W	80	7.20





WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 11/23/2024

Surface Mounted Wall Luminaires

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (lb)
	131-9914	LED-2x3/18W / 1050 mA - 2700 K	1197.8	22 W	80	7.30
	131-9919	LED-2x3/26W / 1400 mA - 2700 K	1519.2	31 W	80	7.30
symmetric, narrow beam [N] 	131-0224	LED-3/9W / 1050mA - 3000 K	974	11 W	80	7.70
	131-0225	LED-3/9W / 1050mA - 4000 K	1019.3	11 W	80	7.20
	131-0230	LED-3/13W / 1400 mA - 3000 K	1245.8	15.8 W	80	7.70
	131-0231	LED-3/13W / 1400 mA - 4000 K	1302.5	15.8 W	80	7.70
	131-9474	LED-3/6W / 700 mA - 3000 K	656.9	7.5 W	80	7.20
	131-9478	LED-3/6W / 700 mA - 4000 K	702.2	7.5 W	80	7.30
	131-9494	LED-3/6W / 700 mA - 2700 K	611.6	7.5 W	80	6.80
	131-9910	LED-3/9W / 1050 mA - 2700 K	928.7	11 W	80	7.20
	131-9913	LED-3/13W / 1400 mA - 2700 K	1177.9	15.8 W	80	7.30
symmetric, narrow beam up and down [N/N] 	131-9485	LED-2x3/12W / 700 mA - 3000K	1314.2	15 W	80	7.20
	131-9491	LED-2x3/12W / 700 mA - 4000K	1404.8	15 W	80	7.30
	131-9499	LED-2x3/12W / 700 mA - 2700 K	1223.6	15 W	80	7.30
	131-9866	LED-2x3/18W / 1050mA - 3000 K	1948.6	22 W	80	7.34
	131-9871	LED-2x3/18W / 1050mA - 4000 K	2039.3	22 W	80	7.20
	131-9876	LED-2x3/26W / 1400mA - 3000 K	2492.4	31 W	80	7.20
	131-9881	LED-2x3/26W / 1400mA - 4000 K	2605.7	31 W	80	7.20
	131-9918	LED-2x3/18W / 1050 mA - 2700 K	1858	22 W	80	7.30
	131-9923	LED-2x3/26W / 1400 mA - 2700 K	2356.5	31 W	80	7.30
symmetric, narrow beam up and forward-throw down [N/A60] 	131-9482	LED-2x3/12W / 700 mA - 3000K	917.8	15 W	80	7.30
	131-9488	LED-2x3/12W / 700 mA - 4000K	981.1	15 W	80	7.20
	131-9496	LED-2x3/12W / 700 mA - 2700 K	854.5	15 W	80	6.80
	131-9863	LED-2x3/18W / 1050mA - 3000 K	1360.8	22 W	80	7.34
	131-9868	LED-2x3/18W / 1050mA - 4000 K	1424.1	22 W	80	7.20
	131-9873	LED-2x3/26W / 1400mA - 3000 K	1740.6	31 W	80	7.20
	131-9878	LED-2x3/26W / 1400mA - 4000 K	1819.7	31 W	80	7.20
	131-9915	LED-2x3/18W / 1050 mA - 2700 K	1297.5	22 W	80	7.30
	131-9920	LED-2x3/26W / 1400 mA - 2700 K	1645.7	31 W	80	7.30
symmetric, narrow beam up and medium beam down [N/M]	131-9484	LED-2x3/12W / 700 mA - 3000K	1243.7	15 W	80	7.30
	131-9490	LED-2x3/12W / 700 mA - 4000K	1329.4	15 W	80	7.30

WE-EF LIGHTING USA, LLC


410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 11/23/2024

SLS410 LED

Surface Mounted Wall Luminaires

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (lb)
	131-9498	LED-2x3/12W / 700 mA - 2700 K	1157.9	15 W	80	7.3
	131-9865	LED-2x3/18W / 1050mA - 3000 K	1844	22 W	80	7.34
	131-9870	LED-2x3/18W / 1050mA - 4000 K	1929.8	22 W	80	7.20
	131-9875	LED-2x3/26W / 1400mA - 3000 K	2358.7	31 W	80	7.20
	131-9880	LED-2x3/26W / 1400mA - 4000 K	2465.9	31 W	80	7.20
	131-9917	LED-2x3/18W / 1050 mA - 2700 K	1758.3	22 W	80	7.30
	131-9922	LED-2x3/26W / 1400 mA - 2700 K	2230	31 W	80	7.30


WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030
customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 11/23/2024

Mounting Accessories**Column fitter**

Description	Part ID	C1	D1	H1	H2	M1	Weight (lb)
CF-410/420	131-9140	3.27	≥ 5.51	8.66	3.94	0.24	1.32

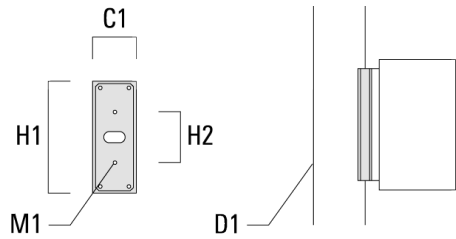

Surface Mounted Wall Luminaires

Surface Collar

Description	Part ID	A	B	C1	D1	D2	D3	M1	M2
VLS/SLS Surface Collar	131-6004	8.66	3.66	1.75	∅1	∅1.5	∅0.38	6	2

