

## Surface Mounted Wall Luminaires



### Description


IP66. Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Two cable entries. CAD-optimized optics for superior illumination and glare control. Integral driver. OLC® One LED Concept. Factory-installed LED circuit board. 0-10V Dimming comes standard with luminaire.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)

+ XXX-XXXX (Accessory 1)

For DarkSky compliant configurations of this product, please find the spec sheet and DarkSky certificate in the library.

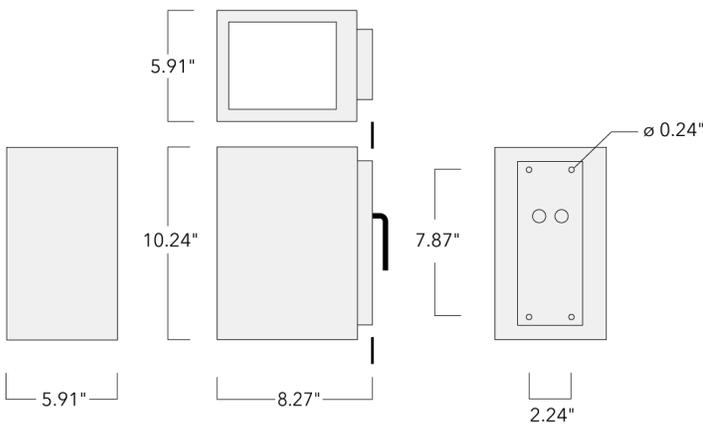

## Surface Mounted Wall Luminaires

## Specifications

## Material description

Body	Marine-grade, die-cast aluminium alloy
Lens	Safety glass lens
Colors	<div style="display: flex; flex-direction: column; gap: 5px;"> <div style="display: flex; align-items: center;"> <div style="width: 20px; height: 15px; background-color: black; margin-right: 5px;"></div> <span>RAL9004 Black</span> </div> <div style="display: flex; align-items: center;"> <div style="width: 20px; height: 15px; background-color: #808080; margin-right: 5px;"></div> <span>RAL9007 Grey Metallic</span> </div> <div style="display: flex; align-items: center;"> <div style="width: 20px; height: 15px; background-color: #e0e0e0; margin-right: 5px;"></div> <span>RAL9016 White</span> </div> <div style="display: flex; align-items: center;"> <div style="width: 20px; height: 15px; background-color: #654321; margin-right: 5px;"></div> <span>RAL8019 Dark Bronze</span> </div> </div>
Gasket	Silicone rubber gasket
Fasteners	PCS hardware
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE

## Electrical description

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Driver / Ballast	Standard. Optional DALI version available. To be specified at time of ordering.

## Additional information

Lifetime	Ta=25°/40° L90B10 > 90000h
BUG Rating	Please see individual Spec Sheets for classification of Backlight, Uplight and Glare.
Listings	ETL listed. Suitable for wet locations.

**Options**

**Light distribution**



symmetric, medium beam [M]



symmetric, narrow beam up and down [N/N]



symmetric, narrow beam [N]



asymmetric, forward throw [A60]



symmetric, medium beam up and forward throw down [M/A60]



symmetric, narrow beam up and forward-throw down [N/A60]



symmetric, narrow beam up and medium beam down [N/M]



symmetric, medium beam up and down [M/M]



asymmetric, forward throw [A60/A60]

**Color temperature**

**Nominal Watt**



3000 K



4000 K







2700 K

0 W

**Surface Mounted Wall Luminaires**

**Configurations**

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI	Weight (lb)
asymmetric, forward throw [A60/A60] 	131-9380	LED-2x6/24W / 700 mA - 2700 K	1588.1	27 W	80	10.80
	131-9381	LED-2x6/36W / 1050 mA - 2700 K	2411.6	40 W	80	10.80
	131-9382	LED-2x6/52W / 1400 mA - 2700 K	3058.6	53 W	80	10.80
asymmetric, forward throw [A60] 	131-0214	LED-6/18W / 1050 mA - 3000 K	1264.6	21 W	80	10.80
	131-0215	LED-6/18W / 1050 mA - 4000 K	1323.4	21 W	80	10.80
	131-0220	LED-6/26W / 1400 mA - 3000 K	1617.5	27 W	80	10.80
	131-0221	LED-6/26W / 1400 mA - 4000 K	1691	27 W	80	10.80
	131-9152	LED-6/12W / 700 mA - 3000 K	852.9	14.5 W	80	10.80
	131-9156	LED-6/12W / 700 mA - 4000 K	911.7	14.5 W	80	10.80
	131-9332	LED-6/12W / 700 mA - 2700 K	794	14.5 W	80	10.80
	131-9364	LED-6/18W / 1050 mA - 2700 K	1205.8	21 W	80	10.80
	131-9367	LED-6/26W / 1400 mA - 2700 K	1529.2	27 W	80	10.80
symmetric, medium beam [M] 	131-0210	LED-6/18W / 1050 mA - 3000 K	1739.1	21 W	80	10.80
	131-0211	LED-6/18W / 1050 mA - 4000 K	1820	21 W	80	10.80
	131-0216	LED-6/26W / 1400 mA - 3000 K	2224.5	27 W	80	10.80
	131-0217	LED-6/26W / 1400 mA - 4000 K	2325.6	27 W	80	10.80
	131-9153	LED-6/12W / 700 mA - 3000 K	1172.9	14.5 W	80	10.80
	131-9157	LED-6/12W / 700 mA - 4000 K	1253.8	14.5 W	80	10.80
	131-9333	LED-6/12W / 700 mA - 2700 K	1092	14.5 W	80	10.80
	131-9365	LED-6/18W / 1050 mA - 2700 K	1658.3	21 W	80	10.80
	131-9368	LED-6/26W / 1400 mA - 2700 K	2103.2	27 W	80	10.80
symmetric, medium beam up and down [M/M] 	131-9337	LED-2x6/24W / 700 mA - 2700 K	2184.4	27 W	80	10.80
	131-9372	LED-2x6/36W / 1050 mA - 2700 K	3317.1	40 W	80	10.80
	131-9377	LED-2x6/52W / 1400 mA - 2700 K	4207.1	53 W	80	10.80
	131-9926	LED-2x6/36W / 1050 mA - 3000 K	3478.9	40 W	80	10.80
	131-9931	LED-2x6/36W / 1050 mA - 4000 K	3640.7	40 W	80	10.80
	131-9936	LED-2x6/52W / 1400mA - 3000 K	4449.8	53 W	80	10.80
symmetric, medium beam up and forward throw down [M/A60] 	131-9161	LED-2x6/24W / 700 mA - 3000 K	2026.1	27 W	80	10.80
	131-9167	LED-2x6/24W / 700 mA - 4000 K	2165.8	27 W	80	10.80

**WE-EF LIGHTING USA, LLC**

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 03/06/2026

**Surface Mounted Wall Luminaires**

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI	Weight (lb)
	131-9335	LED-2x6/24W / 700 mA - 2700 K	1886.4	27 W	80	10.80
	131-9370	LED-2x6/36W / 1050 mA - 2700 K	2864.5	40 W	80	10.80
	131-9375	LED-2x6/52W / 1400 mA - 2700 K	3633	53 W	80	10.80
	131-9924	LED-2x6/36W / 1050 mA - 3000 K	3004.2	40 W	80	10.80
	131-9929	LED-2x6/36W / 1050 mA - 4000 K	3144	40 W	80	10.80
	131-9934	LED-2x6/52W / 1400mA - 3000 K	3842.6	53 W	80	10.80
	131-9939	LED-2x6/52W / 1400mA - 4000 K	4017.3	53 W	80	10.80
symmetric, narrow beam [N] 	131-0212	LED-6/18W / 1050 mA - 3000 K	1948	21 W	80	10.80
	131-0213	LED-6/18W / 1050 mA - 4000 K	2038.6	21 W	80	10.80
	131-0218	LED-6/26W / 1400 mA - 3000 K	2491.7	27 W	80	10.80
	131-0219	LED-6/26W / 1400 mA - 4000 K	2604.9	27 W	80	10.80
	131-9154	LED-6/12W / 700 mA - 3000 K	1313.8	14.5 W	80	10.80
	131-9158	LED-6/12W / 700 mA - 4000 K	1404.4	14.5 W	80	10.80
	131-9334	LED-6/12W / 700 mA - 2700 K	1223.2	14.5 W	80	10.80
	131-9366	LED-6/18W / 1050 mA - 2700 K	1857.4	21 W	80	10.80
	131-9369	LED-6/26W / 1400 mA - 2700 K	2355.8	27 W	80	10.80
	symmetric, narrow beam up and down [N/N] 	131-9165	LED-2x6/24W / 700 mA - 3000 K	2628.4	27 W	80
131-9171		LED-2x6/24W / 700 mA - 4000 K	2809.6	27 W	80	10.80
131-9339		LED-2x6/24W / 700 mA - 2700 K	2447.1	27 W	80	10.80
131-9374		LED-2x6/36W / 1050 mA - 2700 K	3716	40 W	80	10.80
131-9379		LED-2x6/52W / 1400 mA - 2700 K	4712.9	53 W	80	10.80
131-9928		LED-2x6/36W / 1050 mA - 3000 K	3897.2	40 W	80	10.80
131-9933		LED-2x6/36W / 1050 mA - 4000 K	4078.5	40 W	80	10.80
131-9938		LED-2x6/52W / 1400mA - 3000 K	4984.8	53 W	80	10.80
131-9943		LED-2x6/52W / 1400mA - 4000 K	5211.4	53 W	80	10.80
symmetric, narrow beam up and forward-throw down [N/A60] 		131-9162	LED-2x6/24W / 700 mA - 3000 K	2167.2	27 W	80
	131-9168	LED-2x6/24W / 700 mA - 4000 K	2316.6	27 W	80	10.80
	131-9336	LED-2x6/24W / 700 mA - 2700 K	2017.7	27 W	80	10.80
	131-9371	LED-2x6/36W / 1050 mA - 2700 K	3063.9	40 W	80	10.80
	131-9376	LED-2x6/52W / 1400 mA - 2700 K	3886	53 W	80	10.80
	131-9925	LED-2x6/36W / 1050 mA - 3000 K	3213.4	40 W	80	10.80
	131-9930	LED-2x6/36W / 1050 mA - 4000 K	3362.8	40 W	80	10.80
	131-9935	LED-2x6/52W / 1400mA - 3000 K	4110.1	53 W	80	10.80

**WE-EF LIGHTING USA, LLC**


410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 03/06/2026

## Surface Mounted Wall Luminaires


Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI	Weight (lb)
	131-9940	LED-2x6/52W / 1400mA - 4000 K	4297	53 W	80	10.80
symmetric, narrow beam up and medium beam down [N/M]	131-9164	LED-2x6/24W / 700 mA - 3000 K	2487.3	27 W	80	10.80
	131-9170	LED-2x6/24W / 700 mA - 4000 K	2658.8	27 W	80	10.80
	131-9338	LED-2x6/24W / 700 mA - 2700 K	2184.4	27 W	80	10.80
	131-9373	LED-2x6/36W / 1050 mA - 2700 K	3516.5	40 W	80	10.80
	131-9378	LED-2x6/52W / 1400 mA - 2700 K	4460	53 W	80	10.80
	131-9927	LED-2x6/36W / 1050 mA - 3000 K	3688.1	40 W	80	10.80
	131-9932	LED-2x6/36W / 1050 mA - 4000 K	3859.6	40 W	80	10.80
	131-9937	LED-2x6/52W / 1400mA - 3000 K	4717.3	53 W	80	10.80
	131-9942	LED-2x6/52W / 1400mA - 4000 K	4931.7	53 W	80	10.80



## Mounting Accessories

### Column fitter


Description	Part ID	C1	D1	H1	H2	M1	Weight (lb)
CF-410/420	131-9140	3.27	≥ 5.51	8.66	3.94	0.24	1.32

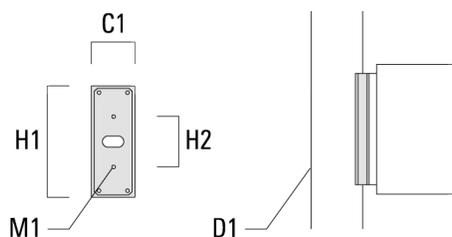

**Surface Mounted Wall Luminaires**

**Surface Collar**

Description	Part ID	A	B	C1	D1	D2	D3	M1	M2
VLS/SLS Surface Collar	131-6004	8.66	3.66	1.75	∅1	∅1.5	∅0.38	6	2

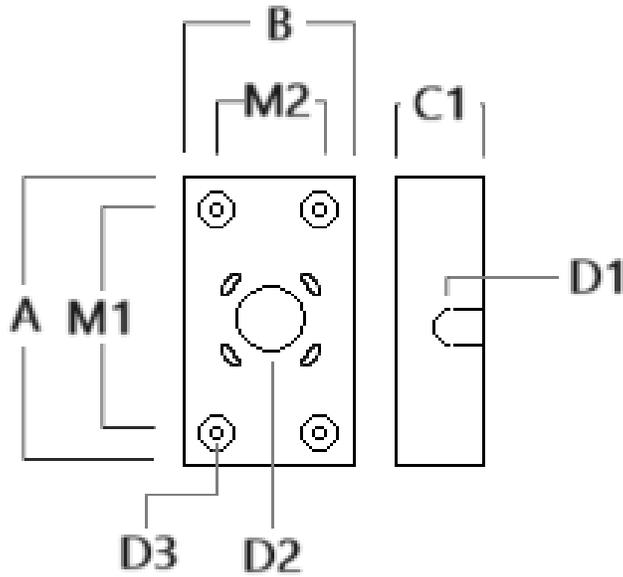

**Surface Mounted Wall Luminaires**

---

**Electrical Accessories**

**Emergency Lighting Package**

---

Description	Part ID	Additional information
_LS420/430 LED Emergency Lighting Package	131-6900	Emergency battery backup operating for a minimum 90 minutes when power is lost.

---