


## XRZ334-TE LED

### Bollards and pathway luminaires

**we-ef**

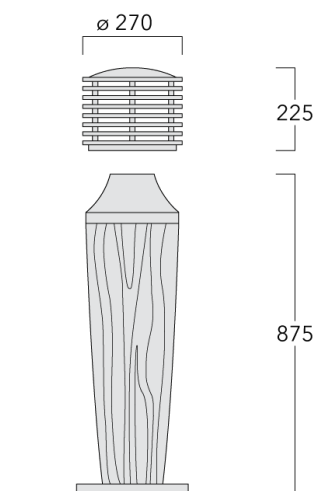

#### Description

IP66, Class I. IK10. Marine-grade, all-aluminium construction. 5CE superior corrosion protection + primer including PCS hardware. Borosilicate glass prismatic lens. Silicone rubber gaskets. Impregnated hardwood post. Integral EC electronic converter in thermally-separated compartment. Advanced thermal management protects LEDs while optimising lumens output.

#### WE-EF LIGHTING Pty Ltd

47 Tarnard Drive, 3195 Braeside, Victoria - Phone: +61 3 8587 0444 - Fax: +61 3 8587 0499  
info.australia@we-ef.com - <https://we-ef.com/aus>

Subject to technical changes and errors. - Generated on 16/08/2025

**Specifications****Material description**

|                      |                                                                                                                                          |
|----------------------|------------------------------------------------------------------------------------------------------------------------------------------|
| Body                 | Marine-grade, all-aluminium construction                                                                                                 |
| Lens                 | Borosilicate glass prismatic lens                                                                                                        |
| Colours              | <div><div></div> RAL9004 Signal black</div> <div><div></div> RAL9006 White aluminium</div> <div><div></div> RAL9007 Grey aluminium</div> |
| Gasket               | Silicone rubber gaskets                                                                                                                  |
| Fasteners            | PCS hardware                                                                                                                             |
| Ingress protection   | IP55                                                                                                                                     |
| Impact resistance    | IK10                                                                                                                                     |
| Corrosion resistance | 5CE+Primer                                                                                                                               |

**Electrical description**

|                  |                                                                     |
|------------------|---------------------------------------------------------------------|
| Driver / Ballast | Integral EC electronic converter in thermally-separated compartment |
|------------------|---------------------------------------------------------------------|

**Additional information**

## **XRZ334-TE LED**

**Bollards and pathway luminaires**

***we-ef***

### **Options**

**Light distribution   Colour temperature   Nominal Watt**

#### **WE-EF LIGHTING Pty Ltd**

47 Tarnard Drive, 3195 Braeside, Victoria - Phone: +61 3 8587 0444 - Fax: +61 3 8587 0499  
info.australia@we-ef.com - <https://we-ef.com/aus>

Subject to technical changes and errors. - Generated on 16/08/2025

## XRZ334-TE LED

Bollards and pathway luminaires

**we-ef**

### Configurations

| Light distribution | Part ID | Light source | Rated lumens | Rated input power | CRI | Weight (kg) |
|--------------------|---------|--------------|--------------|-------------------|-----|-------------|
|--------------------|---------|--------------|--------------|-------------------|-----|-------------|

#### WE-EF LIGHTING Pty Ltd

47 Tarnard Drive, 3195 Braeside, Victoria - Phone: +61 3 8587 0444 - Fax: +61 3 8587 0499

info.australia@we-ef.com - <https://we-ef.com/aus>

Subject to technical changes and errors. - Generated on 16/08/2025

Mounting Accessories

Planted root

| Description       | Part ID     | D1  | D2  | D3  | D4  | H1  | H2  | M1 | T1  | T2       | Weight (kg) |
|-------------------|-------------|-----|-----|-----|-----|-----|-----|----|-----|----------|-------------|
| Planted root ESV4 | 300-0586-AP | 305 | 285 | 106 | 114 | 400 | 350 | 8  | 200 | 50 x 100 | 5.90        |

