

### Description

Low-glare, diffused steplight.

ADA (American Disabilities Act) Compliant.

IP66. Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Powdercoat Finish. Silicone CCG® Controlled Compression Gasket. Opal polycarbonate main lens. Two cable entries. 0-10V Dimming comes standard with luminaire.

Pre-installation blackout is recommended for mounting in concrete, available on request.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)  
+ XXX-XXXX (Accessory 1)

**Recessed Wall Luminaires**

---

**Specifications****Material description**

---

|                    |   |
|--------------------|---|
| Body               | Marine-grade die-cast aluminium alloy   |
| Colors             |  RAL9004 Black         |
|                    |  RAL9007 Grey Metallic |
|                    |  RAL9016 White         |
|                    |  RAL8019 Dark Bronze   |
| Ingress protection | IP66  |
| Impact resistance  | IK07  |

---

**Electrical description**

---

|                  |   |
|------------------|---|
| Power supply     | Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order. |
| Driver / Ballast | Integral EC electronic converter  |

---

**Additional information**

---

|          |   |
|----------|---|
| Lifetime | Ta=25°/40° L80B10 > 54000h              |
| Listings | ETL listed. Suitable for wet locations. |

---

**Recessed Wall Luminaires**

---

**Options**

**Light distribution**



diffused distribution

**Color temperature**



3000 K



4000 K




2700 K

**Nominal Watt**

0 W


**Recessed Wall Luminaires****Configurations**

| Light distribution  | Part ID  | Light source             | Delivered lumens | Rated input power | CRI | Weight (lb) |
|---|----------|--------------------------|------------------|-------------------|-----|-------------|
| diffused distribution<br> | 190-9002 | LED-5W / 250 mA - 3000 K | 78.6             | 5.6 W             | 80  | 1.98        |
|   | 190-9003 | LED-5W / 250 mA - 4000 K | 81.7             | 5.6 W             | 80  | 1.98        |
|   | 190-9035 | LED-5W / 250 mA - 2700 K | 75.4             | 5.6 W             | 80  | 1.98        |

**Mounting Accessories**

**Installation blackout**

| Description                           | Part ID  | C1   | C2   | D1    | D2    | D3 | H1   | H2   | H3 | Weight (lb) |
|---------------------------------------|----------|------|------|-------|-------|----|------|------|----|-------------|
| Installation blackout BST13-I (Proud) | 190-9030 | 5.12 | 0.47 | 10.63 | 13.31 |    | 2.56 | 4.21 |    | 1.98        |

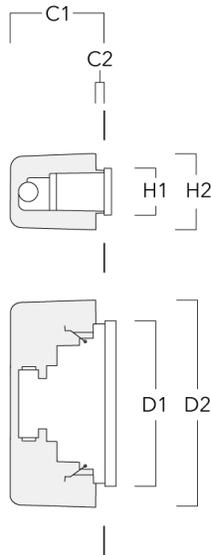

|  |          |      |      |       |       |       |      |      |      |      |
|--|----------|------|------|-------|-------|-------|------|------|------|------|
| Installation blackout BST13-II (Flush) | 190-9031 | 5.71 | 0.87 | 10.63 | 11.02 | 13.31 | 2.56 | 2.95 | 4.21 | 1.98 |
|--|----------|------|------|-------|-------|-------|------|------|------|------|

