

Description

Low-glare, diffused steplight.

ADA (American Disabilities Act) Compliant.

IP66. Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Powdercoat Finish. Silicone CCG® Controlled Compression Gasket. Opal polycarbonate main lens. Two cable entries. 0-10V Dimming comes standard with luminaire.

Pre-installation blackout is recommended for mounting in concrete, available on request.

Specify product with 7 Digit product code – Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.





Example: XXX-XXXX-9004 (Black)
+ XXX-XXXX (Accessory 1)

Recessed Wall Luminaires

Specifications

Material description

Body	Marine-grade die-cast aluminium alloy
------	---------------------------------------

Colors	 RAL9004 Black
	 RAL9007 Grey Metallic
	 RAL9016 White
	 RAL8019 Dark Bronze

Ingress protection	IP66
--------------------	------

Impact resistance	IK07
-------------------	------

Electrical description

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
--------------	---

Driver / Ballast	Integral EC electronic converter
------------------	----------------------------------

Additional information

Lifetime	Ta=25°/40° L80B10 > 54000h
----------	----------------------------





Listings	ETL listed. Suitable for wet locations.
----------	---

STO134 LED

Recessed Wall Luminaires



Options

Light distribution	Color temperature	Nominal Watt
 diffused distribution	 3000 K	0 W
	 4000 K	
	 2700 K	

WE-EF LIGHTING USA, LLC


410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030
customersupport.usa@we-ef.com - <https://we-ef.com/us>
Subject to technical changes and errors. - Generated on 08/14/2025

STO134 LED



Recessed Wall Luminaires

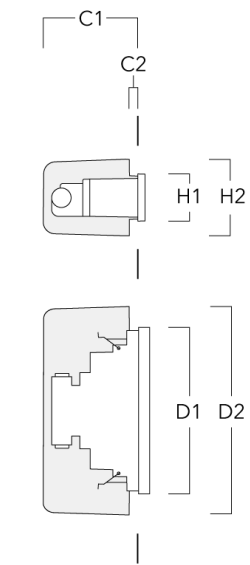
Configurations

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI	Weight (lb)
diffused distribution 	190-9002	LED-5W / 250 mA - 3000 K	78.6	5.6 W	80	1.98
	190-9003	LED-5W / 250 mA - 4000 K	81.7	5.6 W	80	1.98
	190-9035	LED-5W / 250 mA - 2700 K	75.4	5.6 W	80	1.98

Mounting Accessories

Installation blackout

Description	Part ID	C1	C2	D1	D2	D3	H1	H2	H3	Weight (lb)
Installation blackout BST13-I (Proud)	190-9030	5.12	0.47	10.63	13.31		2.56	4.21		1.98



Installation blackout BST13-II (Flush)	190-9031	5.71	0.87	10.63	11.02	13.31	2.56	2.95	4.21	1.98
--	----------	------	------	-------	-------	-------	------	------	------	------

