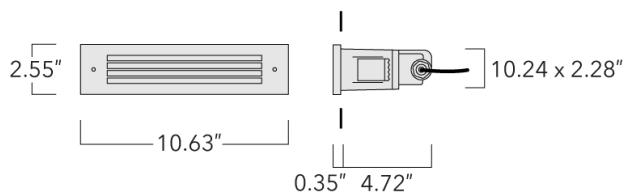


Recessed Wall Luminaires**Description**

Louvred Steplight.

ADA (American Disabilities Act) Compliant.

IP66. Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Opal polycarbonate main lens. Two cable entries. 0-10V Dimming comes standard with luminaire.

A pre-installation blockout is available and recommended for mounting in concrete walls; to be ordered separately.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)
+ XXX-XXXX (Accessory 1)

Recessed Wall Luminaires**Specifications****Material description**

Body	Marine-grade, die-cast aluminium alloy
Colors	 RAL9004 Black  RAL9007 Grey Metallic  RAL9016 White  RAL8019 Dark Bronze
Gasket	Silicone rubber gasket
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE

Electrical description


Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Driver / Ballast	Integral EC electronic converter

Additional information

Lifetime	Ta=25°/40° L80B10 > 54000h
Listings	ETL listed. Suitable for wet locations.

Recessed Wall Luminaires**Options****Light distribution Color temperature Nominal Watt**

Shielded



3000 K

4000 K

2700 K

0 W

Recessed Wall Luminaires**Configurations**


Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI	Weight (lb)
Shielded	190-9005	LED-6W / 350 mA - 3000 K	25.2	8 W	80	1.98
	190-9006	LED-6W / 350 mA - 4000 K	26.6	8 W	80	1.98
	190-9036	LED-6W / 350 mA - 2700 K	23.8	8 W	80	1.98

Recessed Wall Luminaires

Mounting Accessories

Installation breakout

Description	Part ID	C1	C2	D1	D2	D3	H1	H2	H3	Weight (lb)
Installation breakout BST13-I (Proud)	190-9030	5.12	0.47	10.63	13.31		2.56	4.21		1.98

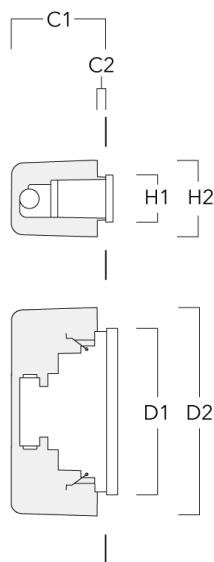

Installation breakout BST13-II (Flush)	190-9031	5.71	0.87	10.63	11.02	13.31	2.56	2.95	4.21	1.98
--	----------	------	------	-------	-------	-------	------	------	------	------

