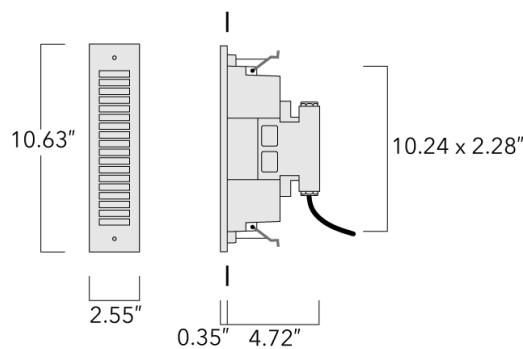


**Recessed Wall Luminaires****Description**

Vertically oriented louvred steplight.

ADA (American Disabilities Act) Compliant.

IP66. Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Polycarbonate main lens. Two cable entries. Integral driver. Factory-installed LED circuit board. 0-10V Dimming comes standard with luminaire.

Pre-installation blockout is recommended for mounting in concrete, available on request.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)  
+ XXX-XXXX (Accessory 1)

**Recessed Wall Luminaires****Specifications****Material description**

---

Body	Marine-grade, die-cast aluminium alloy
Lens	Polycarbonate
Colors	 RAL9004 Black  RAL9007 Grey Metallic  RAL9016 White  RAL8019 Dark Bronze
Gasket	Silicone rubber gasket
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE

---

**Electrical description**

---

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Driver / Ballast	Integral EC electronic converter
Surge protection	In-line bracket 10kV Surge Protector

---

**Additional information**

---

Lifetime	Ta=25°/40° L80B10 > 54000h
Listings	ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations.

---

**Recessed Wall Luminaires****Options****Light distribution    Color temperature    Nominal Watt**

Shielded



4000 K

3000 K

2700 K

0 W

**Recessed Wall Luminaires****Configurations**


Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI	Weight (lb)
Shielded	190-9017	LED-6W / 350 mA - 3000 K	18.7	8 W	80	1.98
	190-9018	LED-6W / 350 mA - 4000 K	19.8	8 W	80	1.98
	190-9040	LED-6W / 350 mA - 2700 K	17.6	8 W	80	1.98

## Recessed Wall Luminaires

## Mounting Accessories

## Installation breakout

Description	Part ID	C1	C2	D1	D2	D3	H1	H2	H3	Weight (lb)
Installation breakout BST13-II (Flush)	190-9031	5.71	0.87	10.63	11.02	13.31	2.56	2.95	4.21	1.98

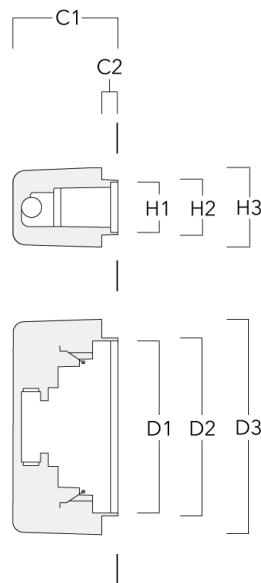

Installation breakout BST13-I	190-9030	5.12	0.47	10.63	13.31	2.56	4.21	1.98
-------------------------------	----------	------	------	-------	-------	------	------	------

