

Recessed Wall Luminaires



Description

Vertically oriented louvered steplight.


ADA (American Disabilities Act) Compliant.

IP66. Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Polycarbonate main lens. Two cable entries. Integral driver. Factory-installed LED circuit board. 0-10V Dimming comes standard with luminaire.

Pre-installation blackout is recommended for mounting in concrete, available on request.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)  
+ XXX-XXXX (Accessory 1)

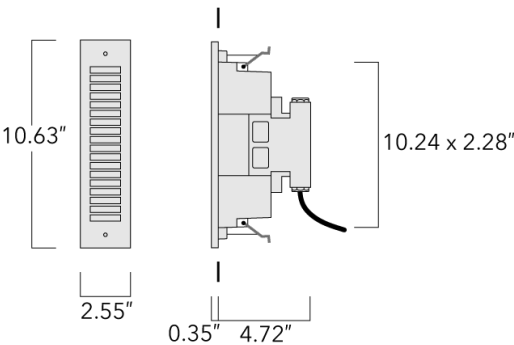

Recessed Wall Luminaires

Specifications  
Material description

|                      |   |
|----------------------|---|
| Body                 | Marine-grade, die-cast aluminium alloy  |
| Lens                 | Polycarbonate   |
| Colors               | <div><div></div> RAL9004 Black</div> <div><div></div> RAL9007 Grey Metallic</div> <div><div></div> RAL9016 White</div> <div><div></div> RAL8019 Dark Bronze</div> |
| Gasket               | Silicone rubber gasket  |
| Ingress protection   | IP66  |
| Impact resistance    | IK07  |
| Corrosion resistance | 5CE   |

Electrical description





|                  |   |
|------------------|---|
| Power supply     | Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order. |
| Driver / Ballast | Integral EC electronic converter  |
| Surge protection | In-line bracket 10kV Surge Protector  |

Additional information

|          |  |
|----------|--|
| Lifetime | Ta=25°/40° L80B10 > 54000h                                 |
| Listings | ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations. |


Recessed Wall Luminaires

Options

| Light distribution  | Color temperature  | Nominal Watt |
|---|--|--------------|
|  Shielded |  4000 K | 0 W          |
|   |  3000 K |              |
|   |  2700 K |              |

Recessed Wall Luminaires


Configurations

| Light distribution   | Part ID  | Light source             | Delivered lumens | Rated input power | CRI | Weight (lb) |
|--|----------|--------------------------|------------------|-------------------|-----|-------------|
| <div>Shielded</div>  | 190-9017 | LED-6W / 350 mA - 3000 K | 18.7             | 8 W               | 80  | 1.98        |
|  | 190-9018 | LED-6W / 350 mA - 4000 K | 19.8             | 8 W               | 80  | 1.98        |
|  | 190-9040 | LED-6W / 350 mA - 2700 K | 17.6             | 8 W               | 80  | 1.98        |

Mounting Accessories

Installation blackout

| Description                            | Part ID  | C1   | C2   | D1    | D2    | D3    | H1   | H2   | H3   | Weight (lb) |
|--|----------|------|------|-------|-------|-------|------|------|------|-------------|
| Installation blackout BST13-II (Flush) | 190-9031 | 5.71 | 0.87 | 10.63 | 11.02 | 13.31 | 2.56 | 2.95 | 4.21 | 1.98        |

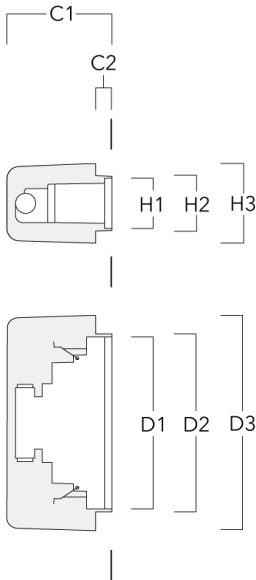

|                               |          |      |      |       |       |  |      |      |  |      |
|-------------------------------|----------|------|------|-------|-------|--|------|------|--|------|
| Installation blackout BST13-I | 190-9030 | 5.12 | 0.47 | 10.63 | 13.31 |  | 2.56 | 4.21 |  | 1.98 |
|-------------------------------|----------|------|------|-------|-------|--|------|------|--|------|

