

KTY234 LED II

Bollards and Pathway Luminaires

we-ef



WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030


customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 10/23/2024

KTY234 LED II

Bollards and Pathway Luminaires

we-ef

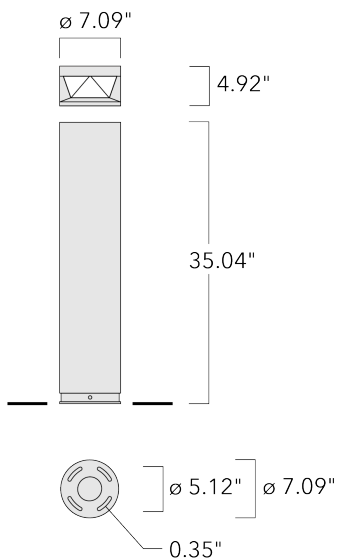

Description

IP66. Class I. IK10. Marine-grade, all aluminum construction. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Polycarbonate lens, CAD-optimized indirect optics for superior illumination and glare control. Integral driver in thermally separated compartment. Factory-installed LED circuit board. 0-10V Dimming comes standard with luminaire.

Luminaire spacing up to 35 ft; ideal for pathway lighting applications.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)
+ XXX-XXXX (Accessory 1)





WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 10/23/2024

Bollards and Pathway Luminaires**Specifications****Material description**

Body	Marine-grade all-aluminum construction
Lens	Polycarbonate
Colors	 RAL9004 Black  RAL9007 Grey Metallic  RAL9016 White  RAL8019 Dark Bronze
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP66
Impact resistance	IK10
Corrosion resistance	5CE

Electrical description

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Driver / Ballast	Integral EC electronic converter
Surge protection	Integral 10kV Surge Protector

Additional information

Lifetime	Ta=25°/40° L90B10 > 90000h
Lead Time	This is a new product release and may have an extended lead time.
BUG Rating	Please see individual Spec Sheets for classification of Backlight, Uplight and Glare.
Listings	ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations.

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 10/23/2024

KTY234 LED II

Bollards and Pathway Luminaires



Options

Light distribution



symmetric distribution [C60]



rectangular, side throw [R65]




asymmetric, forward-throw, one-sided

Blank Head [BLANK]

Color temperature



3000 K



4000 K



2700 K

NA

Nominal Watt

0 W




WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 10/23/2024

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (lb)
Blank Head [BLANK]	117-6207	BLANK Head			NA	
asymmetric, forward-throw, one-sided 	114-9091+114-9185	LED-6/18W / 1050 mA - 3000 K	450.4	21 W	80	19.80
	114-9092+114-9185	LED-6/18W / 1050 mA - 4000 K	471.3	21 W	80	19.80
	114-9093+114-9185	LED-6/26W / 1400 mA - 3000 K	576.1	29 W	80	19.80
	114-9094+114-9185	LED-6/26W / 1400 mA - 4000 K	602.3	29 W	80	19.80
rectangular, side throw [R65] 	114-9085	LED-3/9W / 1050 mA - 3000 K	519.7	11 W	80	19.80
	114-9086	LED-3/9W / 1050 mA - 4000 K	543.9	11 W	80	19.80
	114-9087	LED-3/13W / 1400 mA - 3000 K	664.7	15.8 W	80	19.80
	114-9088	LED-3/13W / 1400 mA - 4000 K	694.9	15.8 W	80	19.80
	114-9095	LED-3/9W / 1050 mA - 2700 K	495.5	11 W	80	19.80
	114-9096	LED-3/13W / 1400 mA - 2700 K	628.5	15.8 W	80	19.80
symmetric distribution [C60] 	114-9091	LED-6/18W / 1050 mA - 3000 K	825	21 W	80	19.80
	114-9092	LED-6/18W / 1050 mA - 4000 K	863.4	21 W	80	19.80
	114-9093	LED-6/26W / 1400 mA - 3000 K	1055.3	29 W	80	19.80
	114-9094	LED-6/26W / 1400 mA - 4000 K	1103.3	29 W	80	19.80
	114-9192	LED-6/18W / 1050 mA - 2700 K	786.7	21 W	80	19.80
	114-9193	LED-6/26W / 1400 mA - 2700 K	997.7	29 W	80	19.80

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030


customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 10/23/2024

Mounting Accessories

Planted root


Description	Part ID	D1	D2	D3	D4	H1	H2	M1	Weight (lb)
Planted root ESV4	300-0461	5.71	5.12	4.01	4.25	15.75	13.78	.31	15.50

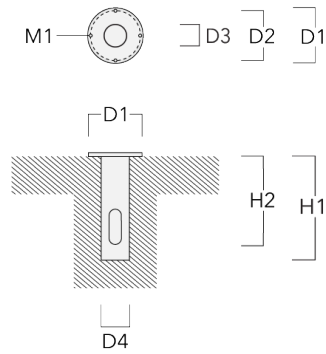

Optical Accessories

Light shield

Description	Part ID	H1	Weight (lb)
LS180 KTY (factory installed)	114-9185	2.59	0.04

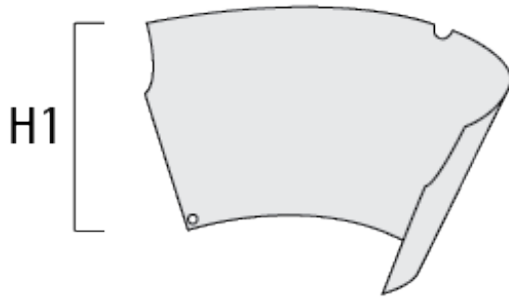

KTY234 LED II

Bollards and Pathway Luminaires

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086

Phone: +1 724 742 0030

customersupport.usa@we-ef.com

<https://we-ef.com/us>

Subject to technical changes and errors.

Generated on 10/23/2024