

### Description





IP66. Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Safety glass lens. Silicone CCG® Controlled Compression Gasket.

Integral EC electronic converter in thermally-separated compartment. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept.

For 2200 K version available on request, except [EES] distribution.

**Specifications****Material description**

---

Body	Marine-grade, die-cast aluminium alloy
Lens	Safety glass lens
Colours	 RAL9004 Signal black  RAL9007 Grey aluminium  RAL7016 Anthracite grey  RAL9016 Traffic white
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE
Windage	0.054 m <sup>2</sup>

---

**Electrical description**

---

Power supply	220-240V / 50-60 Hz
Driver / Ballast	Integral EC electronic converter in thermally-separated compartment
Power factor	> 0.9

---

**Additional information**

---

Lifetime	Ta=25° L90B10 > 90000h
----------	------------------------

---

### Options

#### Light distribution



symmetric, medium beam [M]



symmetric, narrow beam [E]



symmetric, very narrow beam [EE]



symmetric, wide beam [B]



linear spread, very narrow beam [EE]



wallwash



symmetric, very narrow beam, sharp cut-off [EES]


#### Colour temperature



3000 K



4000 K



2700 K

#### Nominal Watt





0 W




36 W

48 W

72 W

### Configurations


Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
linear spread, very narrow beam [EE] 	139-1834+139-1849	LED-12/24W / 700 mA - 3000 K	2973.9	27 W	80	7.60
	139-1835+139-1849	LED-12/24W / 700 mA - 4000 K	3179	27 W	80	7.60
	139-1840+139-1849	LED-12/36W / 1050 mA - 3000 K	4409.6	41 W	80	7.60
	139-1841+139-1849	LED-12/36W / 1050 mA - 4000 K	4614.7	41 W	80	7.60
	139-1846+139-1849	LED-12/52W / 1400 mA - 3000 K	5425.3	55 W	80	7.60
	139-1847+139-1849	LED-12/52W / 1400 mA - 4000 K	5671.9	55 W	80	7.60
	139-2077+139-1849	LED-12/36W / 1050 mA - 2700 K	4204.5	41 W	80	7.60
	139-2191+139-1849	LED-12/52W / 1400 mA - 2700 K	5129.4	55 W	80	7.60
139-2263+139-1849	LED-12/24W / 700 mA - 2700 K	4971.9	54 W	80	7.60	
symmetric, medium beam [M] 	139-1830	LED-12/24W / 700 mA - 3000 K	3152.3	27 W	80	7.60
	139-1831	LED-12/24W / 700 mA - 4000 K	3369.7	27 W	80	7.60
	139-1836	LED-12/36W / 1050 mA - 3000 K	4674.1	41 W	80	7.60
	139-1837	LED-12/36W / 1050 mA - 4000 K	4891.5	41 W	80	7.60
	139-1842	LED-12/52W / 1400 mA - 3000 K	5748.8	55 W	80	7.60
	139-1843	LED-12/52W / 1400 mA - 4000 K	6010.1	55 W	80	7.60
	139-2108	LED-12/52W / 1400 mA - 2700 K	5435.2	55 W	80	7.60
	139-2151	LED-12/24W / 700 mA - 2700 K	2934.9	27 W	80	7.60
	139-2240	LED-12/36W / 1050 mA - 2700 K	4456.7	41 W	80	7.60
symmetric, narrow beam [E] 	139-1832	LED-12/24W / 700 mA - 3000 K	2965.5	27 W	80	7.60
	139-1833	LED-12/24W / 700 mA - 4000 K	3170	27 W	80	7.60
	139-1838	LED-12/36W / 1050 mA - 3000 K	4397.1	41 W	80	7.60
	139-1839	LED-12/36W / 1050 mA - 4000 K	4601.7	41 W	80	7.60
	139-1844	LED-12/52W / 1400 mA - 3000 K	5412.2	55 W	80	7.60
	139-1845	LED-12/52W / 1400 mA - 4000 K	5658.2	55 W	80	7.60
	139-2079	LED-12/36W / 1050 mA - 2700 K	4192.6	41 W	80	7.60
	139-2079+139-1849	LED-12/36W / 1050 mA - 2700 K	4192.6	41 W	80	7.60
	139-2214	LED-12/52W / 1400 mA - 2700 K	5117	55 W	80	7.60
	139-2242	LED-12/24W / 700 mA - 2700 K	2761	27 W	80	7.60
	symmetric, very narrow beam [EE] 	139-1834	LED-12/24W / 700 mA - 3000 K	3120.5	27 W	80
139-1835		LED-12/24W / 700 mA - 4000 K	3335.7	27 W	80	7.60
139-1840		LED-12/36W / 1050 mA - 3000 K	4627	41 W	80	7.60
139-1841		LED-12/36W / 1050 mA - 4000 K	4842.2	41 W	80	7.60
139-1846		LED-12/52W / 1400 mA - 3000 K	5800	55 W	80	7.60
139-1847		LED-12/52W / 1400 mA - 4000 K	6063.7	55 W	80	7.60
139-2077		LED-12/36W / 1050 mA - 2700 K	4411.8	41 W	80	7.60

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)	
symmetric, very narrow beam, sharp cut-off [EES] 	139-2191	LED-12/52W / 1400 mA - 2700 K	5483.7	55 W	80	7.60	
	139-2263	LED-12/24W / 700 mA - 2700 K	2905.3	27 W	80	7.60	
	139-3125	LED-24/36W / 500 mA - 2700K	3249.5	39 W	80	7.60	
	139-3126	LED-24/36W / 500 mA - 3000 K	3473.6	39 W	80	7.60	
	139-3127	LED-24/36W / 500 mA - 4000 K	3473.6	39 W	80	7.60	
	139-3129	LED-24/48W / 700 mA - 2700 K	4257.9	54 W	80	7.60	
	139-3130	LED-24/48W / 700 mA - 3000 K	4594.1	54 W	80	7.60	
	139-3131	LED-24/48W / 700 mA - 4000 K	4594.1	54 W	80	7.60	
	139-3133	LED-24/72W / 1050 mA - 2700 K	4257.9	81 W	80	7.60	
	139-3134	LED-24/72W / 1050 mA - 3000 K	4594.1	81 W	80	7.60	
	139-3135	LED-24/72W / 1050 mA - 4000 K	4594.1	81 W	80	7.60	
	symmetric, wide beam [B] 	139-1907	LED-12/24W / 700 mA - 3000 K	2990.7	27 W	80	7.60
		139-1908	LED-12/24W / 700 mA - 4000 K	3197	27 W	80	7.60
139-1909		LED-12/36W / 1050 mA - 3000 K	4434.5	41 W	80	7.60	
139-1910		LED-12/36W / 1050 mA - 4000 K	4640.7	41 W	80	7.60	
139-1911		LED-12/52W / 1400 mA - 3000 K	5480.4	55 W	80	7.60	
139-1912		LED-12/52W / 1400 mA - 4000 K	5729.5	55 W	80	7.60	
139-2226		LED-12/52W / 1400 mA - 2700 K	5181.4	55 W	80	7.60	
139-2239		LED-12/36W / 1050 mA - 2700 K	4228.2	41 W	80	7.60	
139-2241		LED-12/24W / 700 mA - 2700 K	2784.4	27 W	80	7.60	
wallwash 		139-1830+139-1848-AP	LED-12/24W / 700 mA - 3000 K	2617.9	27 W	80	7.60
		139-1831+139-1848-AP	LED-12/24W / 700 mA - 4000 K	2798.5	27 W	80	7.60
	139-1836+139-1848-AP	LED-12/36W / 1050 mA - 3000 K	3881.7	41 W	80	7.60	
	139-1837+139-1848-AP	LED-12/36W / 1050 mA - 4000 K	4062.3	41 W	80	7.60	
	139-1842+139-1848-AP	LED-12/52W / 1400 mA - 3000 K	4774.1	55 W	80	7.60	
	139-1843+139-1848-AP	LED-12/52W / 1400 mA - 4000 K	4991.1	55 W	80	7.60	
	139-2108+139-1848-AP	LED-12/52W / 1400 mA - 2700 K	4513.7	55 W	80	7.60	
	139-2151+139-1848-AP	LED-12/24W / 700 mA - 2700 K	2437.4	27 W	80	7.60	
	139-2240+139-1848-AP	LED-12/36W / 1050 mA - 2700 K	3701.2	41 W	80	7.60	

**Mounting Accessories**


**Short post**

Description	Part ID	D1	D2	H1	M1	Weight (kg)
Short post EM1-M16	270-9038	160	130	203	9	2.10

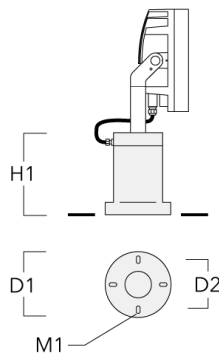


**Floodlight mounting bracket TA**

Description	Part ID	A	C1	D x L1	Weight (kg)	D x S
TA1 Mounting bracket, single (Ø 108 x 200)	147-0096		130	108 x 200	7.50	108 x 200




**Projectors**

Description	Part ID	A	C1	D × L1	Weight (kg)	D × S
TA2 Mounting bracket, double (Ø 108 x 200)	147-0097		130	108 x 200	7.50	108 x 200

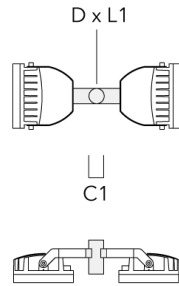


TA2-L Mounting bracket, double (Ø 108 x 200)	147-0148	±90°	420	108 x 200	20.20	108 x 200
--	----------	------	-----	-----------	-------	-----------




**Projectors**

Description	Part ID	A	C1	D x L1	Weight (kg)	D x S
TA2-L Mounting bracket, double (Ø 76 x 200)	147-0105	±90°	420	76 x 200	16.10	76 x 200




TA3 Mounting bracket, triple (Ø 89 x 200)	147-0025	±90°	650	89 x 200	17.90	89 x 200
---	----------	------	-----	----------	-------	----------

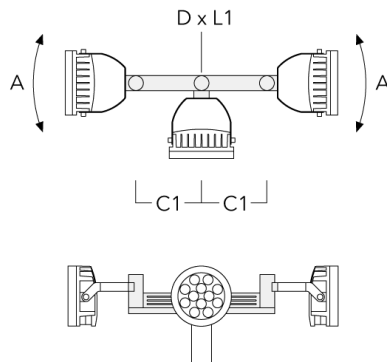




**Projectors**

Description	Part ID	A	C1	D x L1	Weight (kg)	D x S
TA3 Mounting bracket, triple (Ø 108 x 200)	147-0098	±90°	650	108 x 200	24.20	108 x 200

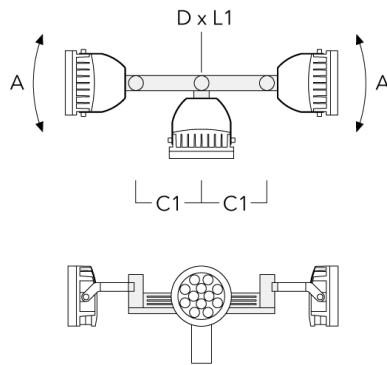


TA4 Mounting bracket, quad (Ø 89 x 200)	147-0099	±90°	650	89 x 200	20.80	89 x 200
---	----------	------	-----	----------	-------	----------

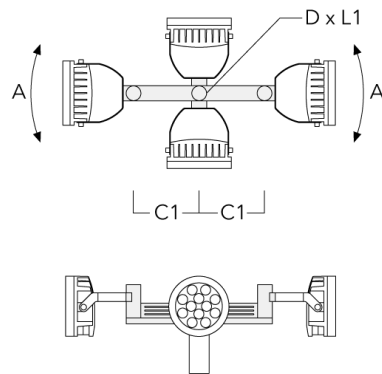


**Projectors**

Description	Part ID	A	C1	D × L1	Weight (kg)	D × S
TA4 Mounting bracket, quad (∅ 108 x 200)	147-0100	±90°	650	108 x 200	24.20	108 x 200

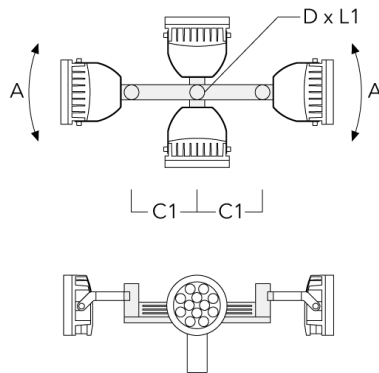


**Planted root**

Description	Part ID	D1	D2	D3	D4	H1	H2	M1	T1	T2	Weight (kg)
Planted root ESV4	300-0461-AP	150	130	60	89	400	350	8	200	50 x 100	3.85

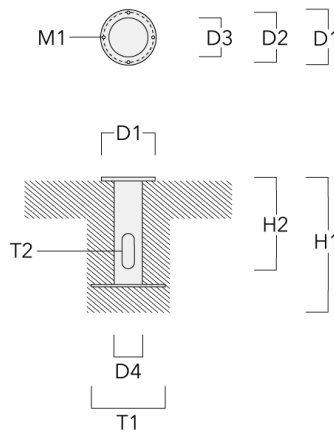


**Pole clamp**

Description	Part ID	D1	Weight (kg)	D
TS2-2/M12 Pole clamp, double (Ø 102-114)	147-0527	102-114	1.50	102-114

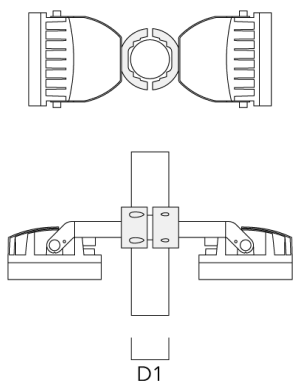


**Spigot cap**

Description	Part ID	D1	Weight (kg)
Spigot Cap KF1-M16 (ø 60 x 100)	310-9120	60 x 100	1.40




**Projectors**

Description	Part ID	D1	Weight (kg)
Spigot Cap KF1-M16 (ø 76 x 100)	310-9121	76 x 100	2.2




**Pole clamp SP - Tilttable**

Description	Part ID	D1	Weight (kg)	D
Pole clamp SP1-M16, single (Ø 76-89)	146-0242	76-89	1.30	76-89




## Projectors

Description	Part ID	D1	Weight (kg)	D
Pole clamp SP2-M16, double (Ø 76-89)	146-0244	76-89	1.50	



Pole clamp SP1-M16, single (Ø 38-60)	146-0241	38-60	1.30	
--------------------------------------	----------	-------	------	--



Pole clamp SP2-M16, double (Ø 38-60)	146-0243	38-60	1.50	
--------------------------------------	----------	-------	------	--

### WE-EF LIGHTING (Thailand) Co., Ltd.


57 Moo 5, Kingkaew Rd., Bangplee, 10540 Samutprakarn - Phone: +66 2 738 96 20 - Fax: +66 2 738 96 29

<https://we-ef.com/asia>


Subject to technical changes and errors. - Generated on 23/11/2024

**Junction box**

Description	Part ID	Additional information	A	B	C1	Weight (kg)
Junction box JB20 - Cable side entries	310-9013	Junction boxes are made from marine-grade, die-cast aluminium alloy. IK10. IP66. For side entries and suitable to be used with cable glands.	180	143	51	1.02

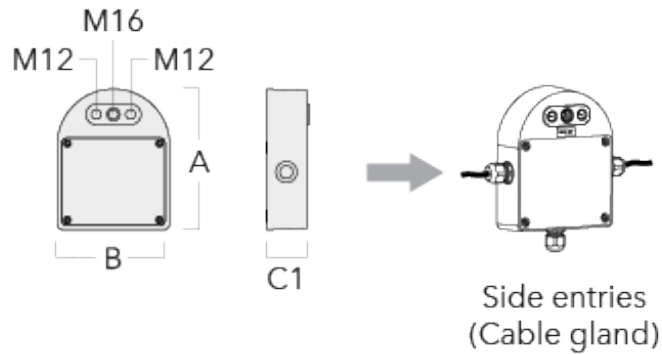


Junction box JB20 - Conduit side entries	310-9014	Junction boxes are made from marine-grade, die-cast aluminium alloy. IK10. IP66. For side entries and suitable to be used with conduits.	180	143	51	1.02
--	----------	--	-----	-----	----	------

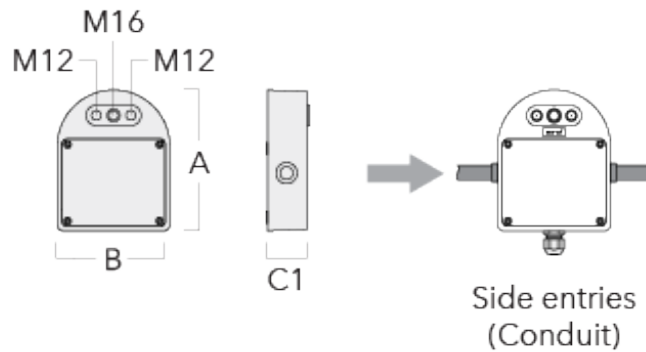


**Projectors**

Description	Part ID	Additional information	A	B	C1	Weight (kg)
Junction box JB20 - Wall entries	310-9018	Junction boxes are made from marine-grade, die-cast aluminium alloy. IK10. IP66. For wall entries.	180	143	51	1.02

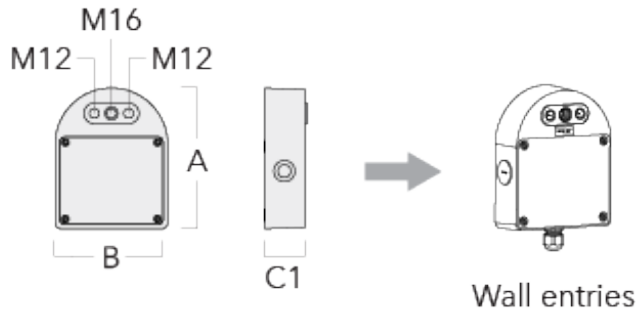



**Pole clamp PC - Rotatable**

Description	Part ID	D1	Weight (kg)
PC2 76-89/60 Pole clamp, double (Ø 76-89)	139-2703	76-89	1.00


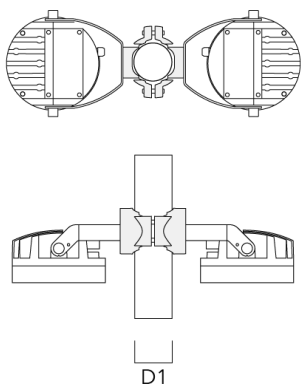


## Projectors

Description	Part ID	D1	Weight (kg)
PC1 76-89/60 Pole clamp, single (Ø 76-89)	139-2702	76-89	1.00





PC2 102-114/60 Pole clamp, double (Ø 102-114)	139-2707	102-114	1.20
---	----------	---------	------

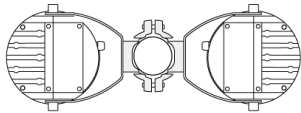





**Projectors**

Description	Part ID	D1	Weight (kg)
PC1 102-114/60 Pole clamp, single (Ø 102-114)	139-2706	102-114	1.20





PC2 114-133/60 Pole clamp, double (Ø 114-133)	139-2709	114-133	1.40
--	----------	---------	------





## Projectors

Description	Part ID	D1	Weight (kg)
PC1 114-133/60 Pole clamp, single (Ø 114-133)	139-2708	114-133	1.40



PC2 82-109/60 Pole camp, double (Ø 82-109)	139-2705	82-109	1.10
--	----------	--------	------


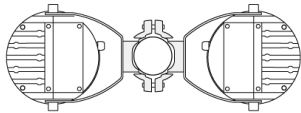


**Projectors**

---

Description	Part ID	D1	Weight (kg)
PC1 82-109/60 Pole camp, single (Ø 82-109)	139-2704	82-109	1.10

---



D1

**Control****1-10 V analogue dimming interface**

---

Description	Part ID	C
1-10 V analogue dimming interface	430-0011	90

---

---

**R2C Ready to Connect**

---

Description	Part ID
R2C Ready to Connect (top)	430-0019


---

**Optical Accessories****Linear spread lens**

---

Description	Part ID	C1
Linear spread lens IO-180	139-1849	199

---




---

**Flood lens**

---

Description	Part ID	C1
Flood lens IO-360	139-1850	199


---



**Projectors**


**Honeycomb louvre**

Description	Part ID	C1
Honeycomb louvre IW	139-1851	199




**Glare shield**

Description	Part ID	A	C1
Glare shield ES	139-1852	159	266



**Snoot**

Description	Part ID	A	C1
Snoot ET	139-1853	160	266

**Wallwash lens**

Description	Part ID	C1
Wallwash lens IO-20	139-1848-AP	199

