


VLR120 [LA10]

Wall luminaires surface mounted

we-ef

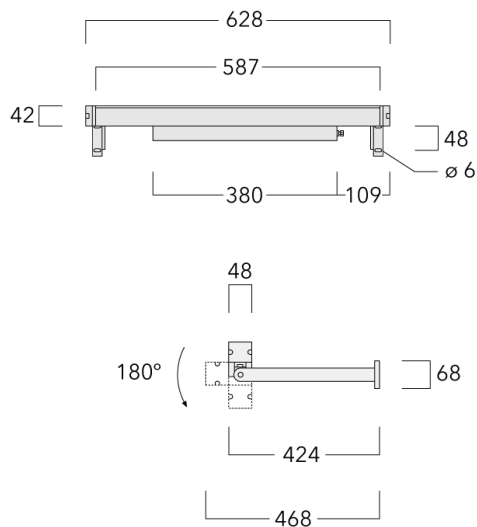

Description

IP67, Class I. IK09. Marine-grade, all aluminium construction. 5CE superior corrosion protection including PCS hardware. Silicone rubber gasket. PMMA. Linear PMMA LED lens. 1.2 m connecting cable, UV stabilized, PVC free. Luminaire is factory sealed and does not need to be opened during installation and can be tilted up to 180°. Integral LED driver with DALI interface.

Separate LED driver on request.

Fagerhult Lighting Ltd

33-34 Dolben Street, SE1 0UQ London, United Kingdom

<https://we-ef.com/uk>

Subject to technical changes and errors. - Generated on 06/09/2025

VLR120 [LA10]

we-ef

Wall luminaires surface mounted

Specifications

Material description

Body	Marine-grade, all-aluminium construction
Lens	PMMA
Colours	<div><div></div> RAL9004 Signal black</div> <div><div></div> RAL9006 White aluminium</div> <div><div></div> RAL9007 Grey aluminium</div> <div><div></div> RAL7016 Anthracite grey</div> <div><div></div> RAL9016 Traffic white</div>
Gasket	Silicone rubber gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP67
Impact resistance	IK09
Corrosion resistance	5CE

Electrical description

Power supply	220-240V / 50-60 Hz
Driver / Ballast	Integral LED driver with DALI Interface

Additional information

Lifetime	Ta=25° L90B10 > 90000h
Energy efficiency class	D (Light source)

Fagerhult Lighting Ltd

33-34 Dolben Street, SE1 0UQ London, United Kingdom

<https://we-ef.com/uk>

Subject to technical changes and errors. - Generated on 06/09/2025

VLR120 [LA10]



Wall luminaires surface mounted

Options

Light distribution



asymmetric linear, wallwash [LA10]

Colour temperature

Nominal Watt



3000 K

19 W



4000 K




2700 K

VLR120 [LA10]

we-ef

Wall luminaires surface mounted

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
asymmetric linear, wallwash [LA10] 	187-0014	LED-32/20W / 225 mA - 3000 K	2049.8	23.5 W	80	2.45
	187-0329	LED-32/20W / 225 mA - 4000 K	2049.8	23.5 W	80	2.45
	187-0549	LED-32/20W / 225 mA - 2700 K	2049.8	23.5 W	80	2.45

Fagerhult Lighting Ltd

33-34 Dolben Street, SE1 0UQ London, United Kingdom

<https://we-ef.com/uk>

Subject to technical changes and errors. - Generated on 06/09/2025