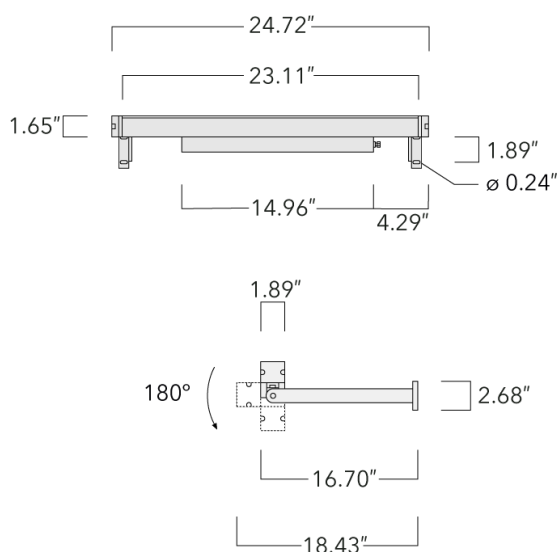


Surface Mounted Wall Luminaires

**Description**

IP67. Class I. IK09. Marine-grade, all aluminum construction. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Linear PMMA LED lens, PMMA cover. 4 ft connecting cable, UV stabilized, PVC free. Integral LED driver; separate LED driver available instead, on request at time of order. 0-10V Dimming comes standard with luminaire. Luminaire is factory-sealed and does not need to be opened during installation and can be tilted up to 180°.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)
+ XXX-XXXX (Accessory 1)

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 07/20/2025

Surface Mounted Wall Luminaires**Specifications****Material description**

| | |
|----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Body | Marine-grade, all-aluminium construction |
| Lens | PMMA |
| Colors | <div><div></div> RAL9004 Black</div> <div><div></div> RAL9007 Grey Metallic</div> <div><div></div> RAL9016 White</div> <div><div></div> RAL8019 Dark Bronze</div> |
| Fasteners | PCS Polymer Coated Stainless Steel Hardware |
| Ingress protection | IP67 |
| Impact resistance | IK09 |
| Corrosion resistance | 5CE |

Electrical description

| | |
|------------------|-----------------------------------------------------------------------------------------|
| Power supply | Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order. |
| Driver / Ballast | LED driver with DALI Interface |

Additional information

| | |
|----------|-------------------------------------------------------------------------------------------------------------------------------------------|
| Lifetime | Ta=25°/40° L90B10 > 90000h |
| Listings | ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations. Meets ANSI C136.31 - 3G Vibration Rating for Bridge and Overpass Applications. |

VLR120 [LA10]



Surface Mounted Wall Luminaires

Options

Light distribution



asymmetric linear, wallwash [LA10]

Color temperature



3000 K



4000 K



2700 K

Nominal Watt

19 W

WE-EF LIGHTING USA, LLC


410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030
customersupport.usa@we-ef.com - <https://we-ef.com/us>
Subject to technical changes and errors. - Generated on 07/20/2025

VLR120 [LA10]



Surface Mounted Wall Luminaires

Configurations

| Light distribution | Part ID | Light source | Delivered lumens | Rated input power | CRI | Weight (lb) |
|------------------------------------------------------------------------------------------------------------------------|----------|------------------------------|------------------|-------------------|-----|-------------|
| asymmetric linear, wallwash [LA10]  | 187-0014 | LED-32/20W / 225 mA - 3000 K | 2049.8 | 23.5 W | 80 | 5.40 |
| | 187-0329 | LED-32/20W / 225 mA - 4000 K | 2049.8 | 23.5 W | 80 | 5.40 |
| | 187-0549 | LED-32/20W / 225 mA - 2700 K | 2049.8 | 23.5 W | 80 | 5.40 |