


Surface Mounted Wall Luminaires

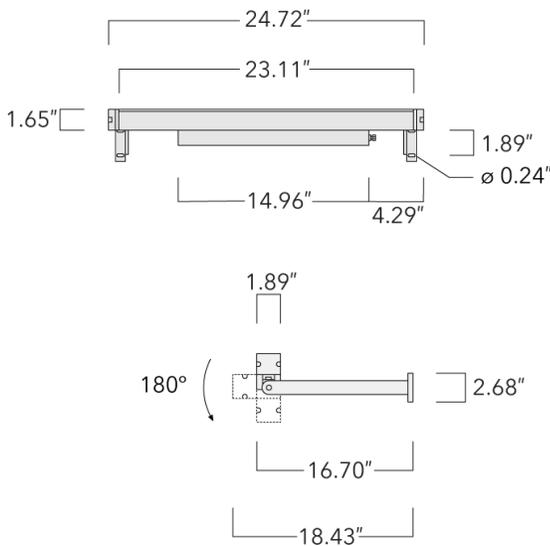

Description

IP67. Class I. IK09. Marine-grade, all aluminum construction. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Linear PMMA LED lens, PMMA cover. 4 ft connecting cable, UV stabilized, PVC free. Integral LED driver; separate LED driver available instead, on request at time of order. 0-10V Dimming comes standard with luminaire. Luminaire is factory-sealed and does not need to be opened during installation and can be tilted up to 180°.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.
 Example: XXX-XXXX-9004 (Black)
 + XXX-XXXX (Accessory 1)

Surface Mounted Wall Luminaires

Specifications

Material description

Body	Marine-grade, all-aluminium construction
Lens	PMMA
Colors	 RAL9004 Black  RAL9007 Grey Metallic  RAL9016 White  RAL8019 Dark Bronze
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP67
Impact resistance	IK09
Corrosion resistance	5CE

Electrical description

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Driver / Ballast	LED driver with DALI Interface

Additional information

Lifetime	Ta=25°/40° L90B10 > 90000h
Listings	ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations. Meets ANSI C136.31 - 3G Vibration Rating for Bridge and Overpass Applications.

Surface Mounted Wall Luminaires

Options

Light distribution



asymmetric linear, wallwash [LA10]

Color temperature



3000 K



4000 K



2700 K


Nominal Watt

19 W

VLR120 [LA10]

Surface Mounted Wall Luminaires

Configurations

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI	Weight (lb)
	187-0014	LED-32/20W / 225 mA - 3000 K	2049.8	23.5 W	80	5.40
	187-0329	LED-32/20W / 225 mA - 4000 K	2049.8	23.5 W	80	5.40
	187-0549	LED-32/20W / 225 mA - 2700 K	2049.8	23.5 W	80	5.40

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 03/17/2026