


# VLR130 [LA10]

## Wall luminaires surface mounted

**we-ef**

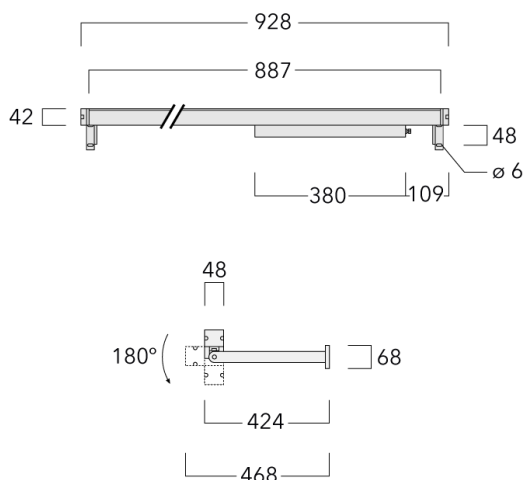

### Description

IP67, Class I. IK09. Marine-grade, all aluminium construction. 5CE superior corrosion protection including PCS hardware. Silicone rubber gasket. PMMA. Linear PMMA LED lens. 1.2 m connecting cable, UV stabilized, PVC free. Luminaire is factory sealed and does not need to be opened during installation and can be tilted up to 180°. Integral LED driver with DALI interface.

Separate LED driver on request.

### Fagerhult Lighting Ltd

33-34 Dolben Street, SE1 0UQ London, United Kingdom

<https://we-ef.com/uk>

Subject to technical changes and errors. - Generated on 18/07/2025

# VLR130 [LA10]

**we-ef**

## Wall luminaires surface mounted

### Specifications

#### Material description

|                      |  |
|----------------------|--|
| Body                 | Marine-grade, all-aluminium construction   |
| Lens                 | PMMA   |
| Colours              | <div><div></div> RAL9004 Signal black</div> <div><div></div> RAL9006 White aluminium</div> <div><div></div> RAL9007 Grey aluminium</div> <div><div></div> RAL7016 Anthracite grey</div> <div><div></div> RAL9016 Traffic white</div> |
| Gasket               | Silicone rubber gasket   |
| Fasteners            | PCS Polymer Coated Stainless Steel Hardware  |
| Ingress protection   | IP67   |
| Impact resistance    | IK09   |
| Corrosion resistance | 5CE  |

#### Electrical description

|                  |   |
|------------------|---|
| Power supply     | 220-240V / 50-60 Hz                     |
| Driver / Ballast | Integral LED driver with DALI Interface |

#### Additional information

|                         |                        |
|-------------------------|------------------------|
| Lifetime                | Ta=25° L90B10 > 90000h |
| Energy efficiency class | D (Light source)       |

#### Fagerhult Lighting Ltd

33-34 Dolben Street, SE1 0UQ London, United Kingdom

<https://we-ef.com/uk>

Subject to technical changes and errors. - Generated on 18/07/2025

VLR130 [LA10]



Wall luminaires surface mounted

Options

Light distribution



asymmetric linear, wallwash [LA10]

Colour temperature



3000 K



4000 K



2700 K

Nominal Watt


27 W

# VLR130 [LA10]

**we-ef**

Wall luminaires surface mounted

## Configurations

| Light distribution   | Part ID  | Light source                 | Rated lumens | Rated input power | CRI | Weight (kg) |
|--|----------|------------------------------|--------------|-------------------|-----|-------------|
| asymmetric linear, wallwash [LA10]<br> | 187-0015 | LED-48/30W / 225 mA - 3000 K | 3074.8       | 33.5 W            | 80  | 3.25        |
|  | 187-0330 | LED-48/30W / 225 mA - 4000 K | 3074.8       | 33.5 W            | 80  | 3.25        |
|  | 187-0550 | LED-48/30W / 225 mA - 2700 K | 3074.8       | 33.5 W            | 80  | 3.25        |

### Fagerhult Lighting Ltd

33-34 Dolben Street, SE1 0UQ London, United Kingdom

<https://we-ef.com/uk>

Subject to technical changes and errors. - Generated on 18/07/2025