


# VLR130 [LA10]

## Wall luminaires surface mounted

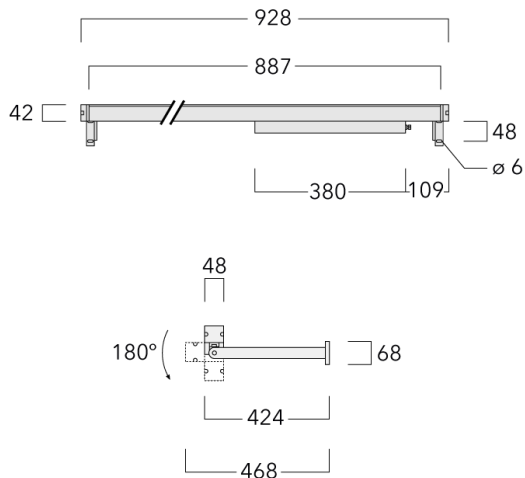

### Description

IP66/IP67. IK09. Marine-grade, all-aluminium construction. 5CE superior corrosion protection including PCS hardware. PMMA lens. Silicone rubber gaskets. 1.2 m of flexible PVC-free cable. Luminaire is factory-sealed and does not need to be opened during installation.

Integral EC electronic converter in thermally-separated compartment. Advanced thermal management protects LEDs while optimising lumens output. Removable LED boards for upgrading. DALI interface.





# VLR130 [LA10]

## Wall luminaires surface mounted

### Specifications

#### Material description

---

Body	Marine-grade, all-aluminium construction
Lens	PMMA lens
Colours	 RAL9004 Signal black  RAL9007 Grey aluminium  RAL7016 Anthracite grey  RAL9016 Traffic white
Gasket	Silicone rubber gaskets
Fasteners	PCS hardware
Ingress protection	IP66/IP67
Impact resistance	IK09
Corrosion resistance	5CE

---

#### Electrical description

---

Power supply	220-240V / 50-60 Hz
Driver / Ballast	Integral electronic DALI converter in thermally-separated compartment

---

#### Additional information

---

Lifetime	Ta=25° L90B10 > 90000h
----------	------------------------

---

# VLR130 [LA10]

Wall luminaires surface mounted

## Options

### Light distribution



asymmetric linear, wallwash [LA10]

### Colour temperature



3000 K



4000 K



2700 K


### Nominal Watt

27 W

# VLR130 [LA10]

Wall luminaires surface mounted

## Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
asymmetric linear, wallwash [LA10] 	187-0015	LED-48/30W / 225 mA - 3000 K	3074.8	33.5 W	80	3.25
	187-0330	LED-48/30W / 225 mA - 4000 K	3074.8	33.5 W	80	3.25
	187-0550	LED-48/30W / 225 mA - 2700 K	3074.8	33.5 W	80	3.25

**VLR130 [LA10]**

**Wall luminaires surface mounted**

**WE-EF LIGHTING (Thailand) Co., Ltd.**

57 Moo 5, Kingkaew Rd., Bangplee, 10540 Samutprakarn

Phone: +66 2 738 96 20

Fax: +66 2 738 96 29

<https://we-ef.com/asia>

Subject to technical changes and errors.

Generated on 23/10/2024