**Description**






IP66, Class I. Class II on request. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® gasket. Safety glass lens. Two cable entries. Integral EC electronic converter in thermally separated compartment. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. Factory installed LED circuit board. The luminaire is factory-sealed and does not need to be opened during the installation. Optional 2200 K version available. To be specified at time of ordering.

Suitable for mounting up to max. 40 mm ceiling thickness. A pre-installation blockout, proud or flush, is available and recommended for mounting in concrete ceilings. To be ordered separately.

The luminaire is not suitable for chlorine containing environments e.g. swimming pool. Special version suitable for chlorine containing environments, on request. Must be specified at time of ordering.

**Ceiling luminaires****Specifications****Material description**

---

Body	Marine-grade, die-cast aluminium alloy
Lens	Safety glass lens
Colours	 RAL9004 Signal black  RAL9006 White aluminium  RAL9007 Grey aluminium  RAL7016 Anthracite grey  RAL9016 Traffic white
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE

---

**Electrical description**

---

Power supply	220-240V / 50-60 Hz
Driver / Ballast	Standard. Optional DALI version available. To be specified at time of ordering.
Surge protection	6/6 kV

---

**Additional information**

---

Lifetime	Ta=25° L90B10 > 90000h
Energy efficiency class	C-D (Light source)

---

# DOC140 LED

## Ceiling luminaires

**we-ef**

### Options

#### Light distribution



symmetric, wide beam [B]



symmetric, medium beam [M]



symmetric, very narrow beam [EE]



symmetric, very narrow beam, sharp cut-off [EES]



wallwash [A20]



linear spread, very narrow beam [EE]



linear spread, very narrow beam, sharp cut-off [EES]

#### Colour temperature



3000 K



4000 K



2700 K

#### Nominal Watt








48 W

#### WE-EF LEUCHTEN GmbH

Töpinger Straße 16, 29646 Bispingen, Germany - Phone: +49 5194 909-0  
info@we-ef.com - <https://we-ef.com>

Subject to technical changes and errors. - Generated on 23/11/2024

### Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
linear spread, very narrow beam [EE] 	134-1756+134-1760	LED-24/48W / 700 mA - 3000 K	5545.2	54 W	80	4.00
	134-1757+134-1760	LED-24/48W / 700 mA - 4000 K	5927.6	54 W	80	4.00
linear spread, very narrow beam, sharp cut-off [EES] 	134-1758+134-1760	LED-24/48W / 700 mA - 3000 K	6104.9	54 W	80	4.00
	134-1759+134-1760	LED-24/48W / 700 mA - 4000 K	6526	54 W	80	4.00
symmetric, medium beam [M] 	134-1752	LED-24/48W / 700 mA - 3000 K	6047.2	54 W	80	4.00
	134-1753	LED-24/48W / 700 mA - 4000 K	6464.2	54 W	80	4.00
	134-1916	LED-24/48W / 700 mA - 2700 K	5630.1	54 W	80	4.00
symmetric, very narrow beam [EE] 	134-1756	LED-24/48W / 700 mA - 3000 K	5986.1	54 W	80	4.00
	134-1757	LED-24/48W / 700 mA - 4000 K	6398.9	54 W	80	4.00
	134-1917	LED-24/48W / 700 mA - 2700 K	5573.3	54 W	80	4.00
symmetric, very narrow beam, sharp cut-off [EES] 	134-1758	LED-24/48W / 700 mA - 3000 K	6442.7	54 W	80	4.00
	134-1759	LED-24/48W / 700 mA - 4000 K	6887	54 W	80	4.00
	134-1918	LED-24/48W / 700 mA - 2700 K	5998.4	54 W	80	4.00
symmetric, wide beam [B] 	134-1750	LED-24/48W / 700 mA - 3000 K	5388.5	54 W	80	4.00
	134-1751	LED-24/48W / 700 mA - 4000 K	5760.1	54 W	80	4.00
	134-1915	LED-24/48W / 700 mA - 2700 K	5016.9	54 W	80	4.00
wallwash [A20] 	134-1752+134-1761	LED-24/48W / 700 mA - 3000 K	4851.9	54 W	80	4.00
	134-1753+134-1761	LED-24/48W / 700 mA - 4000 K	5186.6	54 W	80	4.00

# DOC140 LED

## Ceiling luminaires



### Control

#### DALI interface

---

Description	Part ID	C
DALI interface	430-0013	90

---


#### WE-EF LEUCHTEN GmbH

Töpinger Straße 16, 29646 Bispingen, Germany - Phone: +49 5194 909-0  
info@we-ef.com - <https://we-ef.com>


Subject to technical changes and errors. - Generated on 23/11/2024

**Optical Accessories****Linear spread lens**

Description	Part ID	C1
IO-180-DOC140-LED	134-1760	160

**Flood lens**

Description	Part ID	C1
IO-360-DOC140-LED	134-1762	160




# DOC140 LED

## Ceiling luminaires

### Wallwash lens

Description	Part ID	C1
IO-20-WW-DOC140-LED	134-1761	160

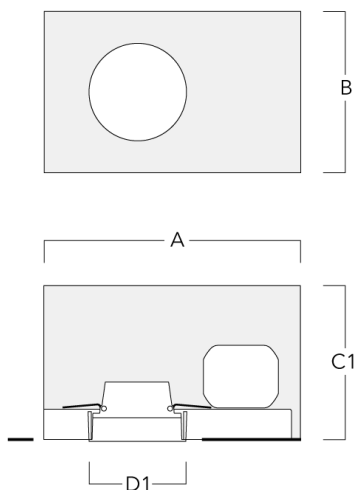


C1

### Mounting Accessories

#### Installation blackout, proud

Description	Part ID	A	B	C1	D1
BDO14-I	134-1763	443	324	192	216



#### Installation blackout, flush with shadow line

Description	Part ID	A	B	C1	D1	D2
BDO14-III	134-1764	443	324	192	216	267

