

### Description

IP66, Class I. Class II on request. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® gasket. Safety glass lens. Two cable entries. Integral EC electronic converter in thermally separated compartment. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. Factory installed LED circuit board. The luminaire is factory-sealed and does not need to be opened during the installation. Optional 2200 K version available. To be specified at time of ordering.

Suitable for mounting up to max. 40 mm ceiling thickness. A pre-installation blackout, proud or flush, is available and recommended for mounting in concrete ceilings. To be ordered separately.

The luminaire is not suitable for chlorine containing environments e.g. swimming pool. Special version suitable for chlorine containing environments, on request. Must be specified at time of ordering.

Specifications

Material description

Body	Marine-grade, die-cast aluminium alloy
Lens	Safety glass lens
Colours	<div><div></div> RAL9004 Signal black</div> <div><div></div> RAL9006 White aluminium</div> <div><div></div> RAL9007 Grey aluminium</div> <div><div></div> RAL7016 Anthracite grey</div> <div><div></div> RAL9016 Traffic white</div>
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE

Electrical description

Power supply	220-240V / 50-60 Hz
Driver / Ballast	Standard. Optional DALI version available. To be specified at time of ordering.
Surge protection	6/6 kV








Additional information




Lifetime	Ta=25° L90B10 > 90000h
Energy efficiency class	C-D (Light source)

**DOC140 LED**  
**Ceiling luminaires**










**Options**  
**Light distribution**

-  symmetric, wide beam [B]
-  symmetric, medium beam [M]
-  symmetric, very narrow beam [EE]
-  symmetric, very narrow beam, sharp cut-off [EES]
-  wallwash [A20]
-  linear spread, very narrow beam [EE]
-  linear spread, very narrow beam, sharp cut-off [EES]

Colour temperature	Nominal Watt
 3000 K	48 W
 4000 K	
 2700 K	

## Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
linear spread, very narrow beam [EE] 	134-1756+134-1760	LED-24/48W / 700 mA - 3000 K	5545.2	54 W	80	4.00
	134-1757+134-1760	LED-24/48W / 700 mA - 4000 K	5927.6	54 W	80	4.00
linear spread, very narrow beam, sharp cut-off [EES] 	134-1758+134-1760	LED-24/48W / 700 mA - 3000 K	6104.9	54 W	80	4.00
	134-1759+134-1760	LED-24/48W / 700 mA - 4000 K	6526	54 W	80	4.00
symmetric, medium beam [M] 	134-1752	LED-24/48W / 700 mA - 3000 K	6047.2	54 W	80	4.00
	134-1753	LED-24/48W / 700 mA - 4000 K	6464.2	54 W	80	4.00
	134-1916	LED-24/48W / 700 mA - 2700 K	5630.1	54 W	80	4.00
symmetric, very narrow beam [EE] 	134-1756	LED-24/48W / 700 mA - 3000 K	5986.1	54 W	80	4.00
	134-1757	LED-24/48W / 700 mA - 4000 K	6398.9	54 W	80	4.00
	134-1917	LED-24/48W / 700 mA - 2700 K	5573.3	54 W	80	4.00
symmetric, very narrow beam, sharp cut-off [EES] 	134-1758	LED-24/48W / 700 mA - 3000 K	6442.7	54 W	80	4.00
	134-1759	LED-24/48W / 700 mA - 4000 K	6887	54 W	80	4.00
	134-1918	LED-24/48W / 700 mA - 2700 K	5998.4	54 W	80	4.00
symmetric, wide beam [B] 	134-1750	LED-24/48W / 700 mA - 3000 K	5388.5	54 W	80	4.00
	134-1751	LED-24/48W / 700 mA - 4000 K	5760.1	54 W	80	4.00
	134-1915	LED-24/48W / 700 mA - 2700 K	5016.9	54 W	80	4.00
wallwash [A20] 	134-1752+134-1761	LED-24/48W / 700 mA - 3000 K	4851.9	54 W	80	4.00
	134-1753+134-1761	LED-24/48W / 700 mA - 4000 K	5186.6	54 W	80	4.00

**DOC140 LED**  
**Ceiling luminaires**



**Control**


**DALI interface**

Description	Part ID	C
DALI interface	430-0013	90

Optical Accessories


Linear spread lens

Description	Part ID	C1
IO-180-DOC140-LED	134-1760	160




Flood lens

Description	Part ID	C1
IO-360-DOC140-LED	134-1762	160



Wallwash lens


Description	Part ID	C1
IO-20-WW-DOC140-LED	134-1761	160



Mounting Accessories

Installation blackout, proud

Description	Part ID	A	B	C1	D1
BD014-I	134-1763	443	324	192	216

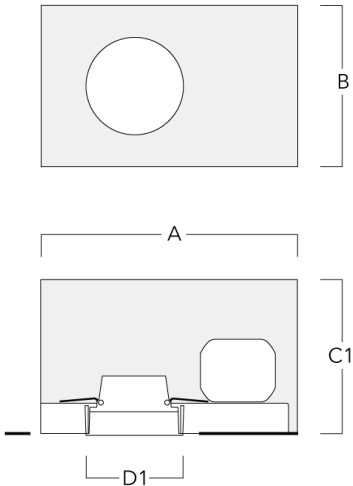

Installation blackout, flush with shadow line

Description	Part ID	A	B	C1	D1	D2
BD014-III	134-1764	443	324	192	216	267

