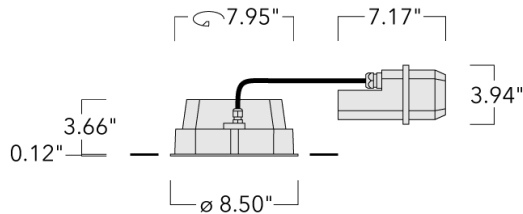


# DOC140 LED [For Remodel]

## Ceiling Luminaires

**we-ef**



### Description

DOC140 LED for remodel projects. For new construction, see DOC140 LED [New Construction] version.

IP66, Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Separate IP66 driver housing. CAD-optimized optics for superior illumination and glare control. OLC® One LED Concept. Factory installed LED circuit board. 0-10V Dimming comes standard with luminaire.

A pre-installation blockout, proud or flush, is available and recommended for mounting in concrete ceilings; to be ordered separately.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX - 9004 (Black)

+ XXX-XXXX (Accessory 1)

### WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 08/15/2025

Ceiling Luminaires

Specifications  
Material description

Body	Marine-grade, die-cast aluminium alloy
Lens	Safety glass lens
Colors	<div><div></div> RAL9004 Black</div> <div><div></div> RAL9007 Grey Metallic</div> <div><div></div> RAL9016 White</div> <div><div></div> RAL8019 Dark Bronze</div>
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE

Electrical description

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Driver / Ballast	Integral EC electronic converter in thermally-separated compartment

Additional information

Lifetime	Ta=25°/40° L90B10 > 90000h
Listings	Contact WE-EF USA for ETL/UL certification status.

# DOC140 LED [For Remodel]



## Ceiling Luminaires

### Options

#### Light distribution



symmetric, wide beam [W]



symmetric, medium beam [M]



symmetric, very narrow beam [VN]



symmetric, very narrow beam, 'sharp cut-off' [VNS]



wallwash [A20]



linear spread, very narrow beam



linear spread, very narrow beam, 'sharp cut-off'

#### Color temperature



3000 K



4000 K



2700 K

#### Nominal Watt






48 W

#### WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030  
customersupport.usa@we-ef.com - <https://we-ef.com/us>  
Subject to technical changes and errors. - Generated on 08/15/2025

## Ceiling Luminaires

## Configurations

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI	Weight (lb)
linear spread, very narrow beam, 'sharp cut-off'	134-1758+134-1760	LED-24/48W / 700 mA - 3000 K	6104.9	54 W	80	8.81
	134-1759+134-1760	LED-24/48W / 700 mA - 4000 K	6526	54 W	80	8.81
	134-1756+134-1760	LED-24/48W / 700 mA - 3000 K	5545.2	54 W	80	8.81
	134-1757+134-1760	LED-24/48W / 700 mA - 4000 K	5927.6	54 W	80	8.81
symmetric, medium beam [M] 	134-1752	LED-24/48W / 700 mA - 3000 K	6047.2	54 W	80	8.81
	134-1753	LED-24/48W / 700 mA - 4000 K	6464.2	54 W	80	8.81
	134-1916	LED-24/48W / 700 mA - 2700 K	5630.1	54 W	80	8.81
symmetric, very narrow beam [VN] 	134-1756	LED-24/48W / 700 mA - 3000 K	5986.1	54 W	80	8.81
	134-1757	LED-24/48W / 700 mA - 4000 K	6398.9	54 W	80	8.81
	134-1917	LED-24/48W / 700 mA - 2700 K	5573.3	54 W	80	8.81
symmetric, very narrow beam, 'sharp cut-off' [VNS] 	134-1758	LED-24/48W / 700 mA - 3000 K	6442.7	54 W	80	8.81
	134-1759	LED-24/48W / 700 mA - 4000 K	6887	54 W	80	8.81
	134-1918	LED-24/48W / 700 mA - 2700 K	5998.4	54 W	80	8.81
symmetric, wide beam [W] 	134-1750	LED-24/48W / 700 mA - 3000 K	5388.5	54 W	80	8.81
	134-1751	LED-24/48W / 700 mA - 4000 K	5760.1	54 W	80	8.81
	134-1915	LED-24/48W / 700 mA - 2700 K	5016.9	54 W	80	8.81
wallwash [A20]	134-1752+134-1761	LED-24/48W / 700 mA - 3000 K	4851.9	54 W	80	8.81
	134-1753+134-1761	LED-24/48W / 700 mA - 4000 K	5186.6	54 W	80	8.81

## WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030


customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 08/15/2025

DOC140 LED [For Remodel]

Ceiling Luminaires



Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI	Weight (lb)
						

Optical Accessories

Linear spread lens


Description	Part ID	C1
IO-180-DOC140-LED	134-1760	6.29



Ceiling Luminaires


Softening Lens

Description	Part ID	C1
IO-360-DOC140-LED	134-1762	6.29



Wallwash lens


Description	Part ID	C1
IO-20-WW-DOC140-LED	134-1761	6.29



Mounting Accessories

Installation blackout

Description	Part ID	A	B	C1	D1
BD014-I	134-1763	14.45"	12.75"	4.53"	8.5"

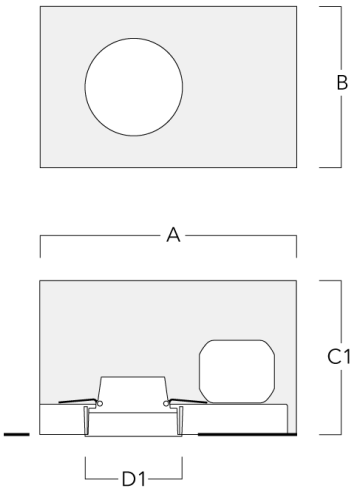



Ceiling Luminaires

Installation blackout, flush with shadow line

Description	Part ID	A	B	C1	D1	D2
BD014-III	134-1764	14.45	12.75	5.70	8.5	10.5

