

Description

IP66, Class I. IK10. Marine-grade, all-aluminium construction. 5CE superior corrosion protection including PCS hardware. Polycarbonate lens. Silicone CCG[®] Controlled Compression Gasket. Luminaire is factory-sealed and does not need to be opened during installation.

Integral EC electronic converter in thermally-separated compartment. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control.

Two-sided light output versions for 360° symmetric distribution.
One-sided light output versions with 'rearward glow' feature. Ideal for pathway lighting applications.

Luminaire spacing up to 5-8 m.

Specifications**Material description**

Body	Marine-grade, all-aluminium construction
Lens	Polycarbonate
Colours	 RAL9004 Signal black  RAL9007 Grey aluminium  RAL7016 Anthracite grey  RAL9016 Traffic white
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS hardware
Ingress protection	IP66
Impact resistance	IK10
Corrosion resistance	5CE

Electrical description

Driver / Ballast	Integral EC electronic converter in thermally-separated compartment
Surge protection	10/10 kV

Additional information

BUG Rating	Please see individual Spec Sheets for classification of Backlight, Uplight and Glare
------------	--

Options

Light distribution



symmetric distribution [C60]



rectangular, side throw [R65]


Colour temperature



3000 K



4000 K





2700 K

Nominal Watt

0 W


Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
rectangular, side throw [R65] 	114-9065	LED-3/9W / 1050 mA - 3000 K	519.7	11 W	80	4.5
	114-9066	LED-3/9W / 1050 mA - 4000 K	543.9	11 W	80	4.5
	114-9067	LED-3/13W / 1400 mA - 3000 K	664.7	14 W	80	4.5
	114-9068	LED-3/13W / 1400 mA - 4000 K	694.9	14 W	80	4.5
	114-9075	LED-3/9W / 1050 mA - 2700 K	495.5	11 W	80	4.5
	114-9076	LED-3/13W / 1400 mA - 2700 K	628.5	14 W	80	4.5
symmetric distribution [C60] 	114-9071	LED-6/18W / 1050 mA - 3000 K	825	21 W	80	4.5
	114-9072	LED-6/18W / 1050 mA - 4000 K	863.4	21 W	80	4.5
	114-9073	LED-6/26W / 1400 mA - 3000 K	1055.3	27 W	80	4.5
	114-9074	LED-6/26W / 1400 mA - 4000 K	1103.3	27 W	80	4.5
	114-9077	LED-6/18W / 1050 mA - 2700 K	786.7	21 W	80	4.5
	114-9078	LED-6/26W / 1400 mA - 2700 K	997.7	27 W	80	4.5

Mounting Accessories

Planted root

Description	Part ID	D1	D2	D3	D4	H1	H2	M1	T1	T2	Weight (kg)
Planted root ESV4	300-0461-AP	150	130	60	89	400	350	8	200	50 x 100	3.85

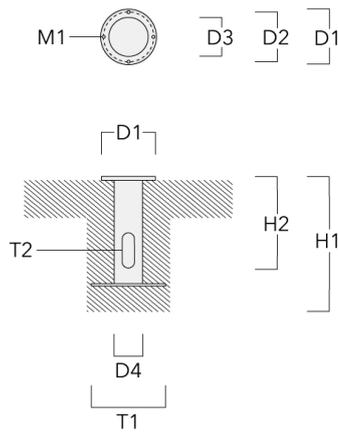

Optical Accessories**Light shield**

Description	Part ID	H1	Weight (kg)
Cut-off shield IL-180	114-9185	66	0.02

