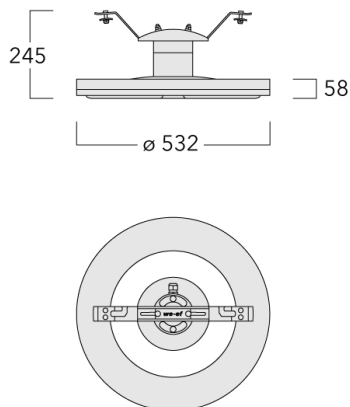


CFS530 LED

Catenary luminaires

we-ef



Description

IP66, Class I. IK08. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. RFC™ Reflection Free Contour main lens.

Integral EC electronic converter in thermally separated compartment. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. Factory installed LED circuit board. The luminaire is factory-sealed and does not need to be opened during installation. Optional 2200 K version available. To be specified at time of ordering.

Includes cable connector, for cable 9-14 mm. +/- 14° adjustable to compensate for sloping catenary systems.





WE-EF LIGHTING (Thailand) Co., Ltd.

57 Moo 5, Kingkaew Rd., Bangplee, 10540 Samutprakarn - Phone: +66 2 738 96 20 - Fax: +66 2 738 96 29

<https://we-ef.com/asia>

Subject to technical changes and errors. - Generated on 23/11/2024

Catenary luminaires**Specifications****Material description**

Body	Marine-grade, die-cast aluminium alloy
Lens	RFC™ Reflection Free Contour main lens
Colours	 RAL9004 Signal black  RAL9007 Grey aluminium  RAL7016 Anthracite grey  RAL9016 Traffic white
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP66
Impact resistance	IK08
Corrosion resistance	5CE
Windage	0.13 m ²

Electrical description

Driver / Ballast	Integral EC electronic converter in thermally separated compartment
------------------	---

Additional information

Lifetime	Ta=25° L90B10 > 90000h
----------	------------------------

CFS530 LED

Catenary luminaires

Options

Light distribution



controlled symmetric distribution [C50]



rectangular [R]

Colour temperature



3000 K



4000 K



2700 K

Nominal Watt



0 W

CFS530 LED

Catenary luminaires

we-ef

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
controlled symmetric distribution [C50] 	105-0154	LED-24/24W / 350 mA - 3000 K	3512.6	26.5 W	80	10.90
	105-0155	LED-24/24W / 350 mA - 4000 K	3852.5	26.5 W	80	10.90
	105-0162	LED-24/48W / 700 mA - 3000 K	6254.3	54 W	80	10.90
	105-0163	LED-24/48W / 700 mA - 4000 K	6685.6	54 W	80	10.90
	105-0247	LED-24/48W / 700 mA - 2700 K	5822.9	54 W	80	10.90
rectangular [R] 	105-0156	LED-24/24W / 350 mA - 3000 K	3474.7	26.5 W	80	10.90
	105-0157	LED-24/24W / 350 mA - 4000 K	3810.9	26.5 W	80	10.90
	105-0164	LED-24/48W / 700 mA - 3000 K	6186.6	54 W	80	10.90
	105-0165	LED-24/48W / 700 mA - 4000 K	6613.3	54 W	80	10.90
	105-0248	LED-24/48W / 700 mA - 2700 K	5759.9	54 W	80	10.90

WE-EF LIGHTING (Thailand) Co., Ltd.

57 Moo 5, Kingkaew Rd., Bangplee, 10540 Samutprakarn - Phone: +66 2 738 96 20 - Fax: +66 2 738 96 29

<https://we-ef.com/asia>

Subject to technical changes and errors. - Generated on 23/11/2024