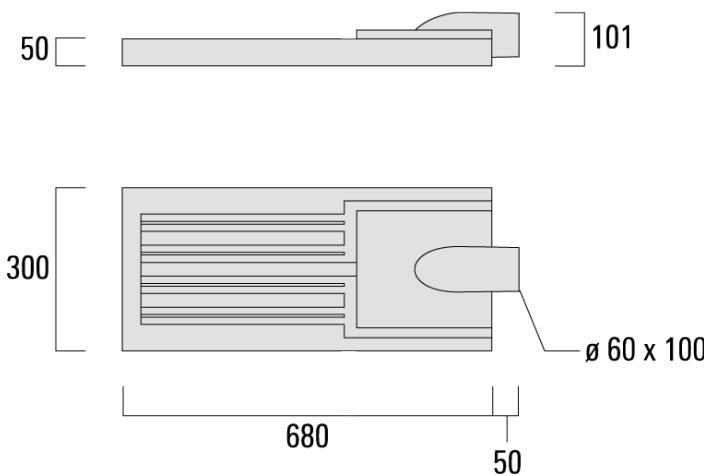


Tennis Court Lighting**Description**

IP66. IK08. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. RFC™ Reflection Free Contour main lens. Silicone CCG® Controlled Compression Gasket. Luminaire is factory-sealed and does not need to be opened during installation.

Advanced thermal management protects LEDs while optimising lumens output. Removable LED boards for upgrading. CAD-optimised OLC® One LED Concept optics for superior illumination and glare control. Remote EC electronic converter, IP66.

TM-C 80 poles. Tubular steel, constant section, hot dipped galvanised. Powdercoat finish to match luminaire. Surface mounting flange plate. Service door including PCS hardware.

Attention: This product is suitable for operation in exterior tennis court installations only.

Tennis Court Lighting**Specifications****Material description**

Body	Marine-grade, die-cast aluminium alloy
Lens	RFCTM Reflection Free Contour main lens
Colours	 RAL9004 Signal black  RAL9007 Grey aluminium  RAL7016 Anthracite grey  RAL9016 Traffic white
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP66
Impact resistance	IK08
Corrosion resistance	5CE
Windage	0.046

Electrical description

Driver / Ballast	Integral EC electronic converter
Surge protection	10 kV

Additional information

Poles	TM-C 80 poles. Tubular steel, constant section, hot dipped galvanised. Powdercoat finish to match luminaire. Surface mounting flange plate. Service door including PCS hardware.
Attention:	This product is suitable for operation in exterior tennis court installations only.

Tennis Court Lighting**Options****Light distribution**

asymmetric, forward throw [A60]


Colour temperature

4000 K

Nominal Watt


0 W

Tennis Court Lighting**Configurations**


Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
asymmetric, forward throw [A60] 	108-9075	LED-48/207W / 1400 mA - 4000 K	22749	209 W	80	8.2

Tennis Court Lighting**Mounting Accessories****TM-C 80 poles**

Description	Part ID	Weight (kg)
TM-C 80 140 - 2VFL Lighting column (1 x 2 VFL540-SE)	270-9210	190

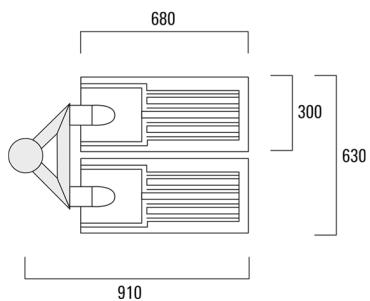

TM-C 80 140 - 4VFL.B Lighting column (2 x 2 VFL540-SE - 180°)	270-9211	195
--	----------	-----

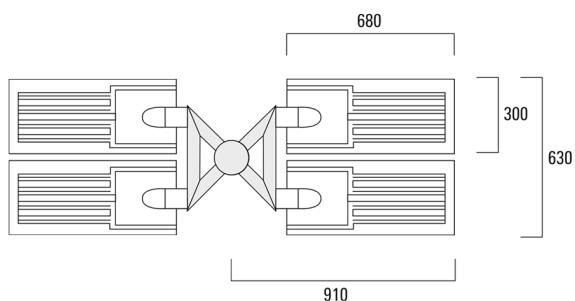

Tennis Court Lighting

Description	Part ID	Weight (kg)
TM-C 80 140 - 4VFL.L Lighting column (2 x 2 VFL540-SE - 100°)	270-9212	198

