


Floodlights

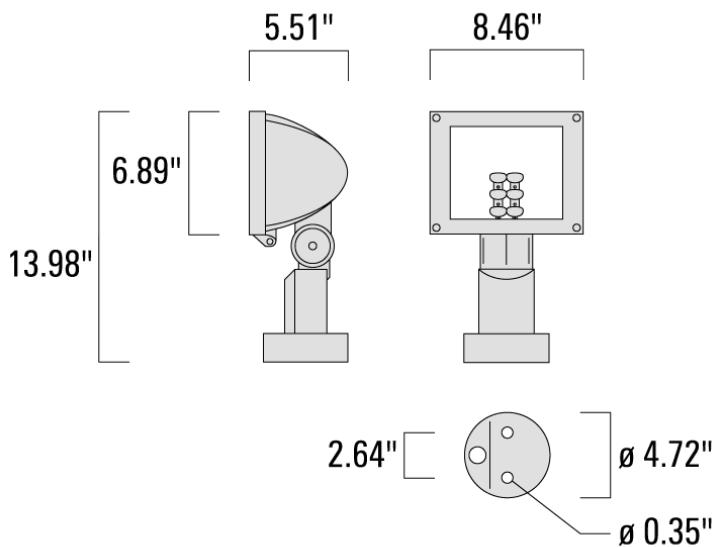

Floodlights**Specifications****Material description**

Body	Marine-grade, die-cast aluminium alloy
Lens	Safety glass
Colors	 RAL9004 Black  RAL9007 Grey Metallic  RAL9016 White  RAL8019 Dark Bronze
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS hardware
Ingress protection	IP66
Impact resistance	IK08
Corrosion resistance	5CE

Electrical description

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Driver / Ballast	Integral EC electronic converter in thermally-separated compartment

Additional information

Listings	UL 1598, CSA C22.2 #250.0 (Intertek)
----------	--------------------------------------

Floodlights**Options****Light distribution****Color temperature****Nominal Watt**

[P65] Type II Medium



3000 K

0 W



[S70] Type II Short



4000 K



[A60] Type IV Very Short



[R65] Type IV Medium


Floodlights

Configurations

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI	Weight (lb)
[A60] Type IV Very Short	161-5872	LED-6/18W / 1050 mA - 3000 K	1468.7	21 W	80	8.59
	161-5873	LED-6/26W / 1400 mA - 3000 K	1878.6	27 W	80	8.59
	161-5874	LED-6/18W / 1050 mA - 4000 K	1537	21 W	80	8.59
	161-5875	LED-6/26W / 1400 mA - 4000 K	1964	27 W	80	8.59
[P65] Type II Medium	161-5864	LED-6/18W / 1050 mA - 3000 K	1523.7	21 W	80	8.59
	161-5865	LED-6/26W / 1400 mA - 3000 K	1948.9	27 W	80	8.59
	161-5866	LED-6/18W / 1050 mA - 4000 K	1594.6	21 W	80	8.59
	161-5867	LED-6/26W / 1400 mA - 4000 K	2037.5	27 W	80	8.59
[R65] Type IV Medium	161-5868	LED-6/18W / 1050 mA - 3000 K	1457.1	21 W	80	8.59
	161-5869	LED-6/26W / 1400 mA - 3000 K	1863.7	27 W	80	8.59
	161-5870	LED-6/18W / 1050 mA - 4000 K	1524.9	21 W	80	8.59
	161-5871	LED-6/26W / 1400 mA - 4000 K	1948.5	27 W	80	8.59
[S70] Type II Short	161-5860	LED-6/18W / 1050 mA - 3000 K	1597.1	21 W	80	8.59
	161-5861	LED-6/26W / 1400 mA - 3000 K	2042.8	27 W	80	8.59
	161-5862	LED-6/18W / 1050 mA - 4000 K	1671.3	21 W	80	8.59
	161-5863	LED-6/26W / 1400 mA - 4000 K	2135.6	27 W	80	8.59


Floodlights**Optical Accessories****Wire guard**

Description	Part ID	C1	H1
Wire guard EG	161-9118	7.13	6.02

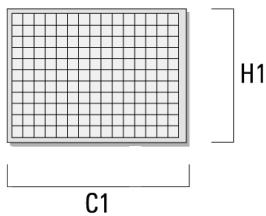


Floodlights**Barn doors**

Description	Part ID	A	H1
Barn doors ED	161-9119	9.65	5.2

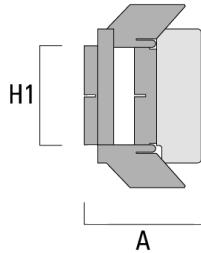
**Glare shield**

Description	Part ID	A	H1
Glare shield ES	161-9121	6.5	5.20

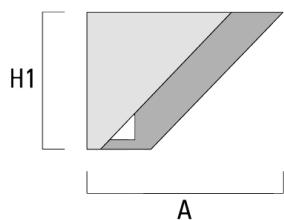


Floodlights**Honeycomb louvre**

Description	Part ID	C1
Honeycomb Louvre IW	146-0625	4.33




Floodlights**Mounting Accessories****Planted root**

Description	Part ID	D1	D2	D3	D4	H1	H2	M1	Weight (lb)
Planted root ESV4	300-0461	5.71	5.12	2.36	3.50	15.75	13.78	.31	8.44

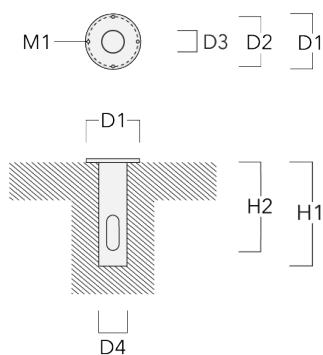


Floodlights**Pipe clamp SP**

Description	Part ID	D1	Weight (lb)	D
SP1-2/M8 Pipe clamp, single (Ø 1.5"-2.36")	146-0245	38-60	1.10	38-66

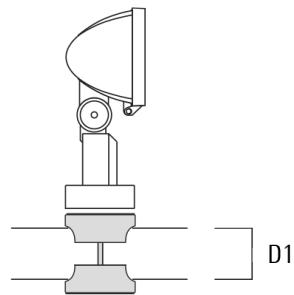


SP1-2/M8 Pipe clamp, single (Ø 3"-3.5")	146-0246	76-89	1.10	76-89
---	----------	-------	------	-------

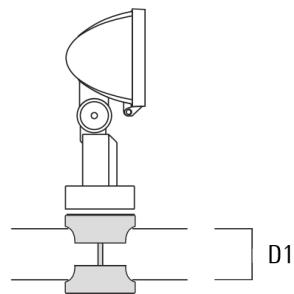


Floodlights

Description	Part ID	D1	Weight (lb)	D
SP2-2/M8 Pipe clamp, double (Ø 1.5"-2.36")	146-0247	1.50"-2.36"	2.20 lbs	38-66

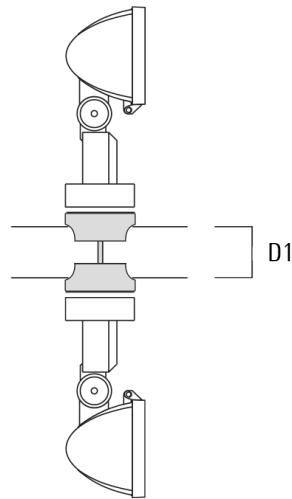


SP2-2/M8 Pipe clamp, double (Ø 3"-3.5")	146-0248	3.0"-3.5"	2.65 lbs	76-89
---	----------	-----------	----------	-------

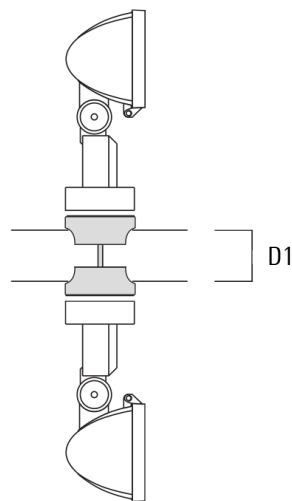

Floodlights**Junction box JB1**

Description	Part ID	D1	D2	M1	Weight(lb)
JB1 Junction box	310-9000	5.31	2.64	0.35	1.60

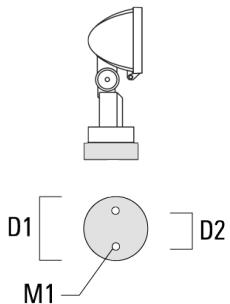**Short post EM**

Description	Part ID	M1	Weight(lb)
Short post EM1-2/M8 for FLB141	146-0253	.35	1.70

