

FLB141 LED Surface mounted - Asymmetric

Projectors


we-ef



Description

IP66, Class I. IK08. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Safety glass lens, hinged. Silicone CCG® Controlled Compression Gasket. Luminaire is factory-sealed and does not need to be opened during installation.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept.

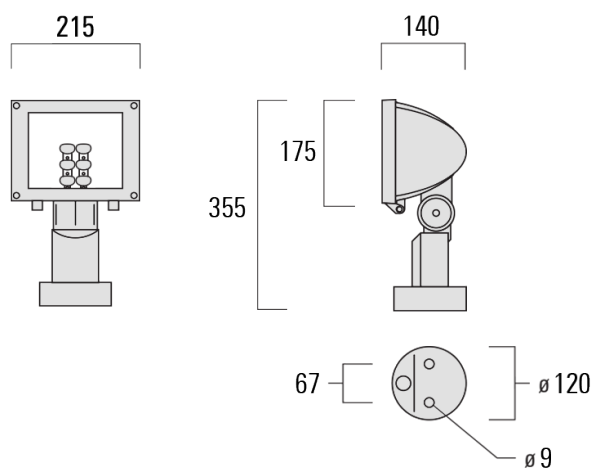

Projectors

Specifications

Material description

Body	Marine-grade, die-cast aluminium alloy
Lens	Safety glass
Colours	RAL9004 Signal black RAL9007 Grey aluminium RAL7016 Anthracite grey RAL9016 Traffic white
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS hardware
Ingress protection	IP66
Impact resistance	IK08
Corrosion resistance	5CE

Electrical description


Driver / Ballast	Integral EC electronic converter in thermally-separated compartment
------------------	---

Additional information





FLB141 LED Surface mounted - Asymmetric
Projectors



Options

Light distribution	Colour temperature	Nominal Watt
 pedestrian/bicycle lane [P65]	 3000 K	0 W
 asymmetric, side throw [S70]	 4000 K	
 asymmetric, forward throw [A60]		
 rectangular, side throw [R65]		


Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
asymmetric, forward throw [A60] 	161-5872	LED-6/18W / 1050 mA - 3000 K	1468.7	21 W	80	3.8
	161-5873	LED-6/26W / 1400 mA - 3000 K	1878.6	27 W	80	3.8
	161-5874	LED-6/18W / 1050 mA - 4000 K	1537	21 W	80	3.8
	161-5875	LED-6/26W / 1400 mA - 4000 K	1964	27 W	80	3.8
asymmetric, side throw [S70] 	161-5860	LED-6/18W / 1050 mA - 3000 K	1597.1	21 W	80	3.8
	161-5861	LED-6/26W / 1400 mA - 3000 K	2042.8	27 W	80	3.8
	161-5862	LED-6/18W / 1050 mA - 4000 K	1671.3	21 W	80	3.8
	161-5863	LED-6/26W / 1400 mA - 4000 K	2135.6	27 W	80	3.8
pedestrian/bicycle lane [P65] 	161-5864	LED-6/18W / 1050 mA - 3000 K	1523.7	21 W	80	3.8
	161-5865	LED-6/26W / 1400 mA - 3000 K	1948.9	27 W	80	3.8
	161-5866	LED-6/18W / 1050 mA - 4000 K	1594.6	21 W	80	3.8
	161-5867	LED-6/26W / 1400 mA - 4000 K	2037.5	27 W	80	3.8
rectangular, side throw [R65] 	161-5868	LED-6/18W / 1050 mA - 3000 K	1457.1	21 W	80	3.8
	161-5869	LED-6/26W / 1400 mA - 3000 K	1863.7	27 W	80	3.8
	161-5870	LED-6/18W / 1050 mA - 4000 K	1524.9	21 W	80	3.8
	161-5871	LED-6/26W / 1400 mA - 4000 K	1948.5	27 W	80	3.8

Optical Accessories


Wire guard

Description	Part ID	C1	H1
Wire guard EG	161-9118	181	153




Barn doors

Description	Part ID	A	H1
Barn doors ED	161-9119	245	132




Glare shield

Description	Part ID	A	H1
Glare shield ES	161-9121	165	132



Snoot

Description	Part ID	A	H1
Snoot ET	161-9122	135	155



Control

1-10 V analogue dimming interface

Description	Part ID	C
1-10 V analogue dimming interface	430-0011	90


DALI interface

Description	Part ID	Additional information	C
DALI interface	430-0013	DALI variant. The luminaire is equipped with a DT6 Dali driver (Dali 2.0). Dali 2.0 -Application controllers and Input devices defined -Single-masters and multi-masters allowed -Event priorities defined -Separate addressing & grouping from control gear Note: Mixing Dali 1 and Dali 2.0 drivers can cause problems because the addressing and the command scope has changed!	90

Mounting Accessories


Planted root

Description	Part ID	D1	D2	D3	D4	H1	H2	M1	T1	T2	Weight (kg)
Planted root ESV4	300-0461-AP	150	130	60	89	400	350	8	200	50 x 100	3.85

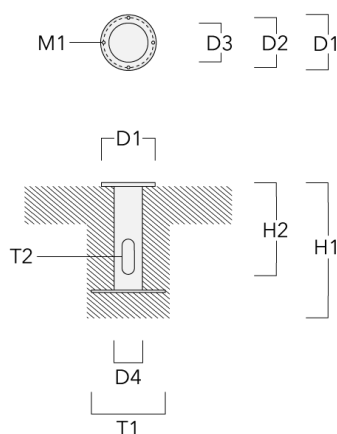

Pole clamp


Description	Part ID	D1	Weight (kg)	D
Pole clamp SP1-2/M8, single (Ø 38-60)	146-0245	38-60	1.10	38-66




FLB141 LED Surface mounted - Asymmetric

Projectors

Description	Part ID	D1	Weight (kg)	D
Pole clamp SP1-2/M8, single (Ø 76-89)	146-0246	76-89	1.10	76-89




Pole clamp SP2-2/M8, double (Ø 38-60)	146-0247	38-60	1	38-66
---------------------------------------	----------	-------	---	-------

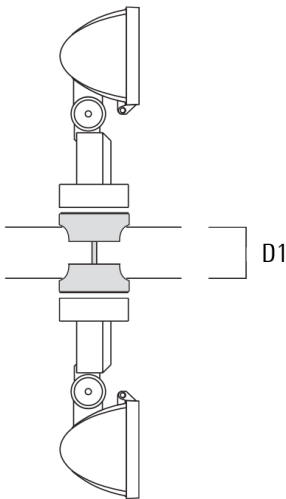

FLB141 LED Surface mounted - Asymmetric


Projectors

Description	Part ID	D1	Weight (kg)	D
Pole clamp SP2-2/M8, double (Ø 76-89)	146-0248	76-89	1.20	76-89

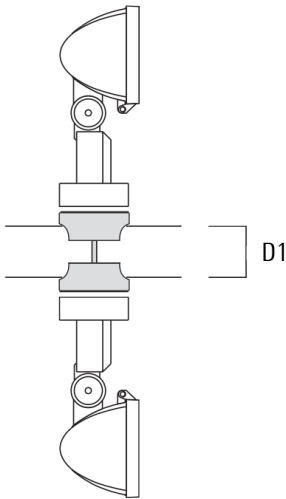


Junction box

Description	Part ID	D1	D2	M1	Weight (kg)
Junction box JB1	310-9000	135	67	9	1.6



Ground spike

Description	Part ID	Weight (kg)
Ground spike EF1-2/M8 for FLB141	146-0251	0.40

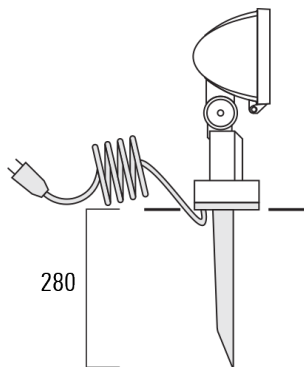

Short post

Description	Part ID	Weight (kg)
Short post EM1-2/M8 for FLB141	146-0253	1.70

